

Commercial Cement Plaster 3™



Fiberglass Reinforced Portland Cement Plaster with
Integral Fluid Applied Air/Water-Resistive Barrier

DS826

Commercial Cement Plaster (CCP) 3 Installation Details

Table of Contents

Detail

CCP-3 CUTAWAY	CCP-3 1
OPENING PREPARATION BACKSTOP® NTX / AQUAFLASH® SYSTEM	CCP-3 2
TERMINATION AT WOOD WINDOW	CCP-3 3
TERMINATION AT SELF FLASHING NAIL-ON WINDOW	CCP-3 4
TERMINATION AT STOREFRONT WINDOW- JAMB	CCP-3 5
TERMINATION AT STOREFRONT WINDOW HEAD-SILL	CCP-3 6
TERMINATION AT STOREFRONT WINDOW SETBACK	CCP-3 7
TERMINATION AT CONCRETE FOUNDATION OUTSIDE CORNER	CCP-3 8
INSIDE CORNER DETAIL	CCP-3 9
HORIZONTAL FLASHING & EXPANSION JOINT	CCP-3 10
SLOPED SILL	CCP-3 11
TERMINATION AT ROOF	CCP-3 12
TERMINATION AT ROOF/WALL INTERSECTION	CCP-3 13
TERMINATION AT PARAPET FLASHING	CCP-3 14
EPS CORNICE	CCP-3 15
CONTROL JOINT INTERSECTION	CCP-3 16
HORIZONTAL OR VERTICAL ONE-PIECE EXPANSION JOINT	CCP-3 17
	CCP-3 18

NOTE:
 DRYVIT MAKES NO REPRESENTATION REGARDING CONFORMITY OF ITS SUGGESTIONS TO MODEL BUILDING CODES, ENGINEERING CRITERIA, SPECIFIC APPLICATIONS, OR PROJECT LOCATIONS. ALL COMPONENTS INDICATED IN ILLUSTRATIONS, AS WELL AS OTHERS THAT MAY BE REQUIRED FOR THE INTEGRITY OF THE SYSTEM SHALL BE DESIGNED, DETAILED, AND ENGINEERED BY REPRESENTATIVES OF THE ARCHITECT, OWNER, OR CONTRACTOR TO BE IN CONFORMANCE WITH MODEL CODES, ARCHITECTURAL, AND ENGINEERING REQUIREMENTS PERTAINING TO SPECIFIC BUILDING PROJECTS.

DRYVIT MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE ARCHITECTURAL DESIGN, ENGINEERING, OR WORKMANSHIP OF PROJECTS UTILIZING DRYVIT SYSTEMS OR PRODUCTS.

THE LIABILITIES OF DRYVIT SHALL BE AS STATED IN THE DRYVIT STANDARD WARRANTY. CONTACT DRYVIT FOR A FULL AND COMPLETE COPY OF THE WARRANTY.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Table of Contents

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 TOC



Construction Products Group

www.tremcocpg.com

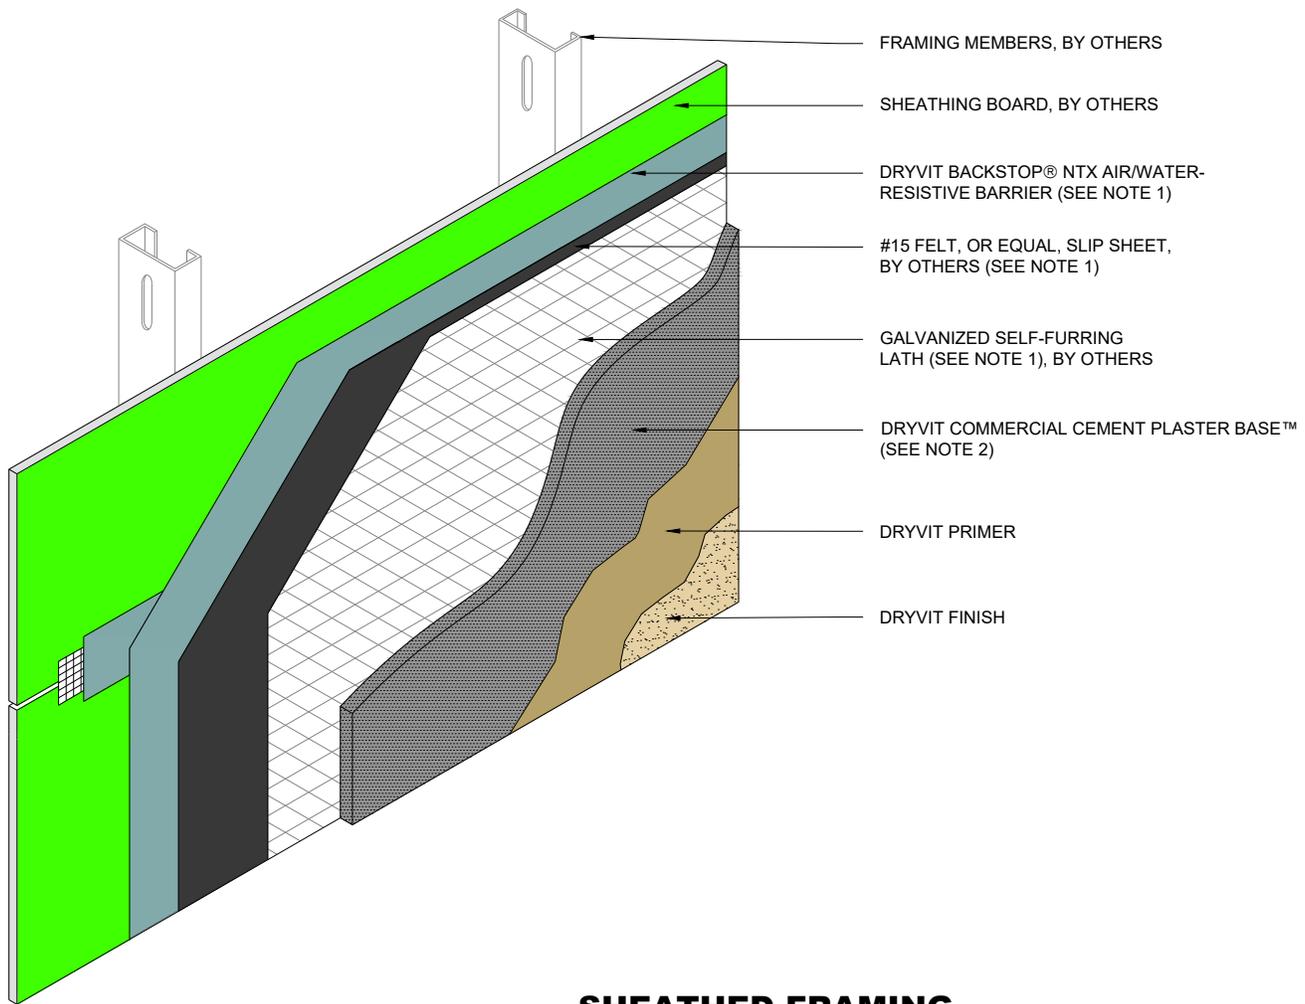

SHEATHED FRAMING
SUBSTRATE

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: CCP-3 Cutaway

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 1



Construction Products Group


www.tremcocpg.com

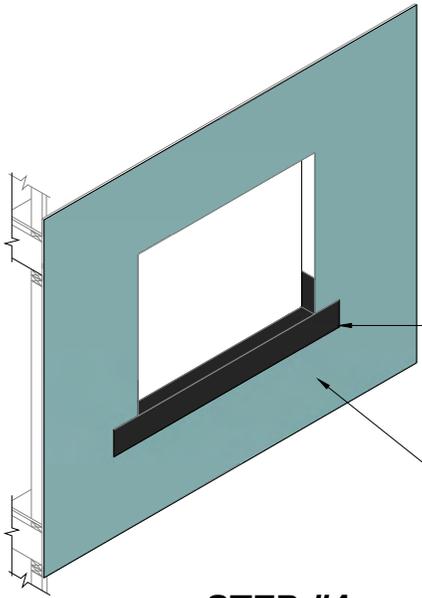

APPLY DRYVIT AQUAFLASH® SYSTEM (SEE NOTES 1 AND 3)


DRYVIT BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER COATING

STEP #1

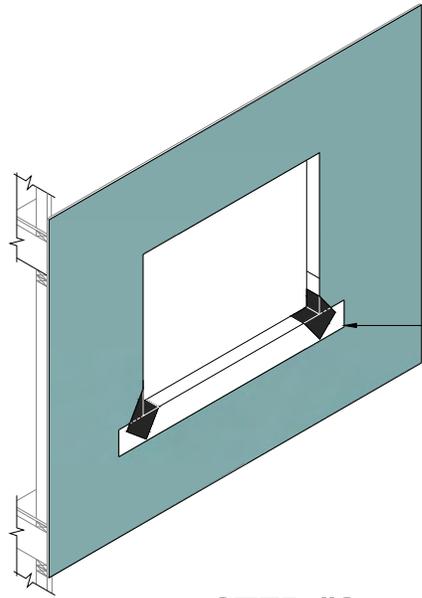


INSTALL DIAGONAL STRIP OF DRYVIT AQUAFLASH® MESH AND AQUAFLASH® AT CORNERS (SEE NOTES 1 AND 3)

STEP #2

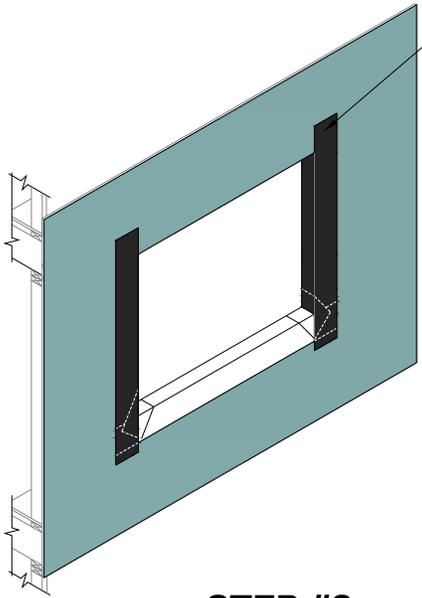

INSTALL DRYVIT AQUAFLASH® SYSTEM AT JAMBS (SEE NOTES 1 AND 3)

STEP #3

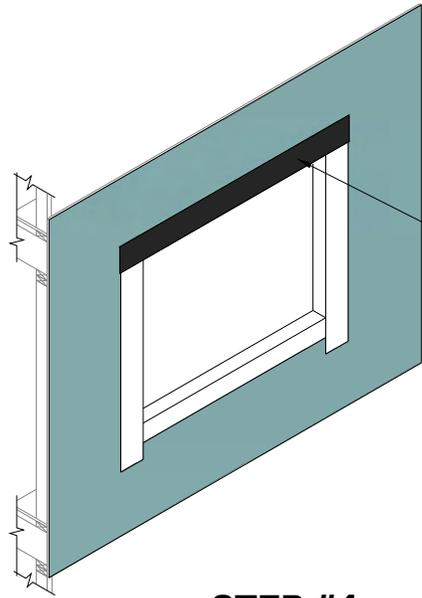

INSTALL DRYVIT AQUAFLASH® SYSTEM AT HEADS (SEE NOTES 1, 2, AND 3)

STEP #4

NOTE:

1. DRYVIT AQUAFLASH® SHALL EXTEND TO INTERIOR FACE OF OPENING.
2. REFER TO HEAD, SILL AND JAMB DETAILS FOR FLASHING INTEGRATION.
3. ASSOCIATED FLASHINGS PER MANUFACTURER'S RECOMMENDATIONS, CODE REQUIREMENTS AND PROJECT DOCUMENTS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Opening Preparation Backstop® NTX/ AquaFlash® System

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 2




Construction Products Group


www.tremcocpg.com

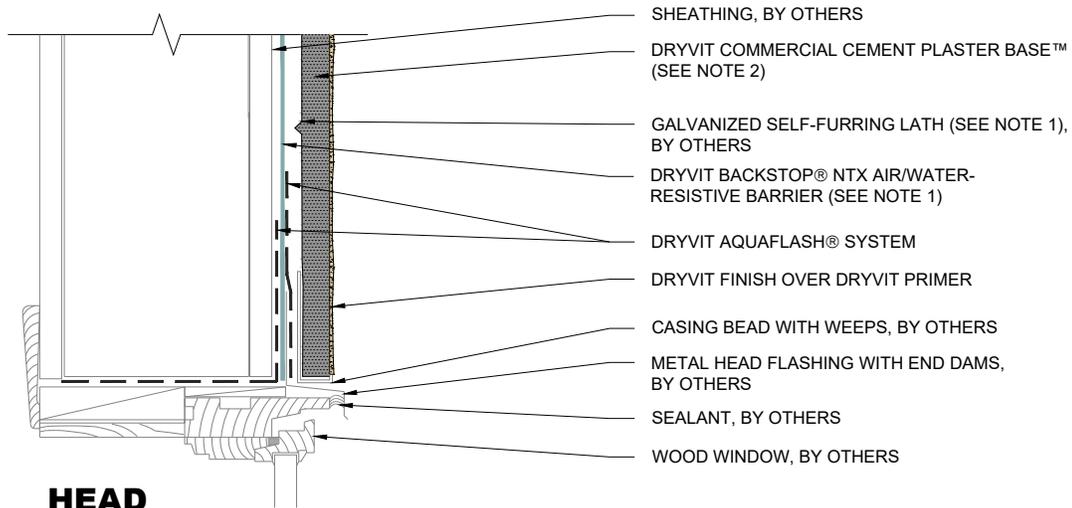

HEAD

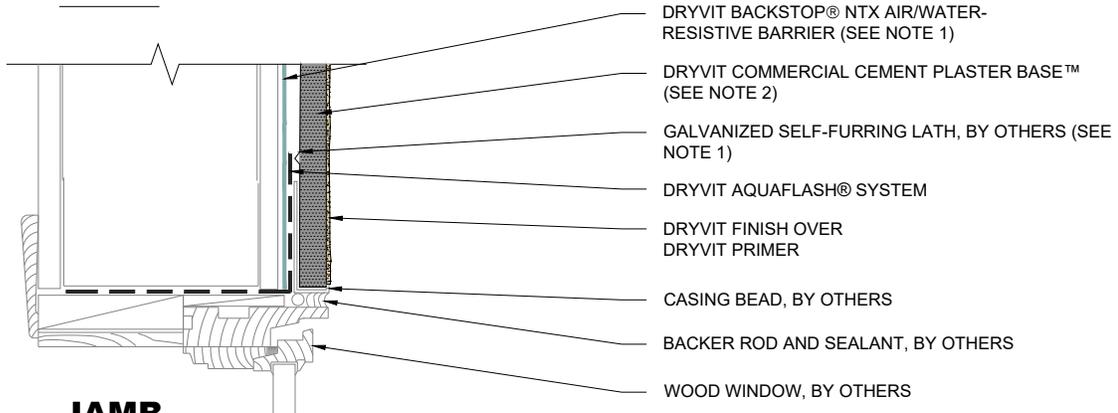

JAMB

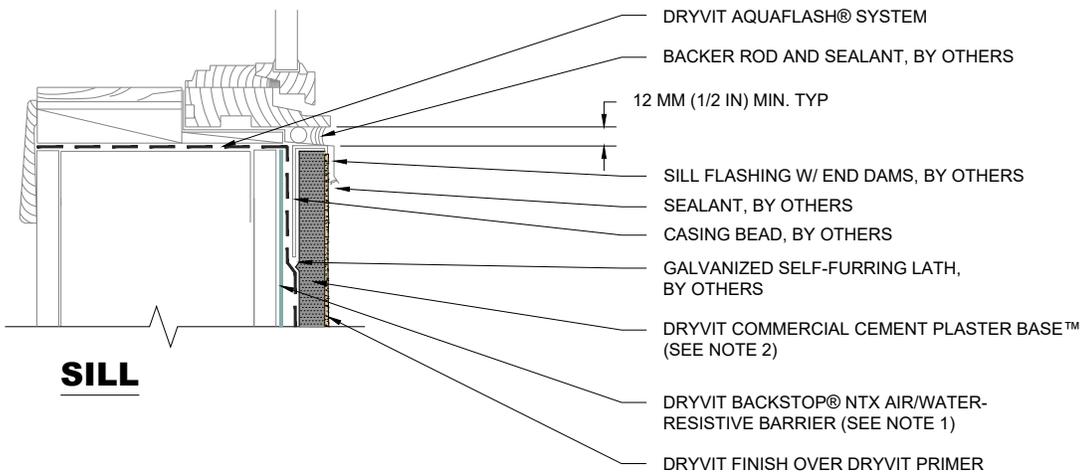

SILL

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Termination at Wood Window

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 3




Construction Products Group

www.tremcocpg.com

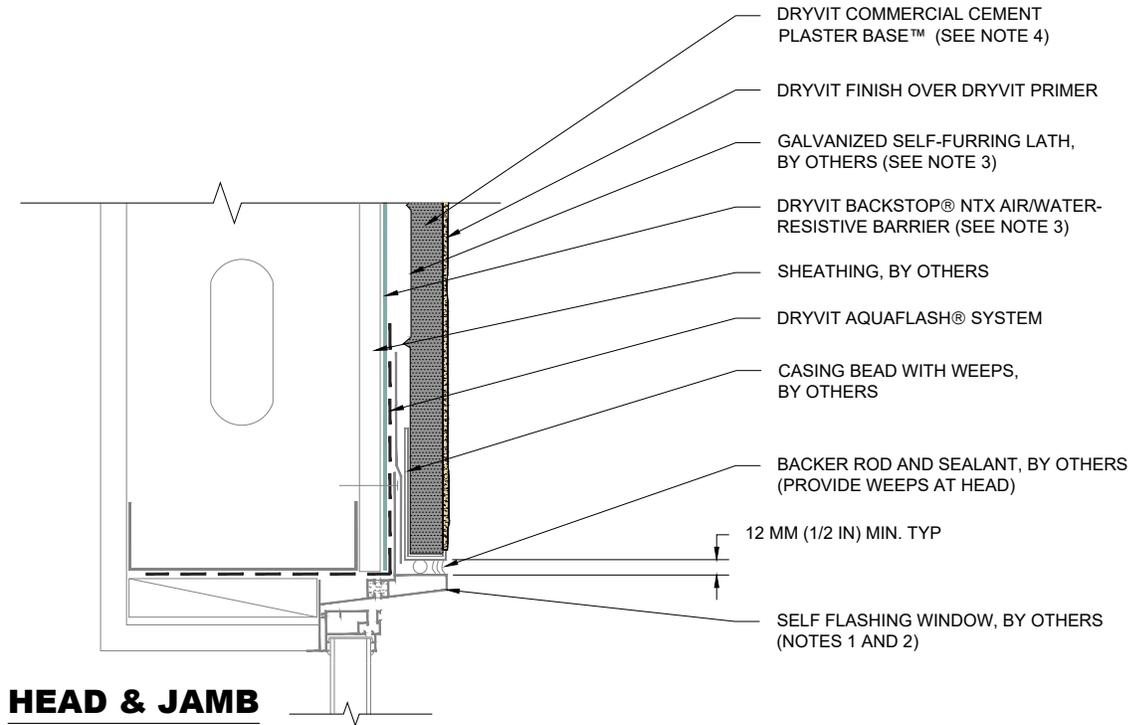

HEAD & JAMB

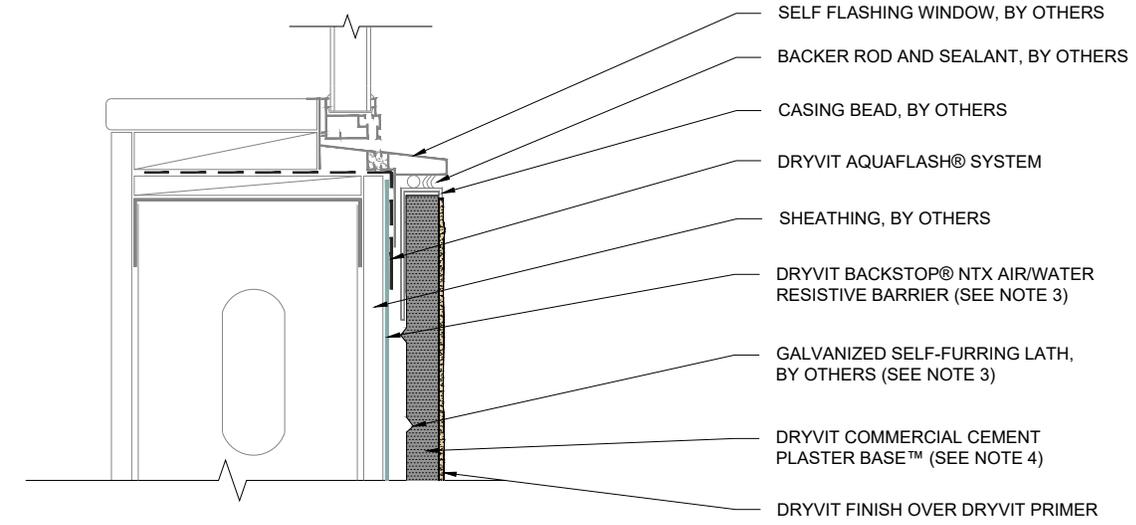

SILL


NOTE:

1. ALTERNATE DETAIL AT WINDOW HEAD WOULD INCLUDE METAL FLASHING WITH END DAMS.
2. ADDITIONAL FLASHING MAY BE REQUIRED FOR WINDOWS THAT ARE NOT SELF FLASHING.
3. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
4. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™

 Dryvit Technical Support: 800-556-7752	Detail: Termination at Self Flashing Nail-On Window				File Name:		 Construction Products Group
	Drawn by: KAB	Checked by: KK	Scale: NTS	Date: 1/2023	CCP-3 4		
www.tremcocpg.com							

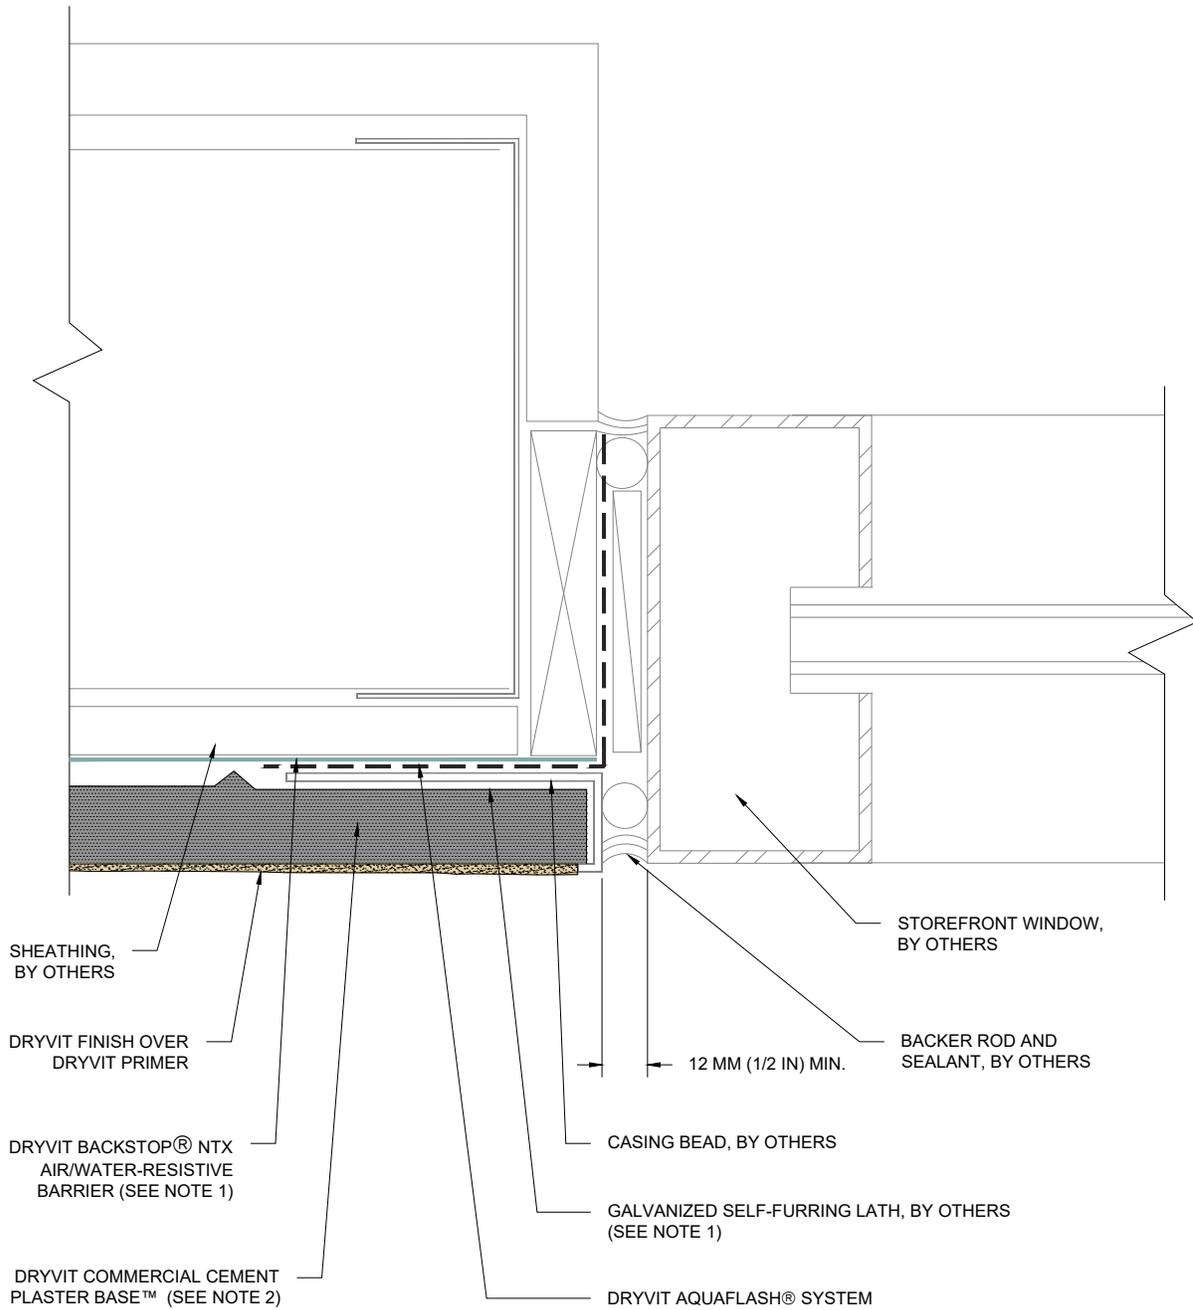


NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™

 Dryvit Technical Support: 800-556-7752	Detail: Termination at Storefront Window-Jamb				File Name:		 Construction Products Group
	Drawn by: KAB	Checked by: KK	Scale: NTS	Date: 1/2023	CCP-3 5		
www.tremcocpg.com							

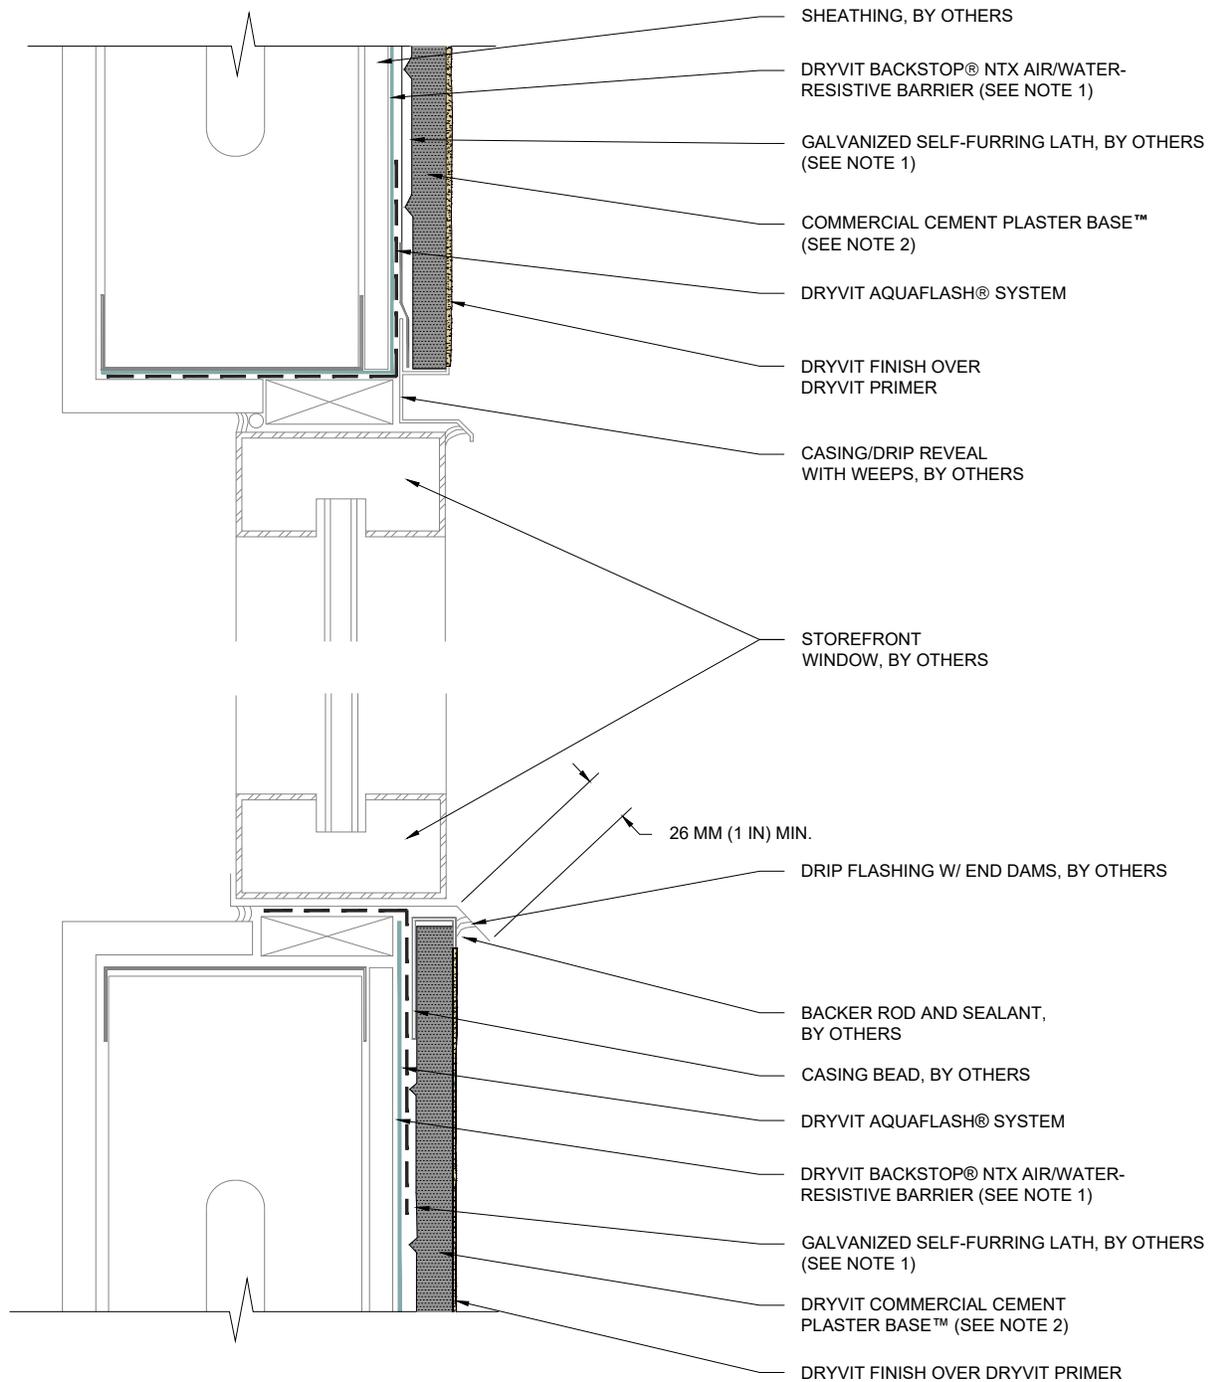

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Termination at Storefront Window-Head+Sill

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 6




Construction Products Group

www.tremcocpg.com

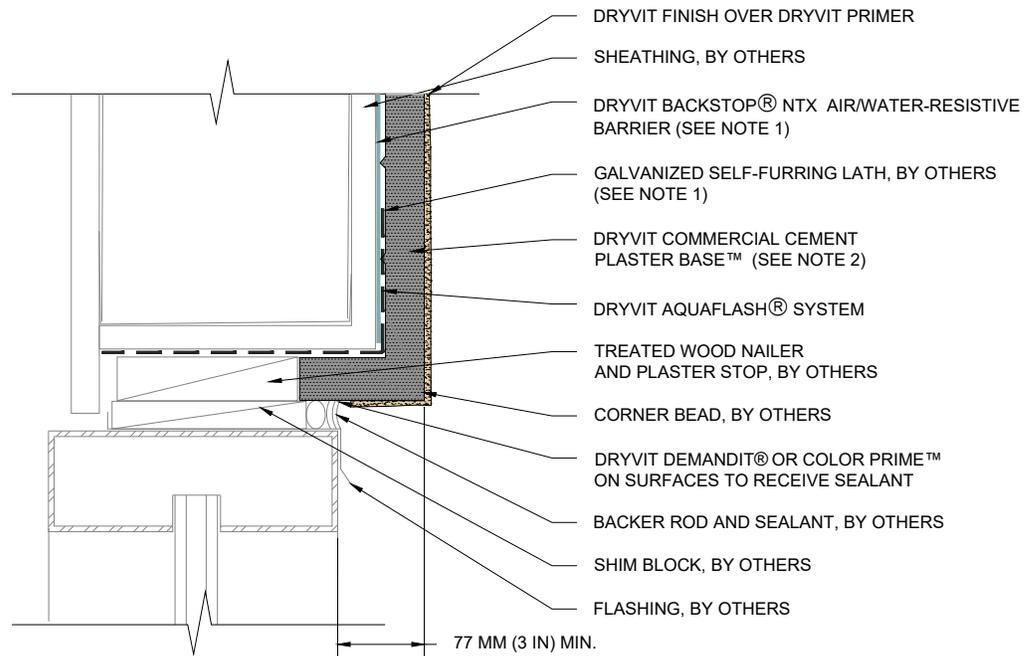


HEAD & JAMB

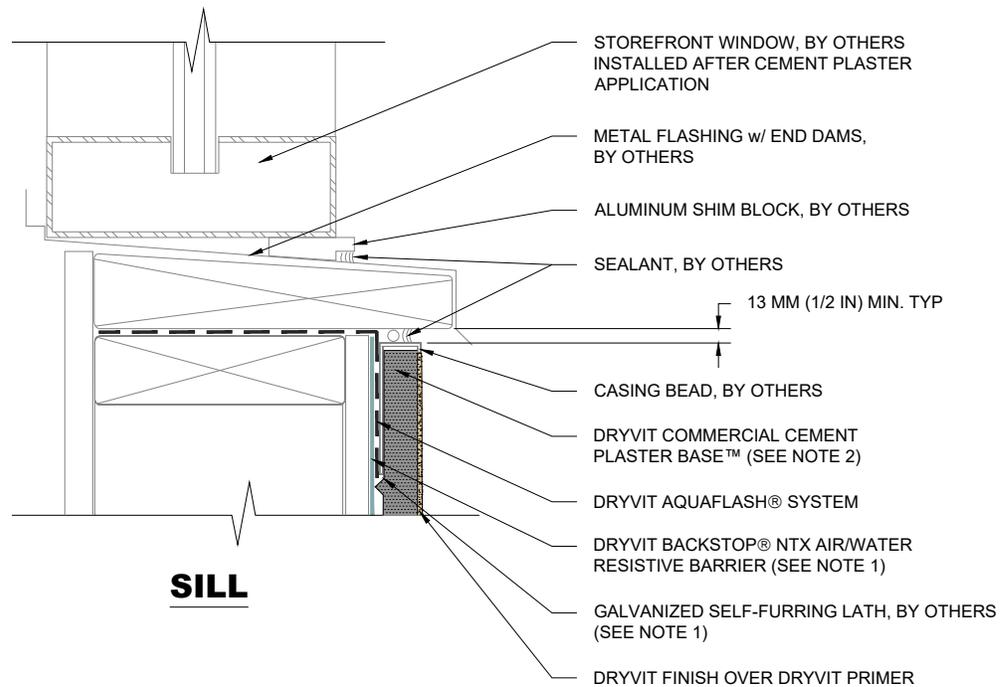

SILL

SEE SILL
DETAIL

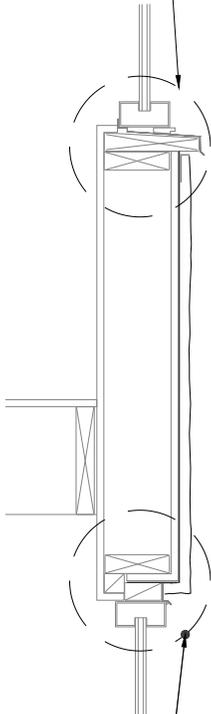

SEE HEAD
DETAIL

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Termination at Storefront Window Setback

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 7




Construction Products Group

www.tremcocpg.com

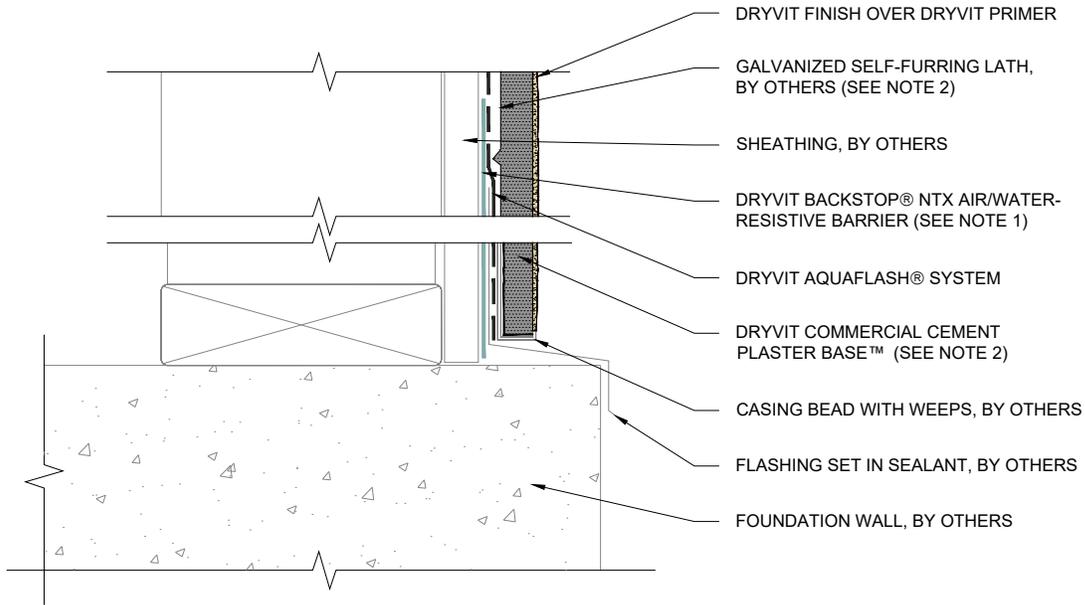

CASING BEAD AT CONCRETE FOUNDATION

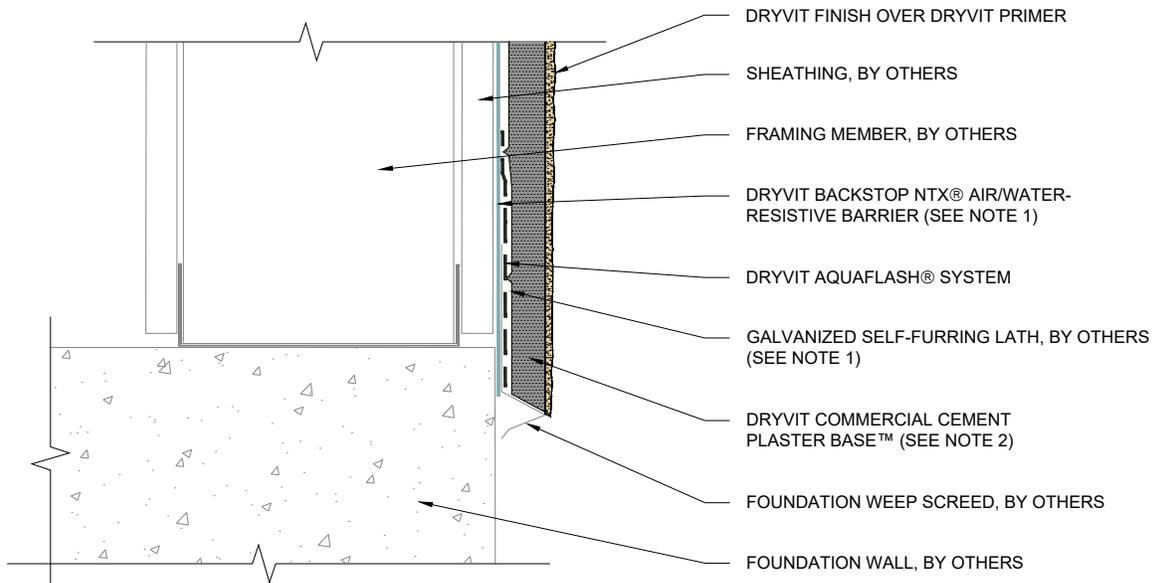

WEEP SCREED AT CONCRETE FOUNDATION

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Termination at Concrete Foundation

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 8



Construction Products Group

www.tremcocpg.com

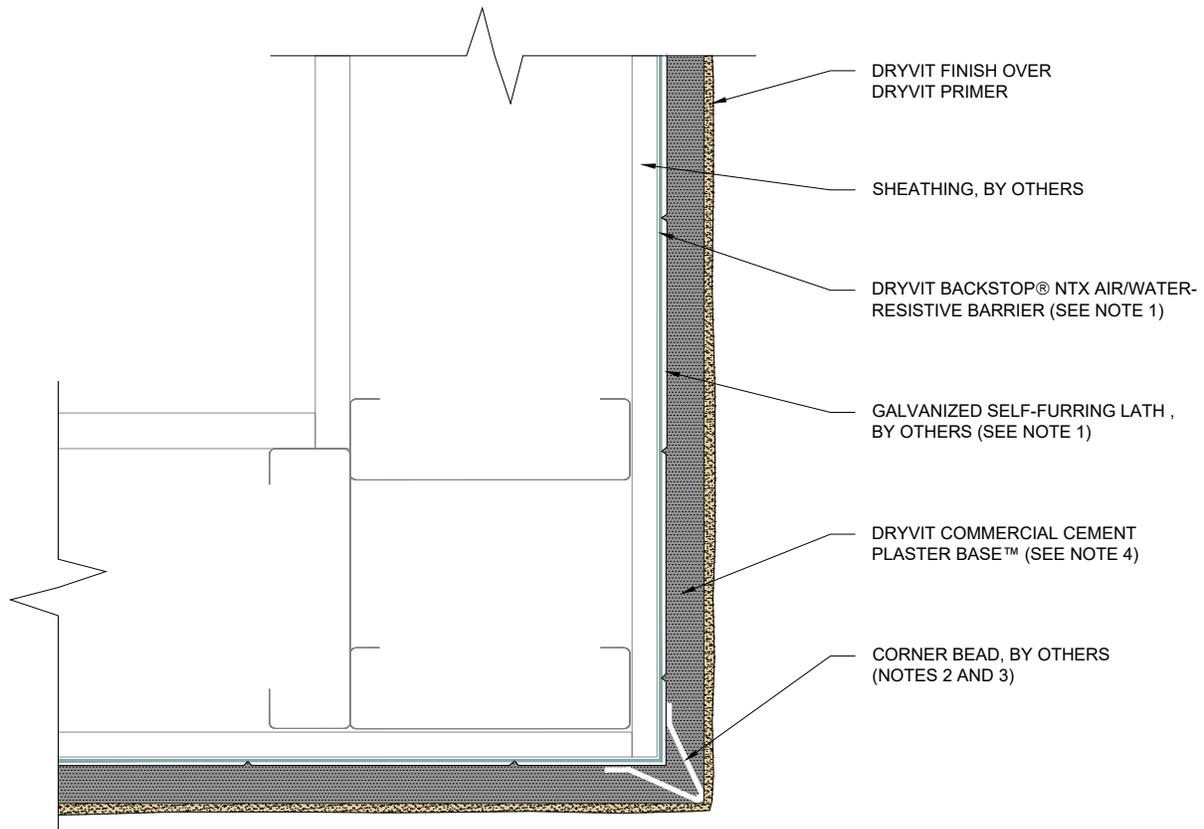



NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. WELDED WIRE, PLASTIC NOSE, OR PVC CORNER TRIM MAY BE USED.
3. FILL SPACE SOLID WITH PLASTER BASE.
4. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™

 Dryvit Technical Support: 800-556-7752	Detail: Outside Corner				File Name:		 Construction Products Group
	Drawn by: KAB	Checked by: KK	Scale: NTS	Date: 1/2023	CCP-3 9		
www.tremcocpg.com							

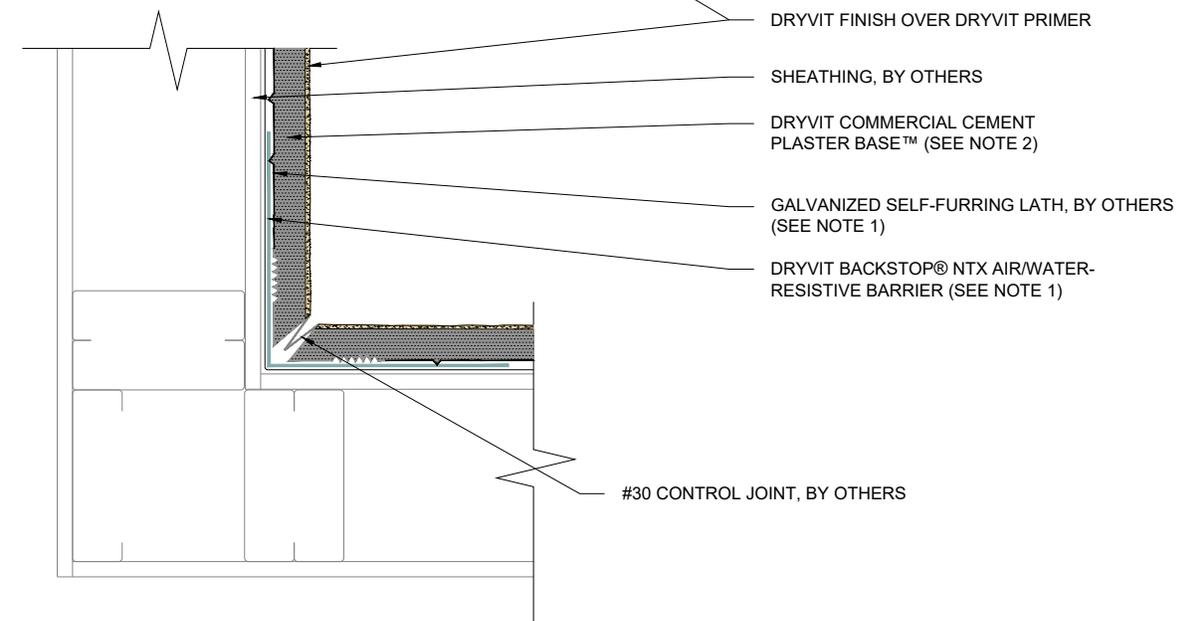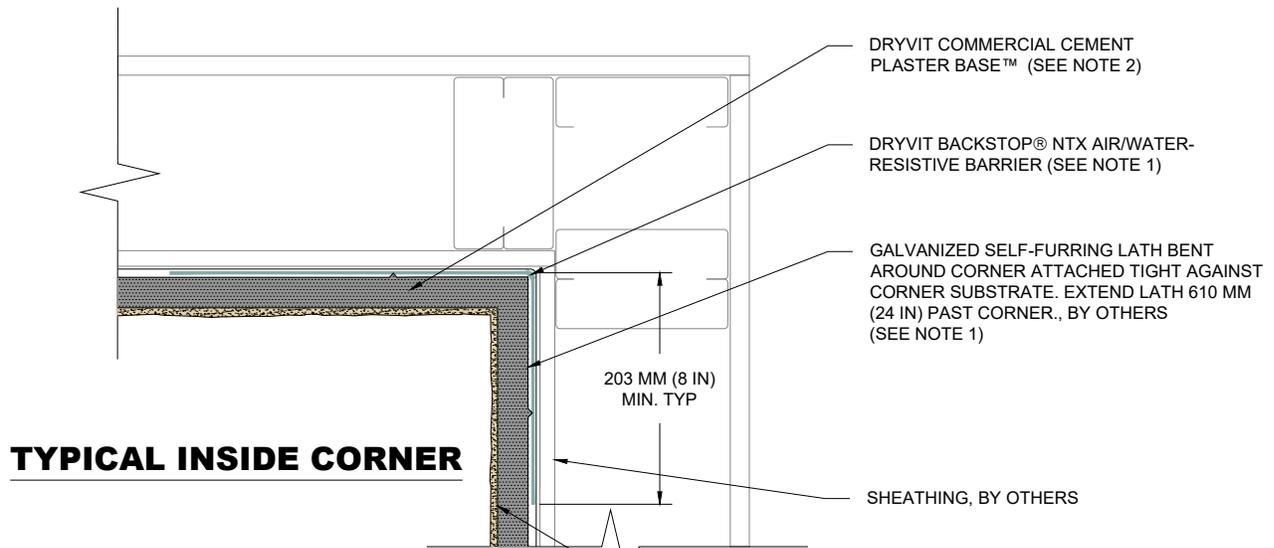

NOTE:

- BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
- OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Inside Corner Detail

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 10



Construction Products Group

www.tremcocpg.com

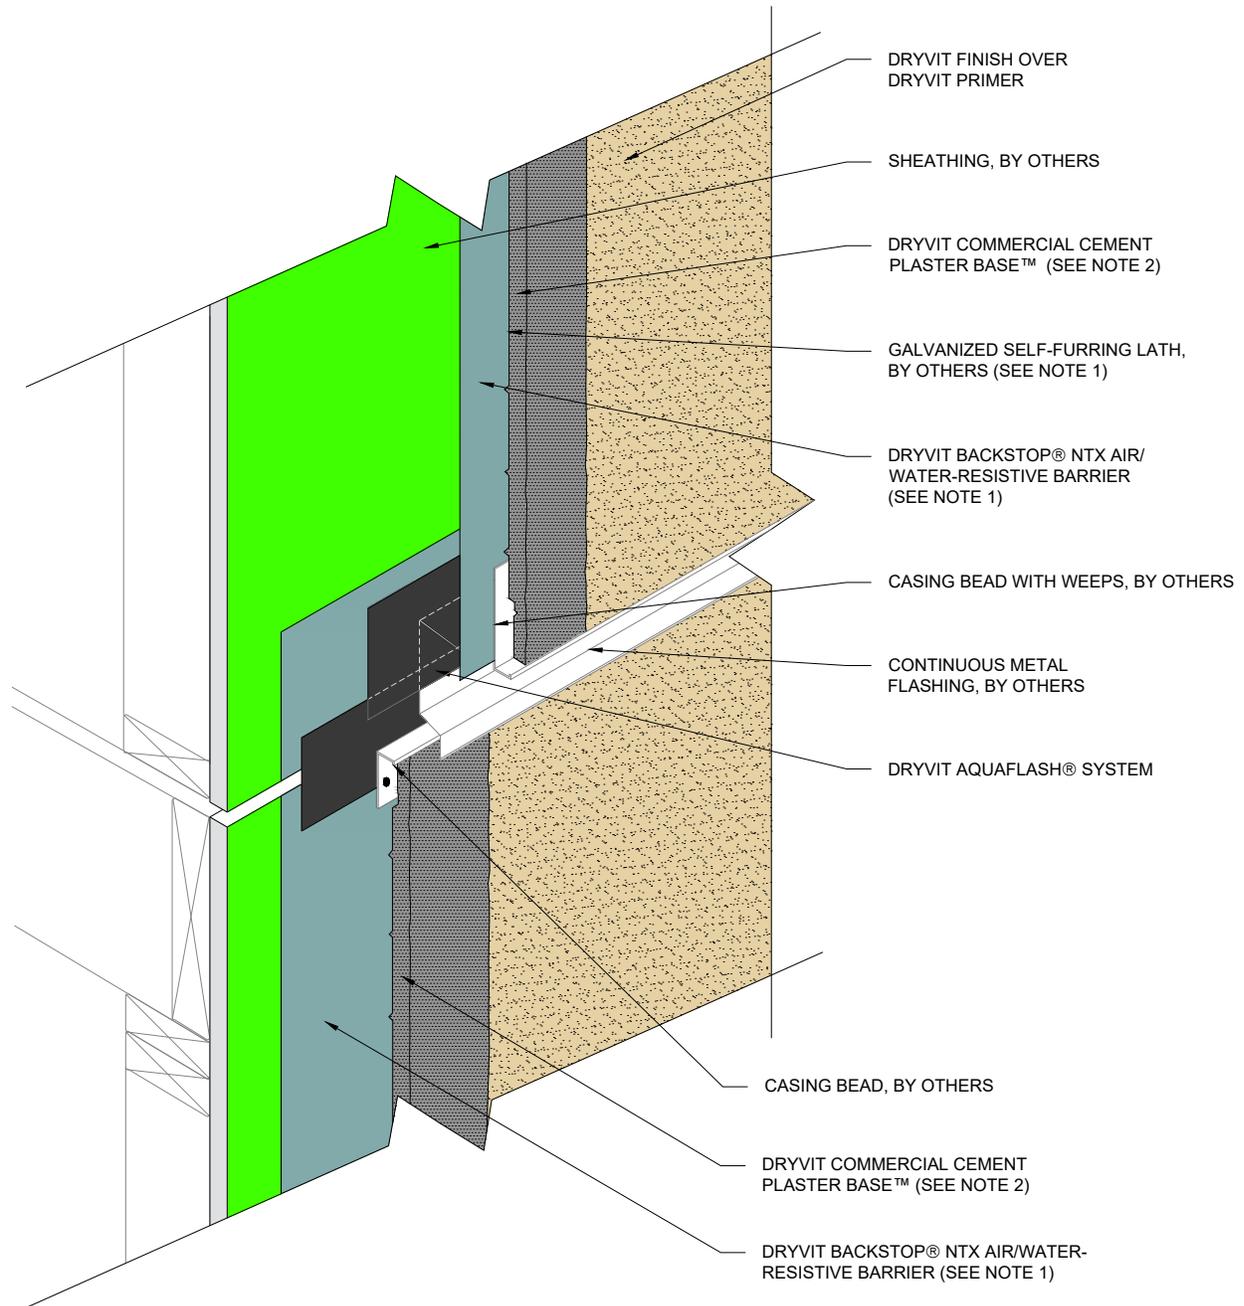

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Horizontal Flashing & Expansion Joint

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 11



Construction Products Group

www.tremcocpg.com

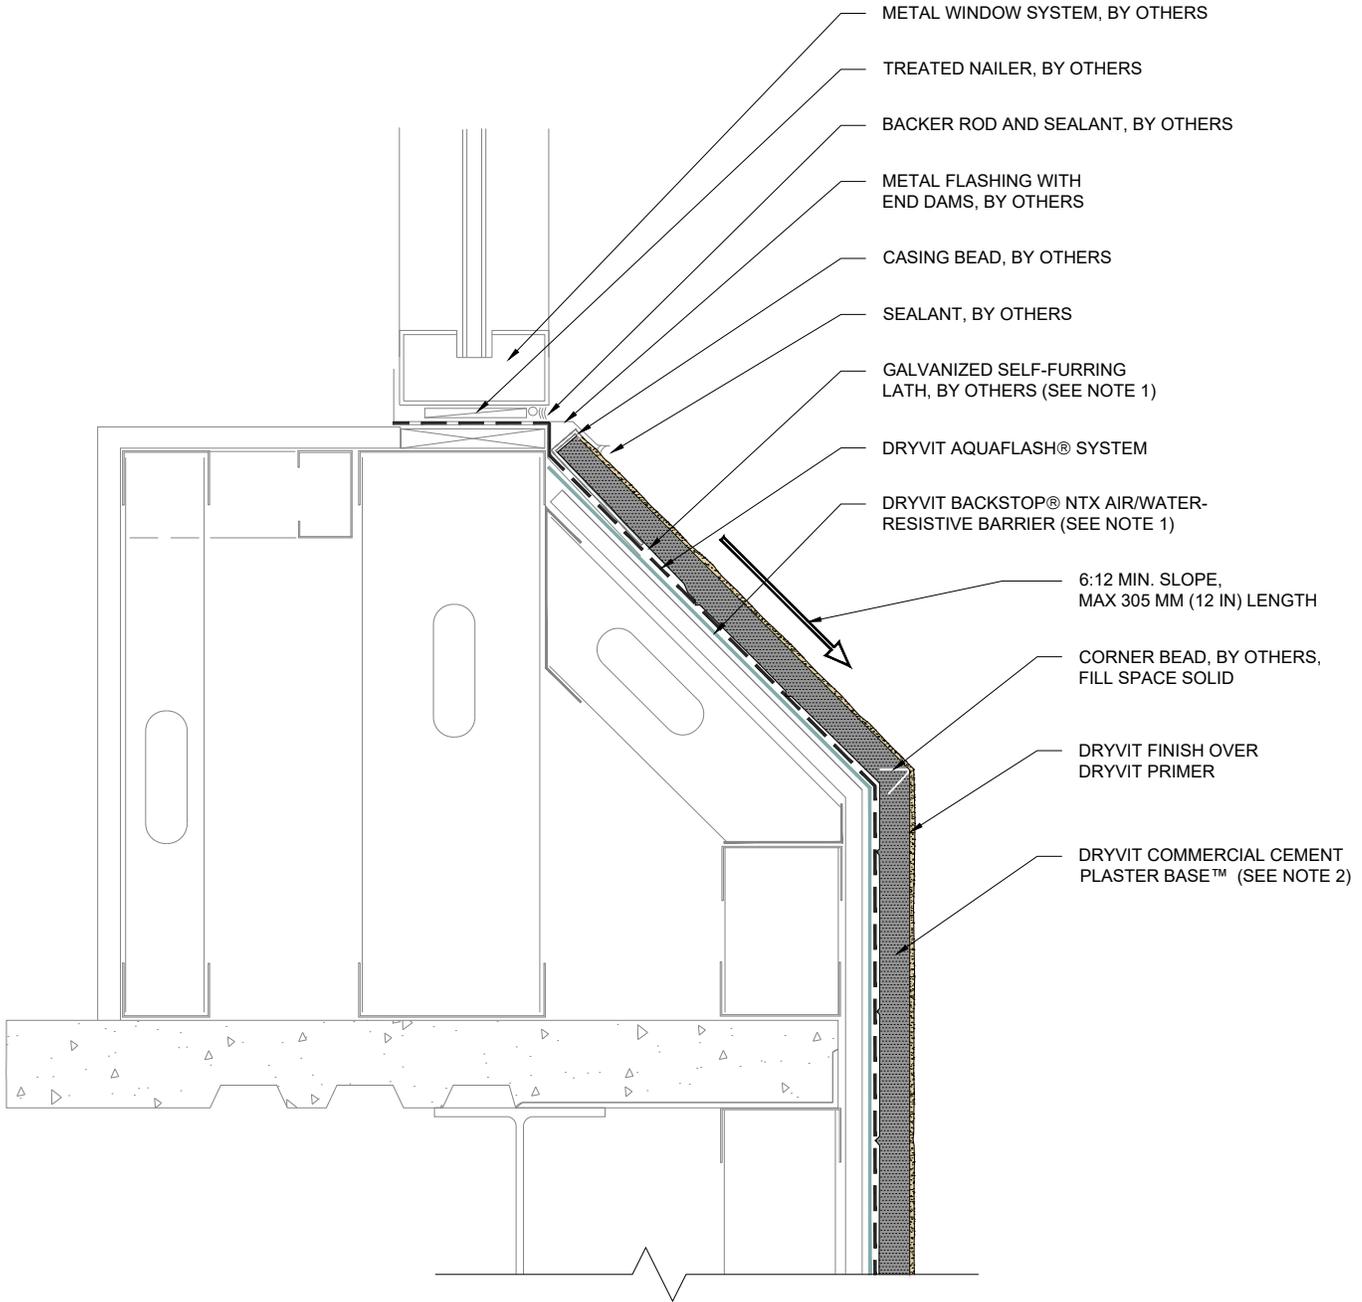


NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™

 Dryvit Technical Support: 800-556-7752	Detail: Sloped Sill				File Name:		 TREMCO Construction Products Group
	Drawn by: KAB	Checked by: KK	Scale: NTS	Date: 1/2023	CCP-3 12		
www.tremcocpg.com							

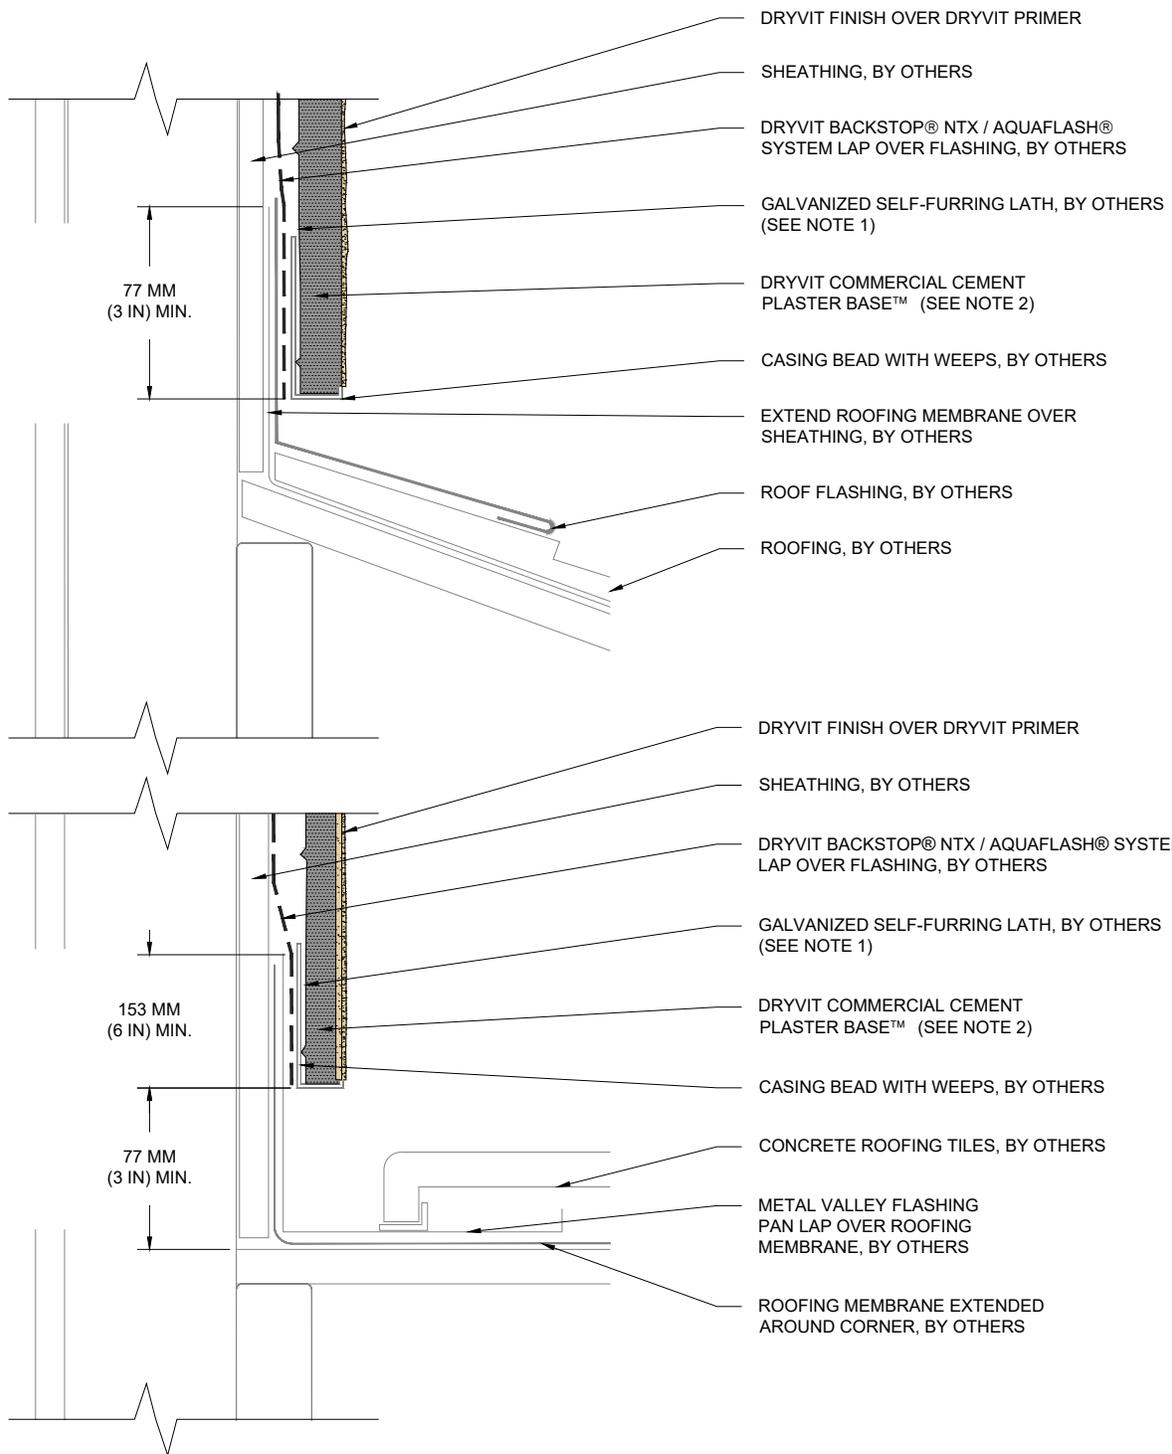


NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™

 Dryvit Technical Support: 800-556-7752	Detail: Termination at Roof				File Name:		 TREMCO Construction Products Group
	Drawn by: KAB	Checked by: KK	Scale: NTS	Date: 1/2023	CCP-3 13		
www.tremcocpg.com							

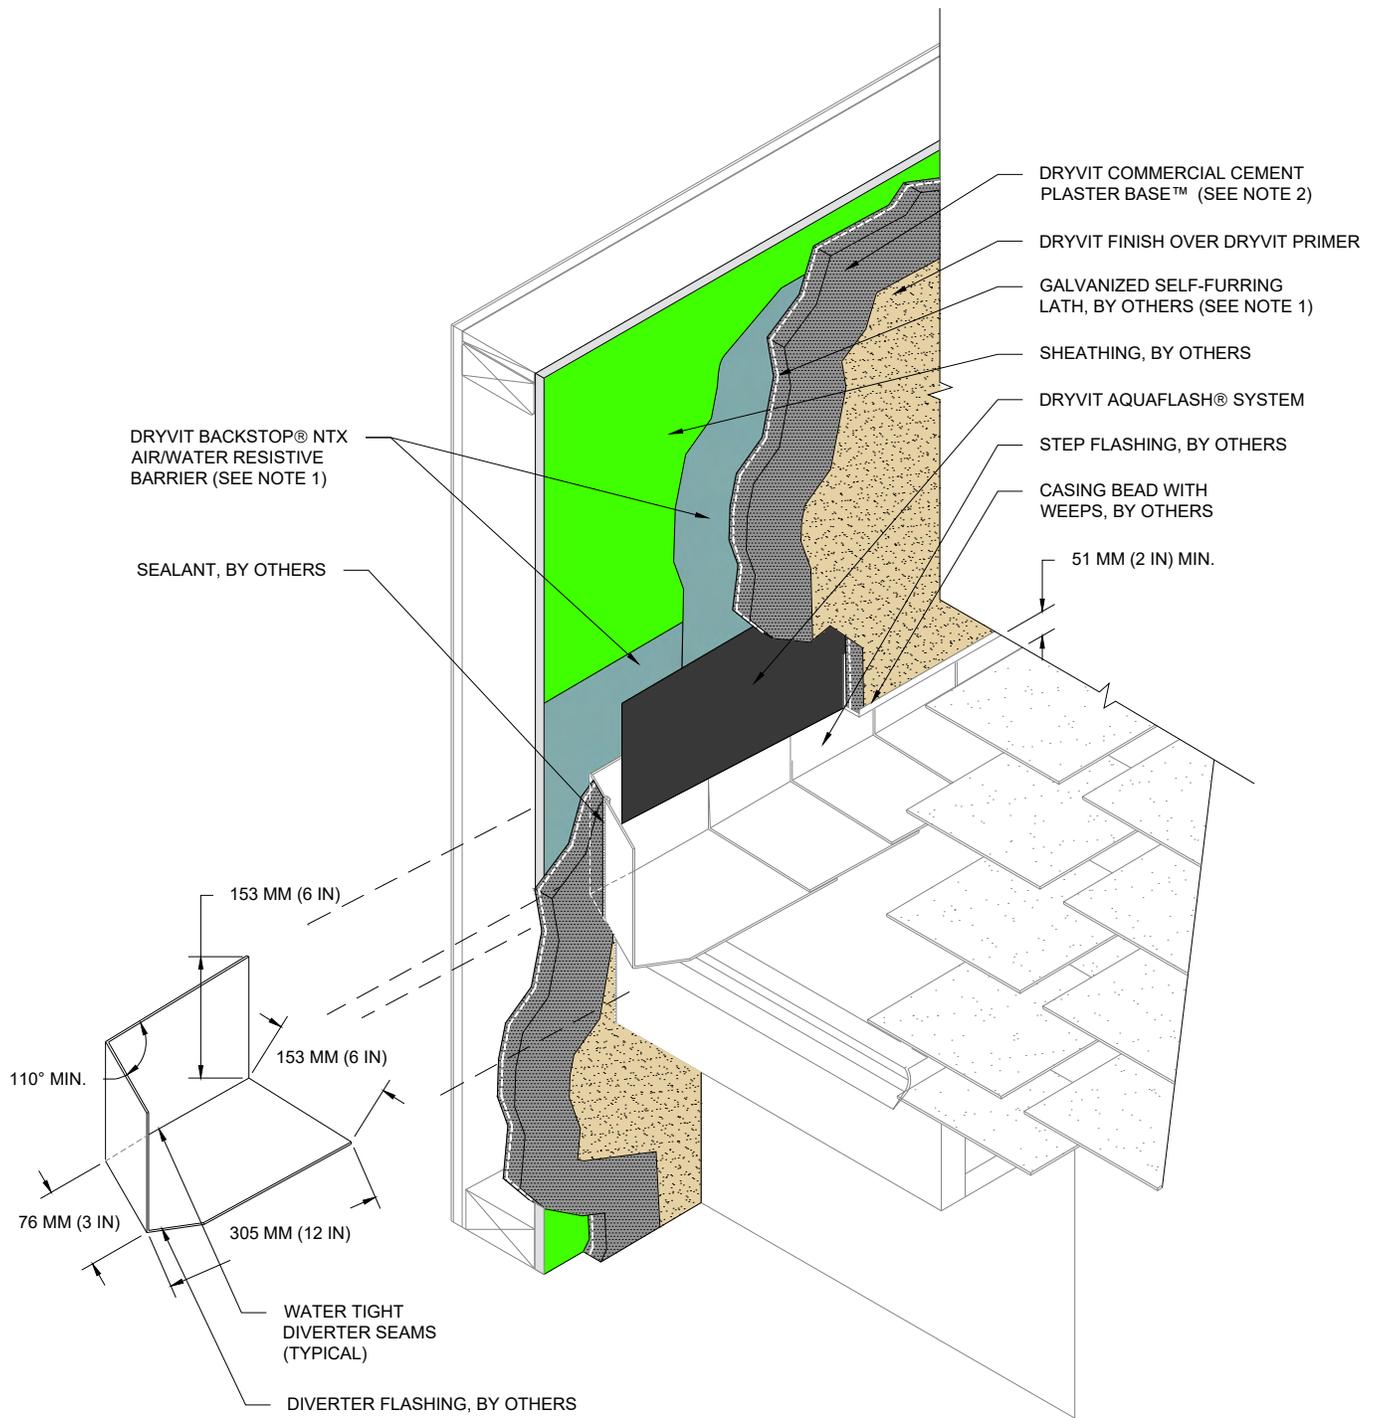


- NOTE:
1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
 2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™

 Dryvit Technical Support: 800-556-7752	Detail: Termination at Roof/Wall Intersection				File Name:		 Construction Products Group
	Drawn by: KAB	Checked by: KK	Scale: NTS	Date: 1/2023	CCP-3 14		
www.tremcocpg.com							

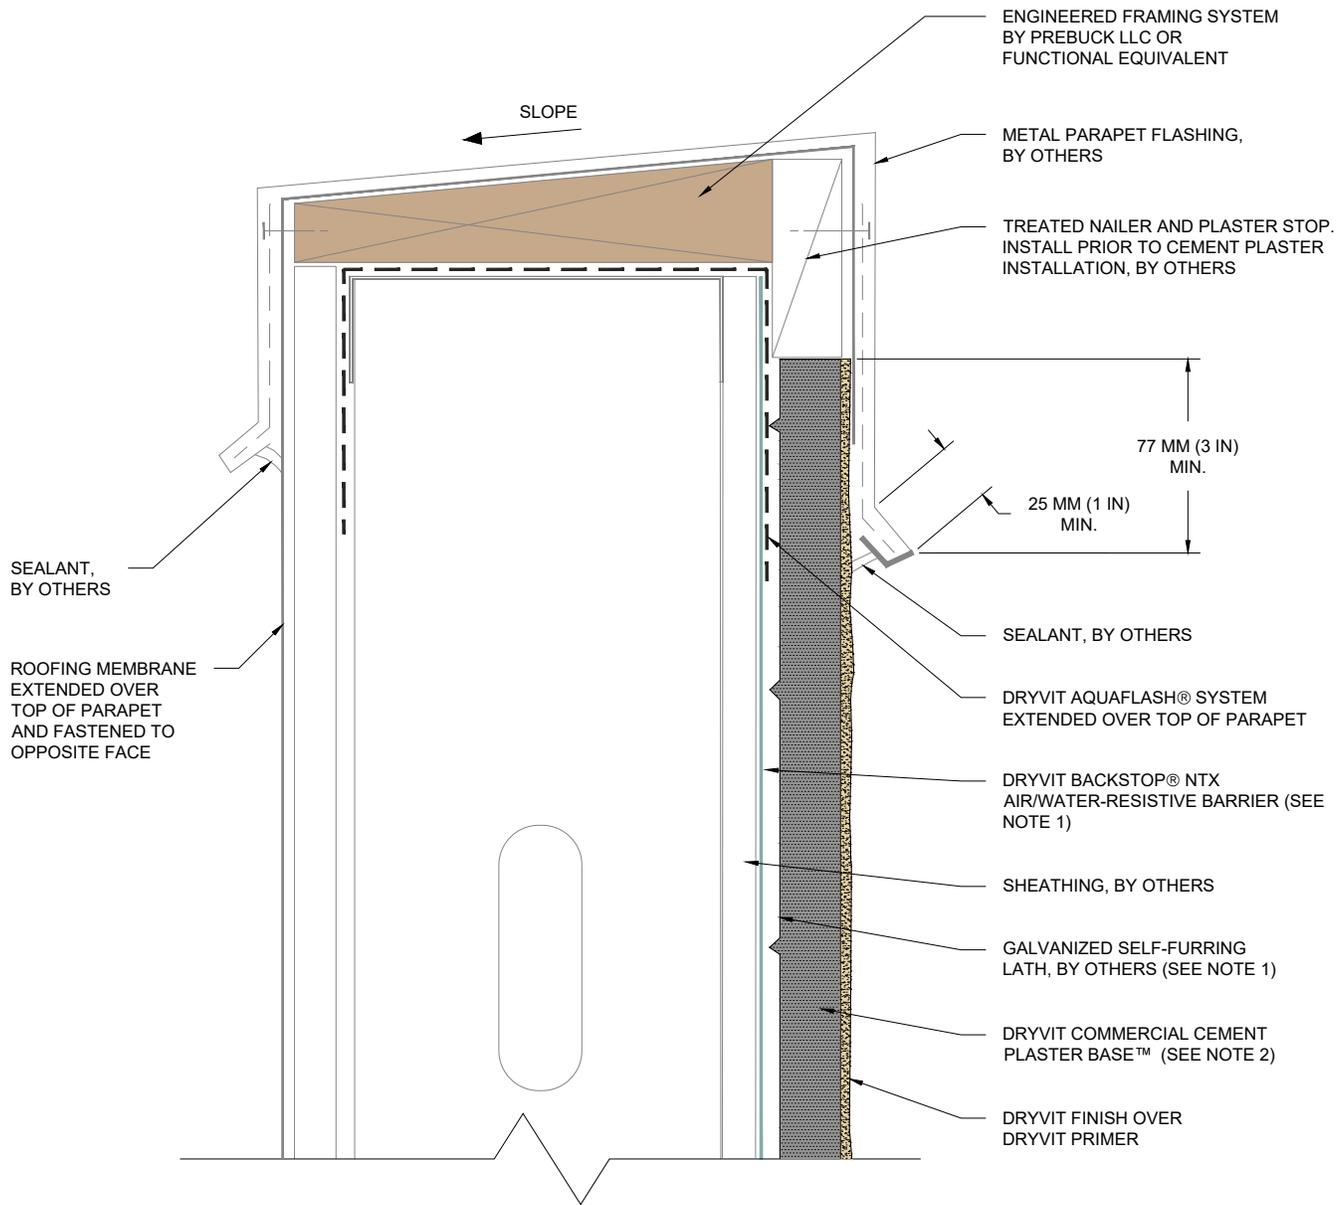

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Parapet Flashing

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 15



Construction Products Group

www.tremcocpg.com

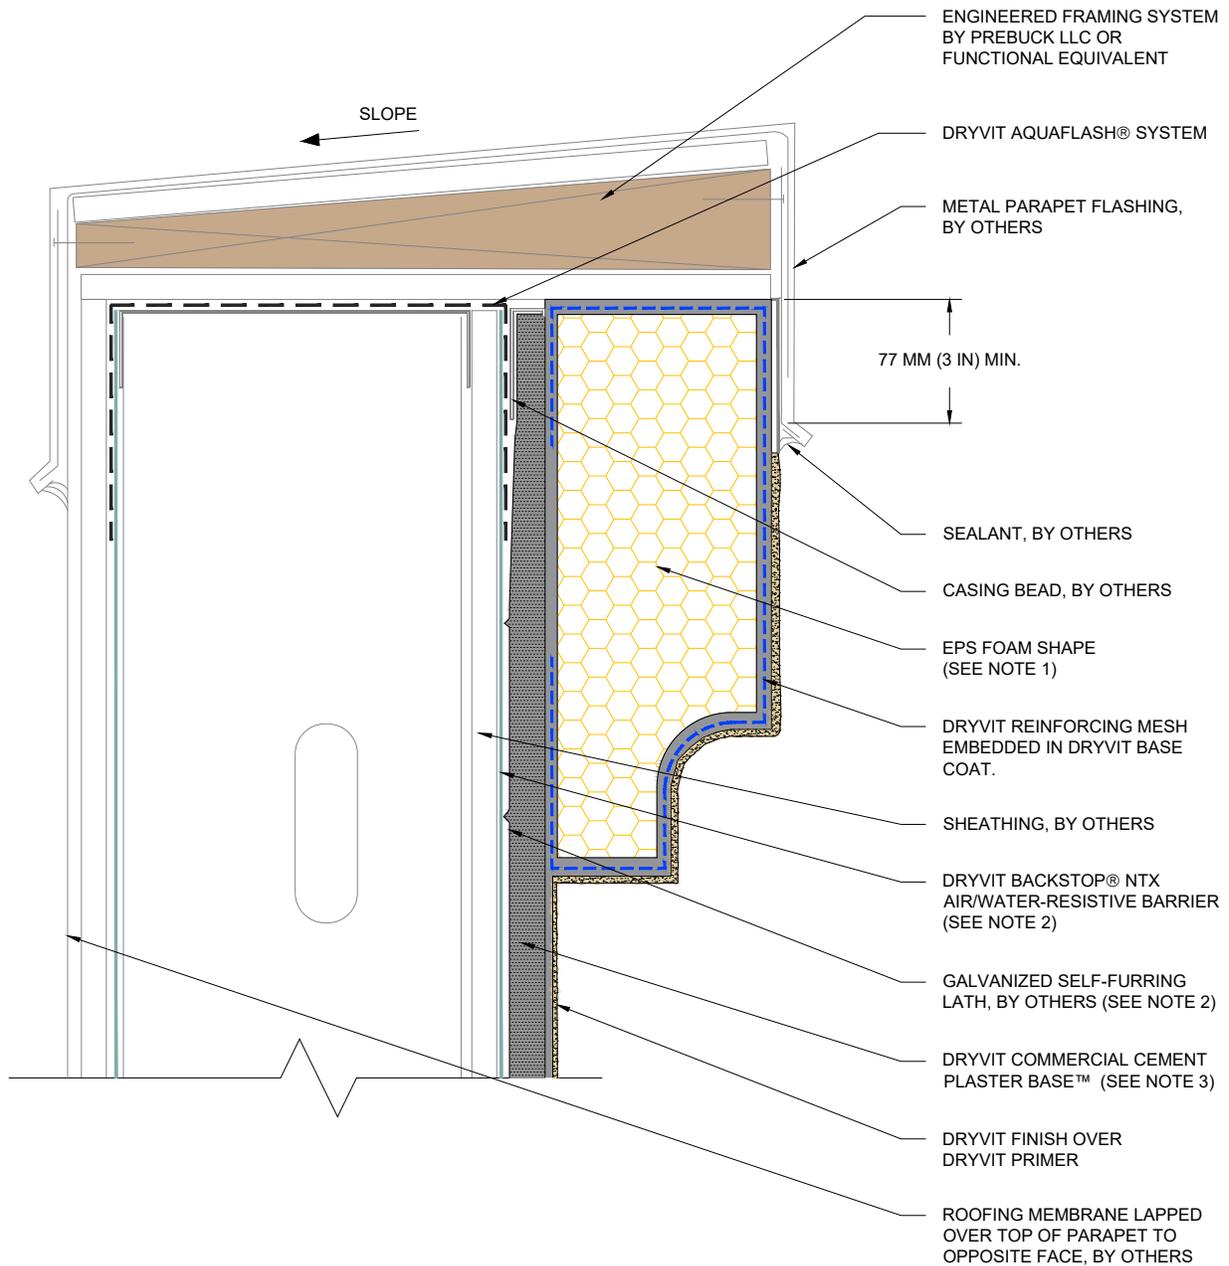

NOTE:

1. ADHESIVELY ATTACH EPS SHAPE TO CEMENT PLASTER BASE COAT WITH GENESIS® OR GENESIS® DM BASE COAT.
2. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
3. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: EPS Cornice

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 3/2023


File Name:

CCP-3 16



Construction Products Group

www.tremcocpg.com

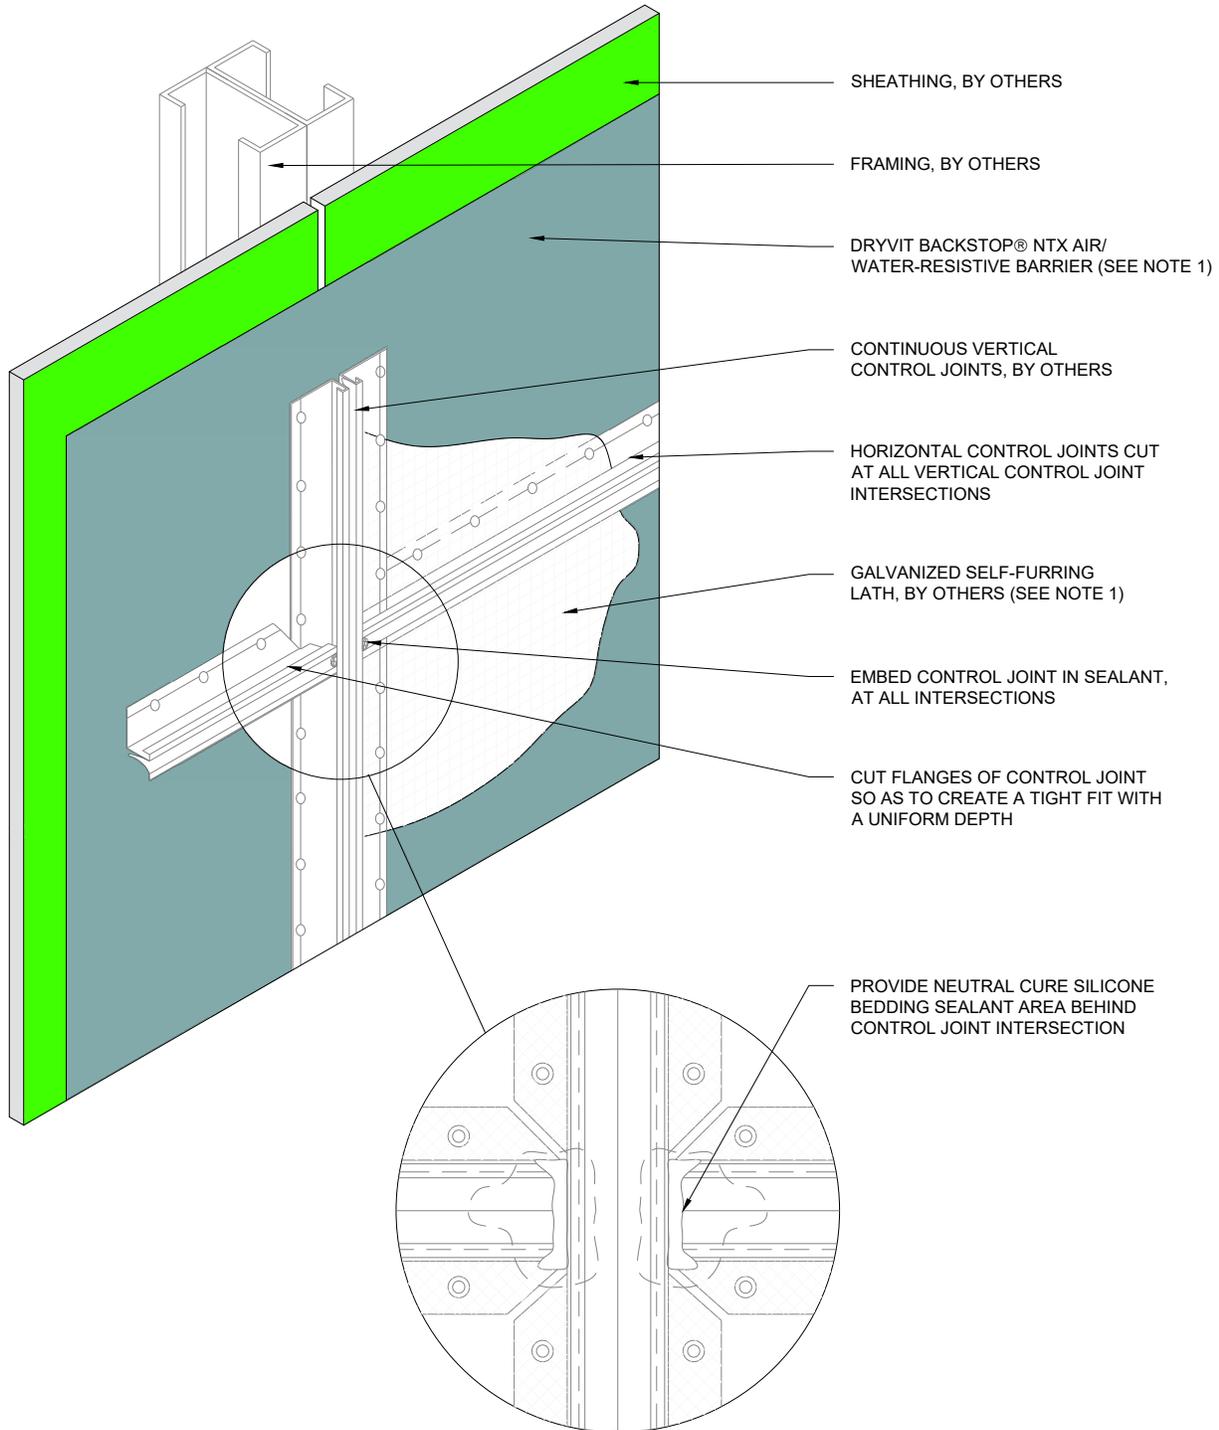

NOTE:

- BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™



Dryvit Technical Support: 800-556-7752

Detail: Control Joint Intersection

Drawn by: KAB

Checked by: KK

Scale: NTS

Date: 1/2023


File Name:

CCP-3 17



Construction Products Group

www.tremcocpg.com

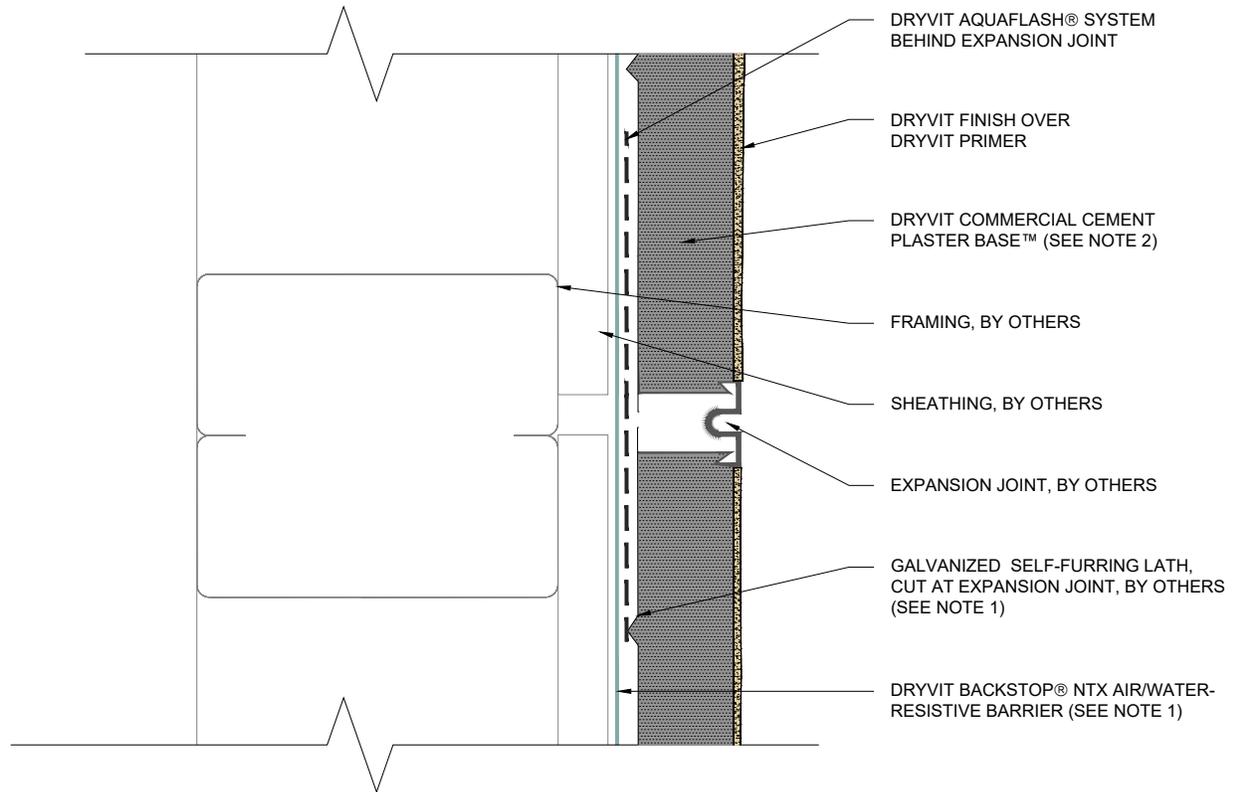

NOTE:

1. BACKSTOP® NTX AIR/WATER-RESISTIVE BARRIER REQUIRES USE OF A SLIP SHEET LAYER SUCH AS #15 FELT OR PAPER BACKED LATH.
2. OTHER APPROVED SCRATCH AND BROWN COATS MAY BE ACCEPTABLE. CONSULT DRYVIT FOR SPECIFICS.

The architecture, engineering, and design of the project using the Dryvit products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit to ensure you have the most recent version.

Commercial Cement Plaster 3™

 Dryvit Technical Support: 800-556-7752	Detail: Horizontal or Vertical One-Piece Expansion Joint				File Name:		 Construction Products Group
	Drawn by: KAB	Checked by: KK	Scale: NTS	Date: 1/2023	CCP-3 18		
www.tremcocpg.com							