

## Fedderlite® Panel System Installation Details

# Table of Contents

## Detail

FEDDERLITE CHANNEL AND MOUNTING PLATE	FL - 01
PANEL SYSTEM	FL - 02
PANEL SYSTEM - HIGH IMPACT OPTION	FL - 03
PANEL VERTICAL JOINT -	FL - 04
STAGGERED CHANNEL OPTION	
BACK VIEW - STAGGERED CHANNEL OPTION	FL - 05
PANEL VERTICAL JOINT - ALIGNED CHANNEL	FL - 06
WITH MOUNTING PLATE OPTION	
BACK VIEW - ALIGNED CHANNEL WITH	FL - 07
MOUNTING PLATE OPTION	
PANEL VERTICAL JOINT - BACK FASTENED	FL - 08
METHOD	
BACK VIEW - BACK FASTENED METHOD	FL - 09
ADHESIVE ATTACHMENT METHODS	FL - 10
FOR PANELS LESS THAN 4'-0" WIDE	
ADHESIVE ATTACHMENT METHODS	FL - 11
FOR PANELS GREATER THAN 4'-0" WIDE	
FASTENING METHODS - FIELD OF PANEL	FL - 12
HORIZONTAL SHIPLAP JOINT WITH DRAINAGE	FL - 13
HORIZONTAL JOINT WITH DRAINAGE	FL - 14
HORIZONTAL SHIPLAP JOINT	FL - 15
HORIZONTAL JOINT	FL - 16
PARAPET	FL - 17
FOUNDATION AT GRADE - FLUSH SUBSTRATE	FL - 18
FOUNDATION AT GRADE - RECESSED SUBSTRATE	FL - 19
HEAD	FL - 20
JAMB	FL - 21
SILL	FL - 22
TRANSITION AT FASCIA/SOFFIT	FL - 23
INTERSECTION - INSULATED	
TRANSITION AT FASCIA/SOFFIT	FL - 24
INTERSECTION - UNINSULATED	
TYPICAL AESTHETIC REVEALS	FL - 25
TERMINATION AT DISSIMILAR MATERIALS	FL - 26
INSIDE CORNER JOINT	FL - 27
OUTSIDE CORNER JOINT	FL - 28
INSIDE CORNER PANEL	FL - 29
OUTSIDE CORNER PANEL	FL - 30
FACE FASTENING TO SOLID SUBSTRATE	FL - 31

### NOTE:

DRYVIT MAKES NO REPRESENTATION REGARDING CONFORMITY OF ITS SUGGESTIONS TO MODEL BUILDING CODES, ENGINEERING CRITERIA, SPECIFIC APPLICATIONS, OR PROJECT LOCATIONS. ALL COMPONENTS INDICATED IN ILLUSTRATIONS, AS WELL AS OTHERS THAT MAY BE REQUIRED FOR THE INTEGRITY OF THE SYSTEM SHALL BE DESIGNED, DETAILED, AND ENGINEERED BY REPRESENTATIVES OF THE ARCHITECT, OWNER, OR CONTRACTOR TO BE IN CONFORMANCE WITH MODEL CODES, ARCHITECTURAL, AND ENGINEERING REQUIREMENTS PERTAINING TO SPECIFIC BUILDING PROJECTS.

DRYVIT MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE ARCHITECTURAL DESIGN, ENGINEERING, OR WORKMANSHIP OF PROJECTS UTILIZING DRYVIT SYSTEMS OR PRODUCTS.

THE LIABILITIES OF DRYVIT SHALL BE AS STATED IN THE DRYVIT STANDARD WARRANTY. CONTACT DRYVIT FOR A FULL AND COMPLETE COPY OF THE WARRANTY.

The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.

### Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Fedderlite® Panel System Installation Details

Drawn by: HDE

Checked by:

Scale: NTS

Date: 10/2022

File Name:


Table of Contents





Construction Products Group

[www.tremcocpg.com](http://www.tremcocpg.com)

**ALUMINUM**

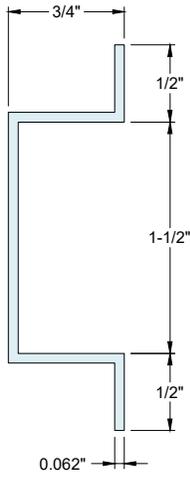


**STEEL**

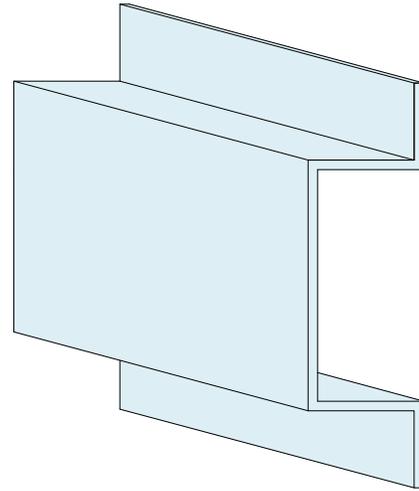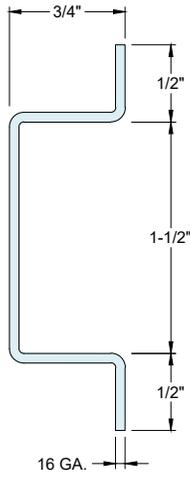

**FEDDERLITE CHANNEL SECTION VIEW**

**FEDDERLITE CHANNEL ISOMETRIC VIEW**

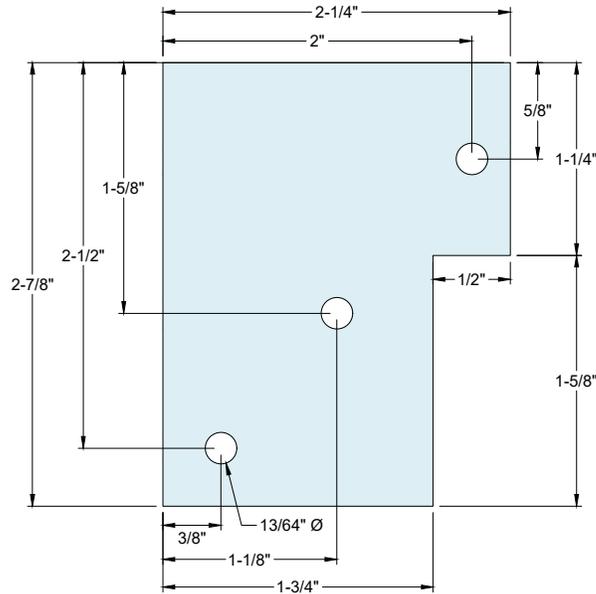

**MOUNTING PLATE OPTION (SEE NOTE 1)**

**NOTES:**

1. MOUNTING PLATE OPTION ELIMINATES THE NEED TO STAGGER THE FEDDERLITE CHANNELS. SEE DETAILS FL-06 AND FL-07.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Fedderlite® Channel and Mounting Plate

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-01



Construction Products Group

www.tremcocpg.com

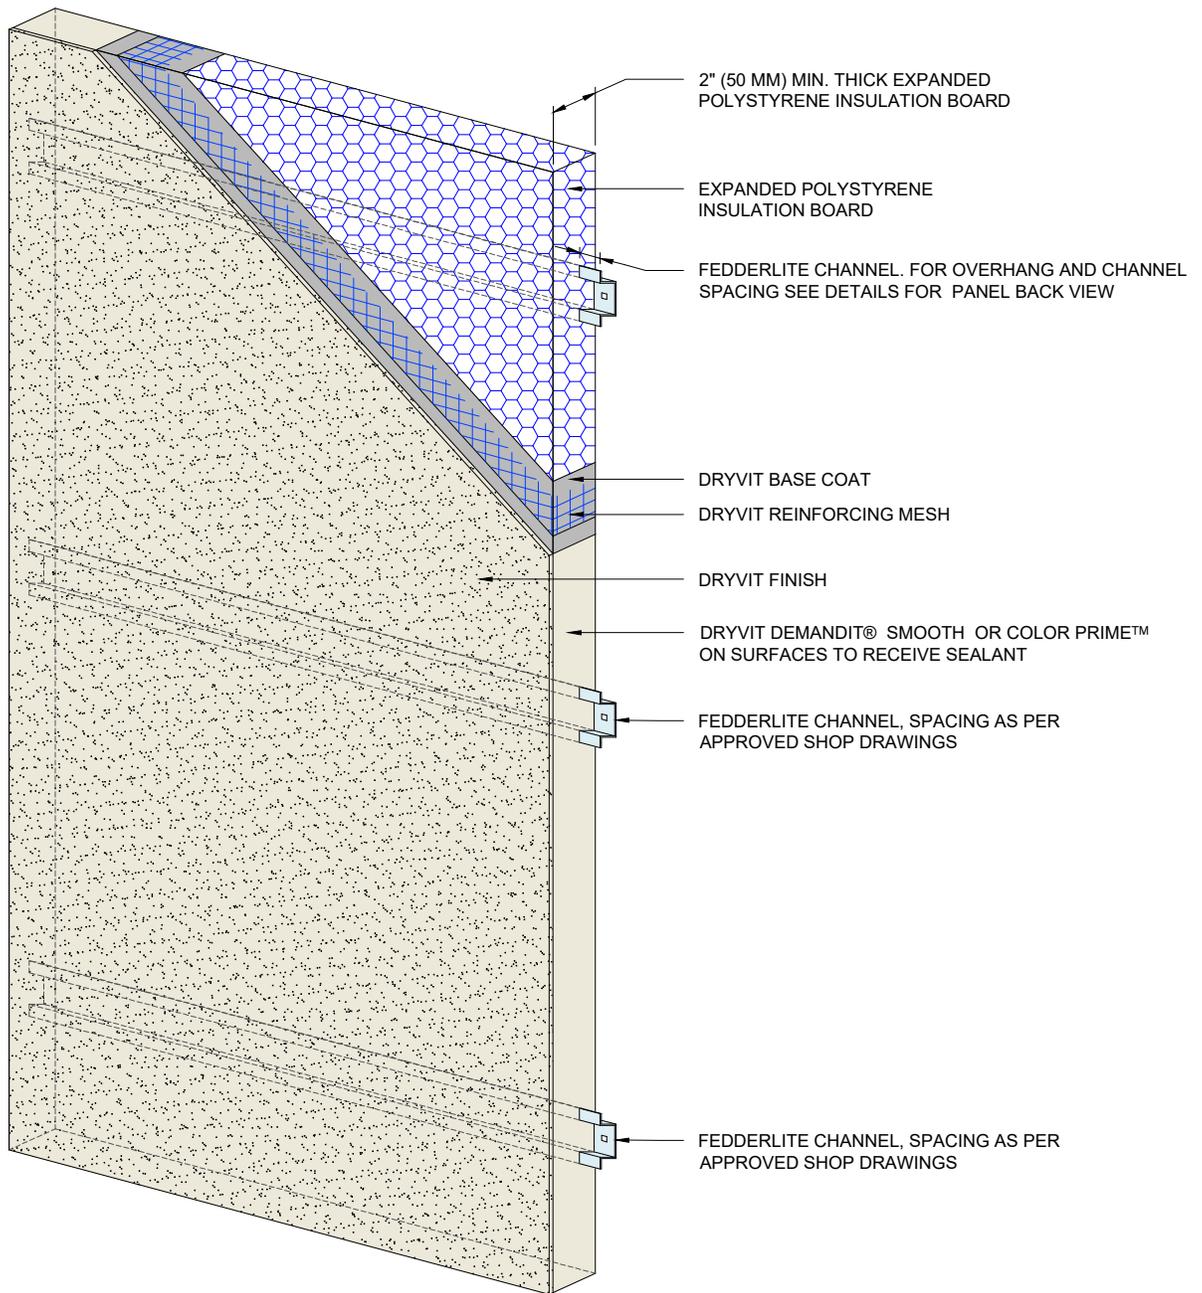

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Panel System

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-02



Construction Products Group

www.tremcocpg.com

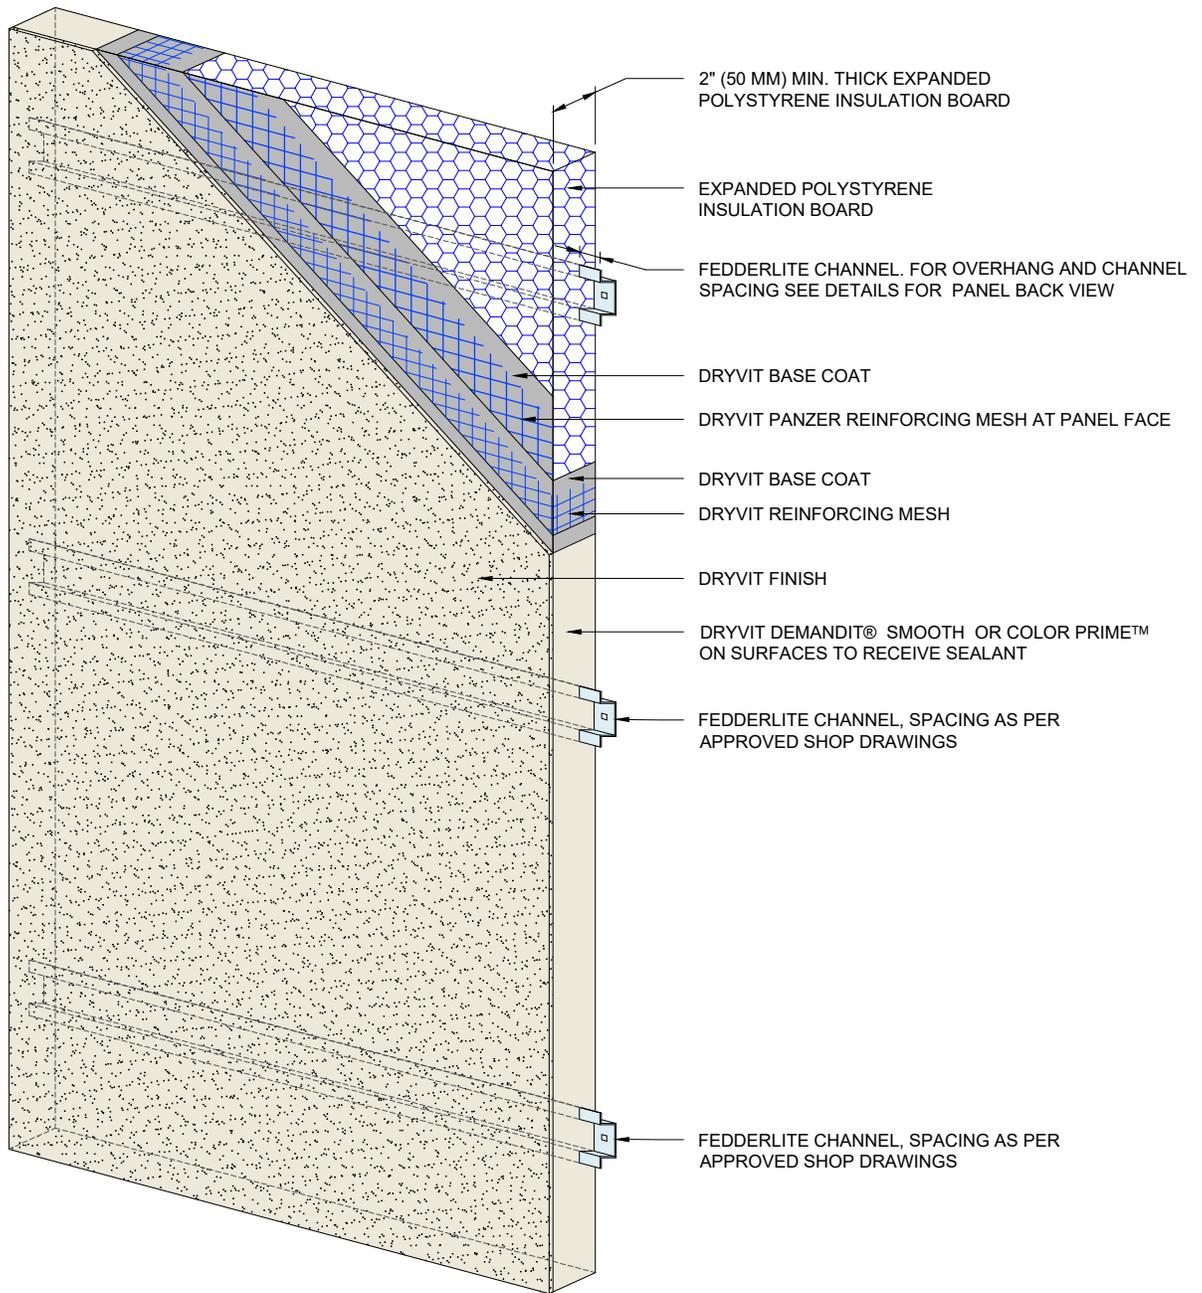

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Panel System - High Impact Option

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-03




Construction Products Group


www.tremcocpg.com

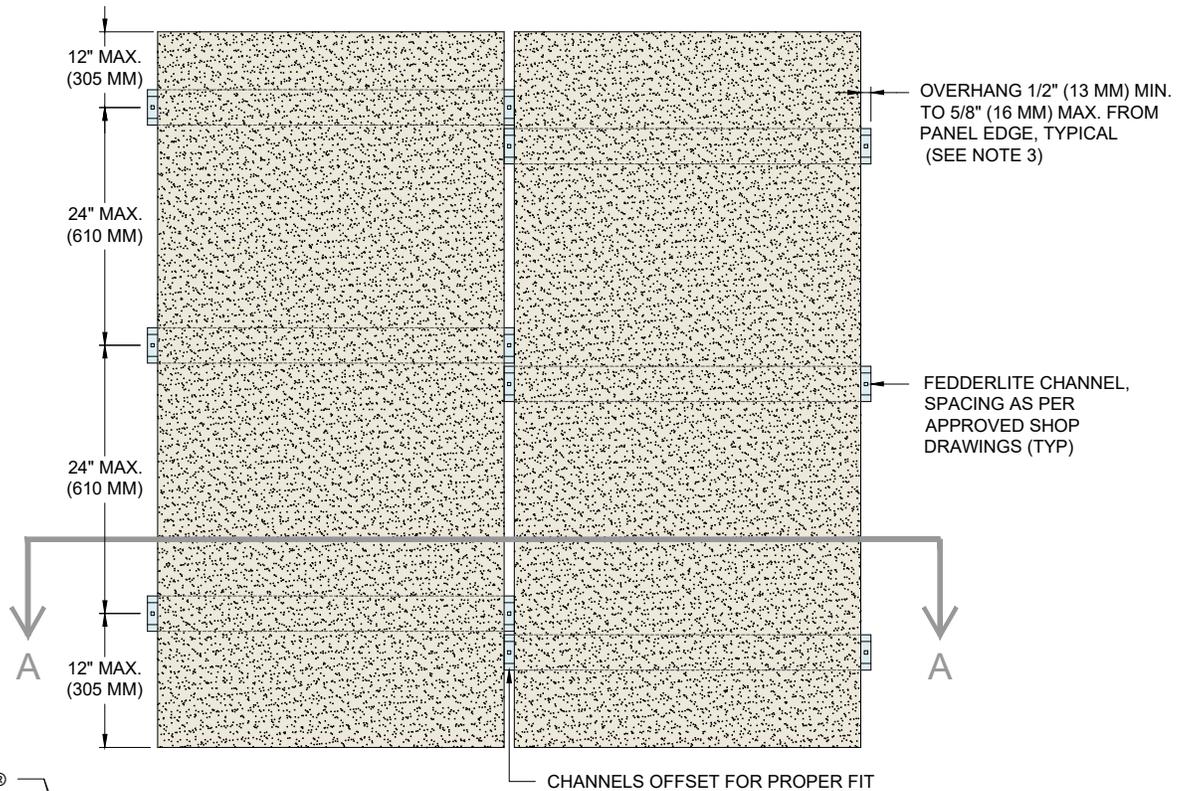

DRYVIT DEMANDIT® SMOOTH OR COLOR PRIME™ ON SURFACES TO RECEIVE SEALANT

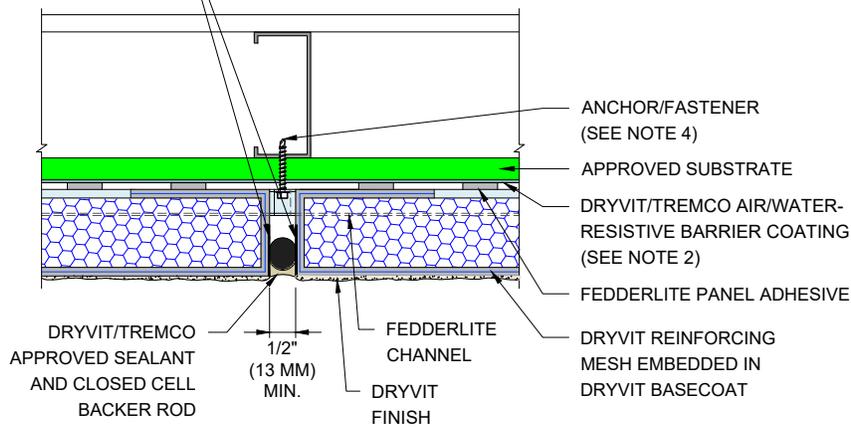

**SECTION A**

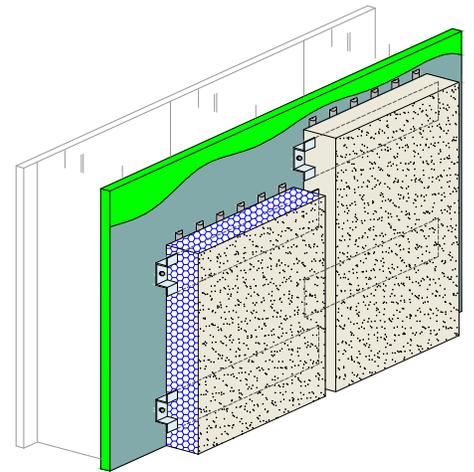

**FRONT VIEW**

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION
3. FOR FACE FASTENING ACCESS, ALLOW CHANNELS TO EXTEND PAST PANEL EDGES MINIMUM 1/2" (13MM) TO MAXIMUM 5/8" (16MM).
4. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*


**Fedderlite® Panel System**




Detail: Panel Vertical Joint - Staggered Channel Option				File Name:
Drawn by: HDE	Checked by:	Scale: NTS	Date: 12/2022	FL-04

www.tremcocpg.com



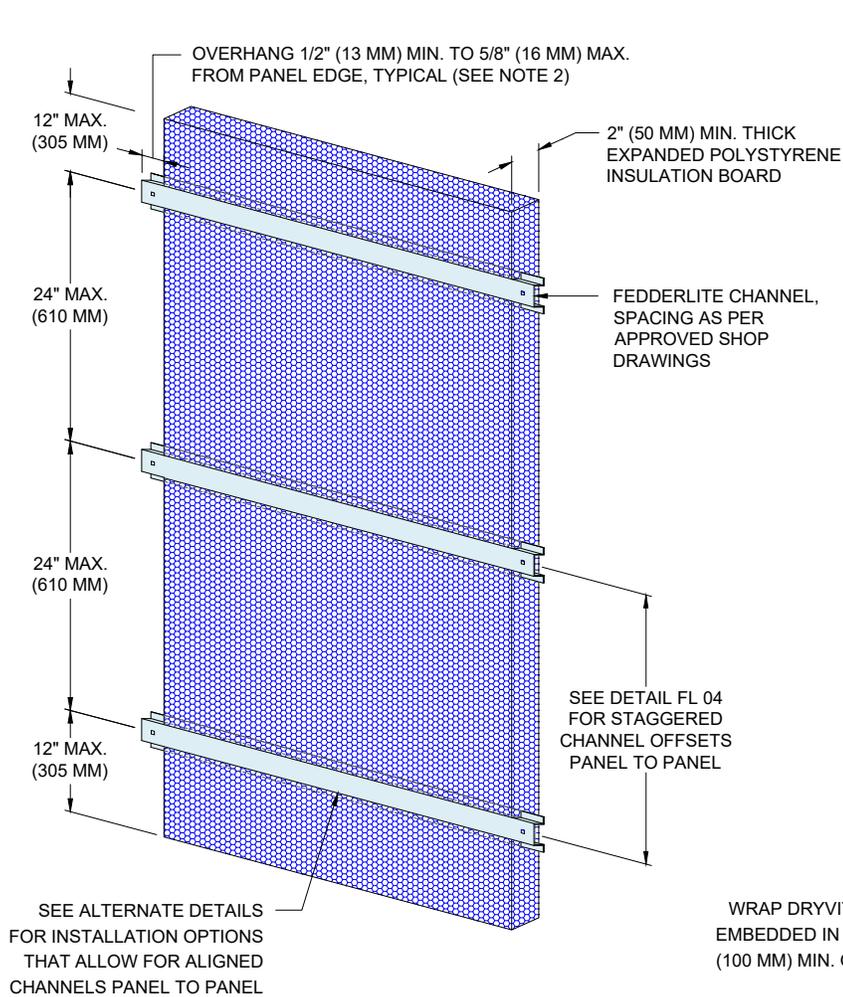

**BACK VIEW - STEP 1**

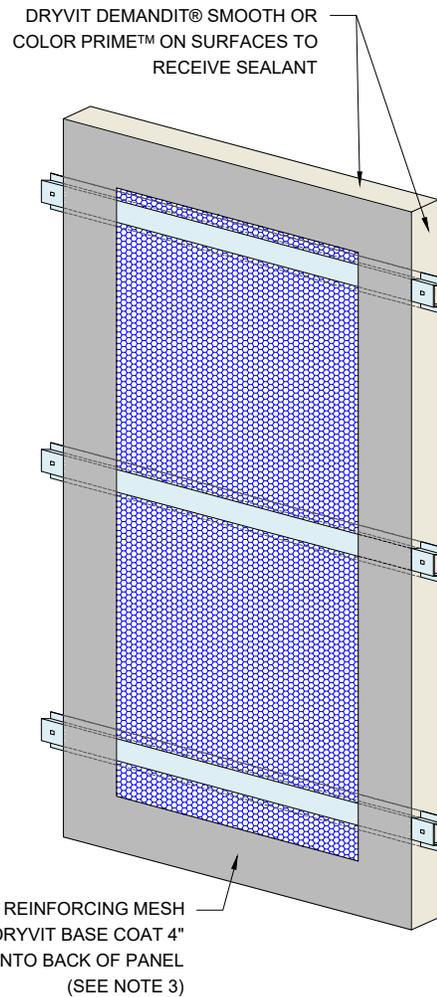

**BACK VIEW - STEP 2**

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. FOR FACE FASTENING ACCESS, ALLOW CHANNELS TO EXTEND PAST PANEL EDGES MINIMUM 1/2" (13MM) TO MAXIMUM 5/8" (16MM).
3. WHEN INSTALLATION RESULTS IN A CONTINUOUS AIR SPACE BETWEEN THE PANEL AND THE WALL GREATER THAN 1/8" (3MM), THE ENTIRE PANEL NEEDS TO BE ENCAPSULATED WITH THE REINFORCED BASE COAT.


*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Detail: Back View - Staggered Channel Option				File Name:	
Drawn by: HDE	Checked by:	Scale: NTS	Date: 12/2022	FL-05	
<a href="http://www.tremcocpg.com">www.tremcocpg.com</a>					



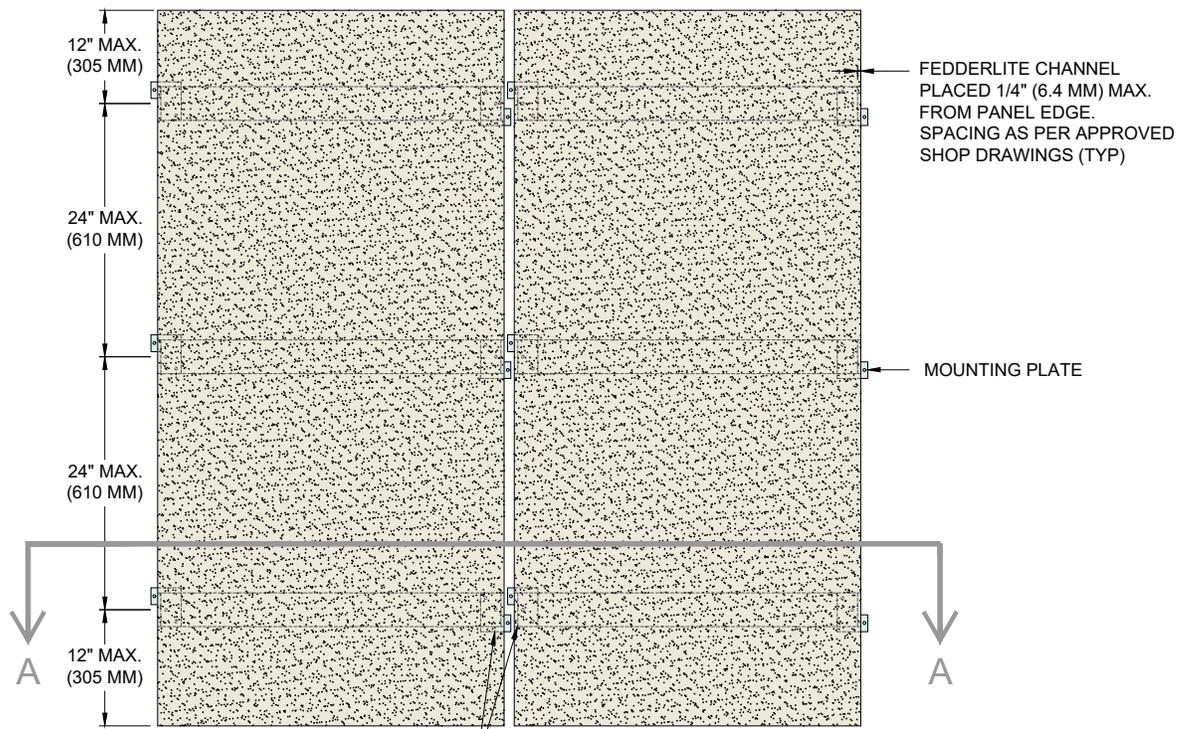


DRYVIT DEMANDIT®  
SMOOTH OR COLOR  
PRIME™ ON SURFACES  
TO RECEIVE SEALANT


MOUNTING PLATES IN  
ALTERNATING CONFIGURATION

FEDDERLITE CHANNEL  
PLACED 1/4" (6.4 MM) MAX.  
FROM PANEL EDGE.  
SPACING AS PER APPROVED  
SHOP DRAWINGS (TYP)

MOUNTING PLATE

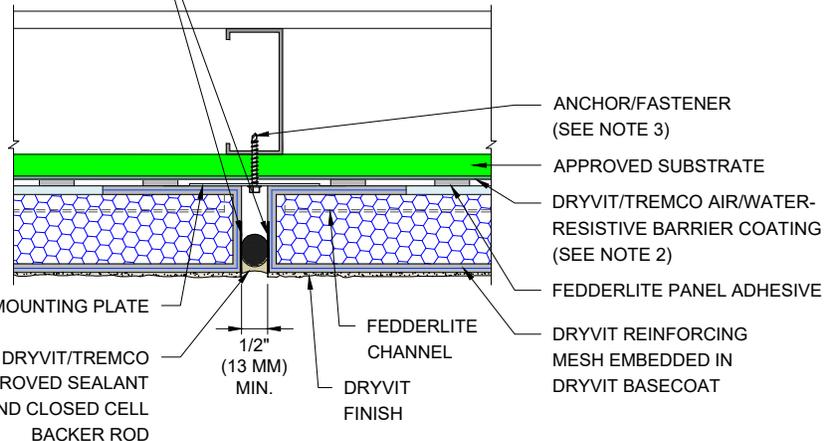

**SECTION A**

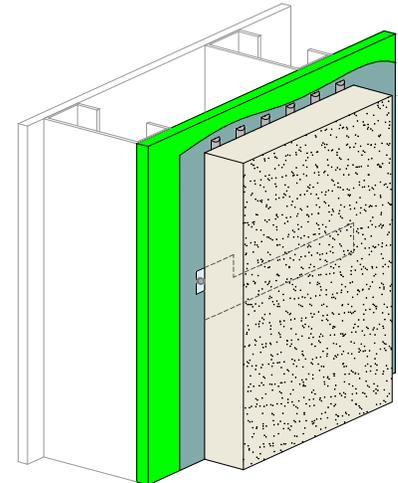

**FRONT VIEW**

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.


*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Detail: Panel Vertical Joint - Aligned Channel with Mounting Plate Option				File Name:
Drawn by: HDE	Checked by:	Scale: NTS	Date: 12/2022	FL-06
<a href="http://www.tremcocpg.com">www.tremcocpg.com</a>				



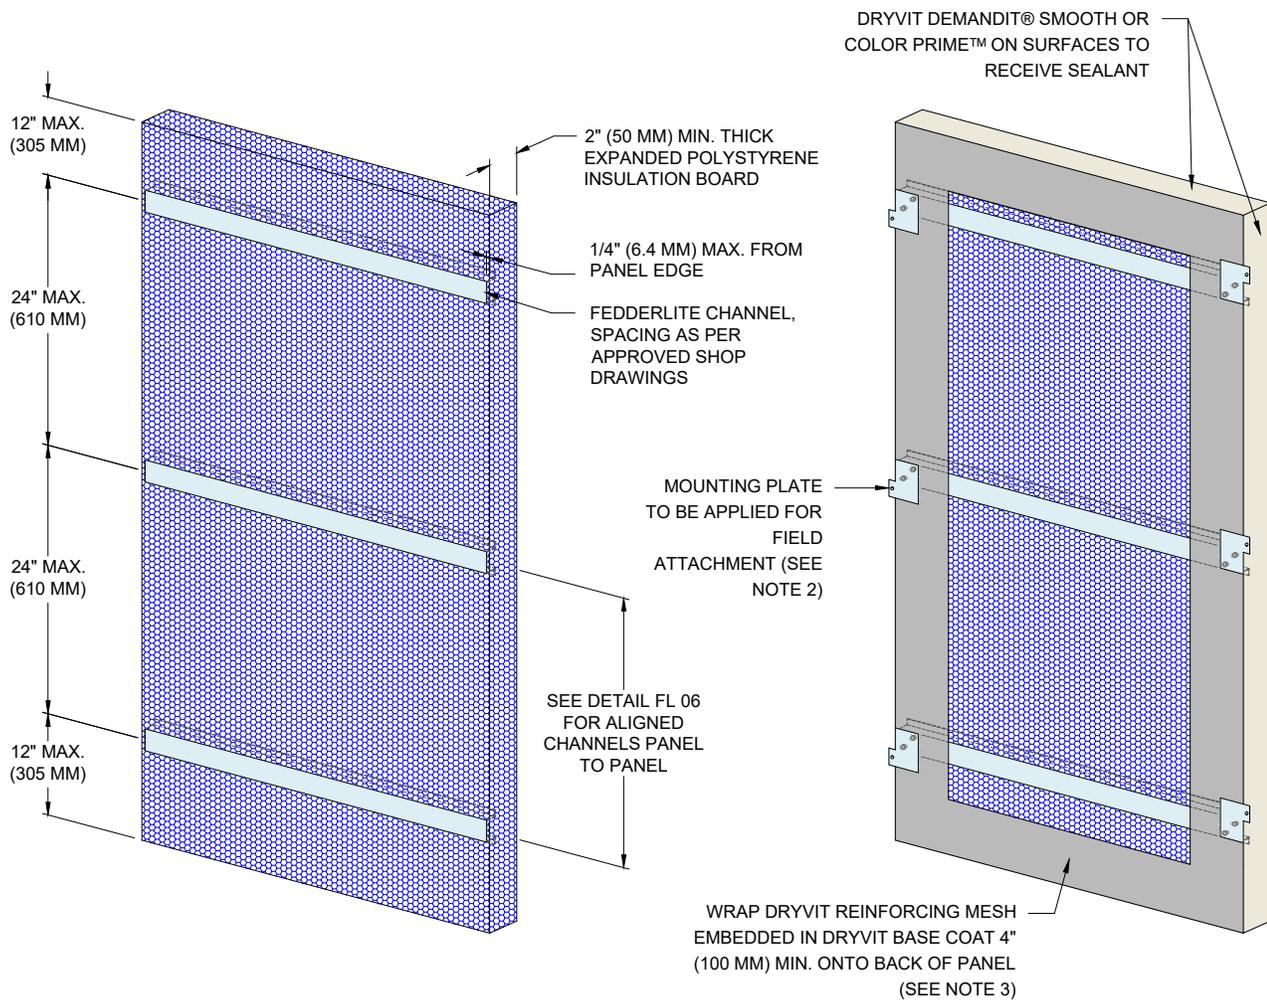

**BACK VIEW - STEP 1**

**BACK VIEW - STEP 2**


**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. ALTERNATE MOUNTING PLATE DIRECTION AT EACH SIDE OF PANEL TO ALLOW FOR ALIGNED CHANNEL INSTALLATION. SEE DETAIL FL - 06.
3. WHEN INSTALLATION RESULTS IN A CONTINUOUS AIR SPACE BETWEEN THE PANEL AND THE WALL GREATER THAN 1/8" (3MM), THE ENTIRE PANEL NEEDS TO BE ENCAPSULATED WITH THE REINFORCED BASE COAT.


*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**


<p style="font-size: 8px; margin-top: 5px;">Dryvit Technical Support: 800-556-7752</p>	Detail: Back View - Aligned Channel with Mounting Plate Option				File Name:		<p style="font-size: 8px; margin-top: 5px;">Construction Products Group</p>
	Drawn by: HDE	Checked by:	Scale: NTS	Date: 12/2022	FL-07		
www.tremcocpg.com							

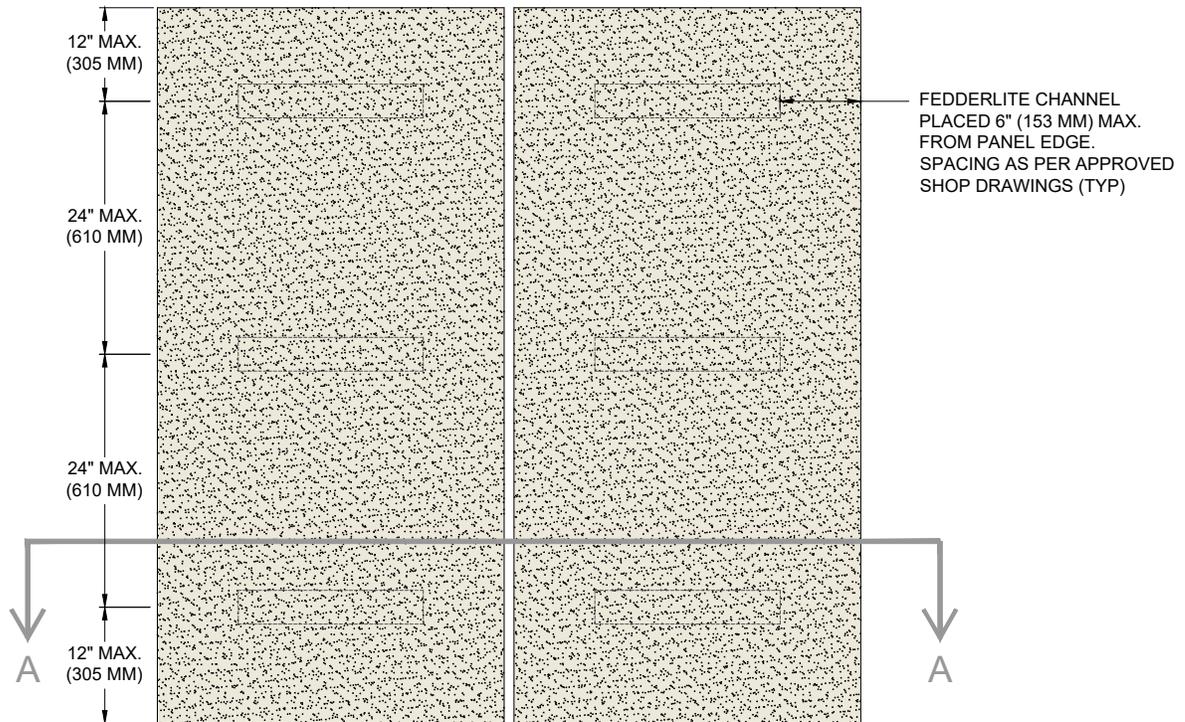

FEDDERLITE CHANNEL  
PLACED 6" (153 MM) MAX.  
FROM PANEL EDGE.  
SPACING AS PER APPROVED  
SHOP DRAWINGS (TYP)

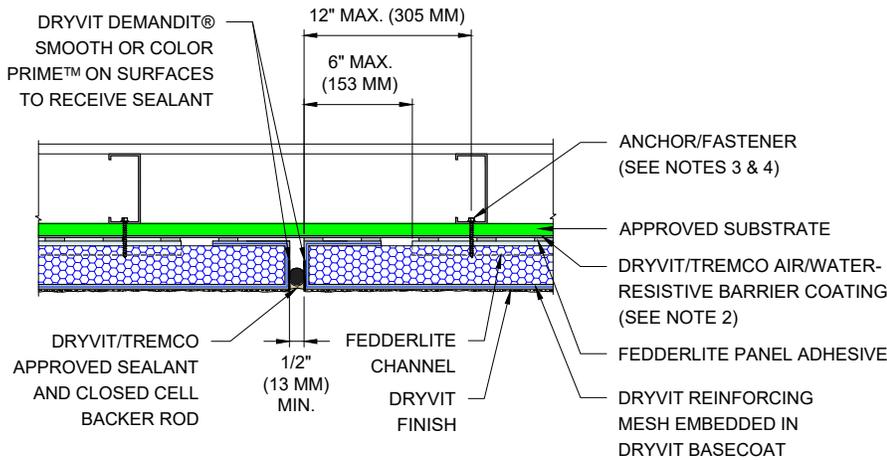

**SECTION A**

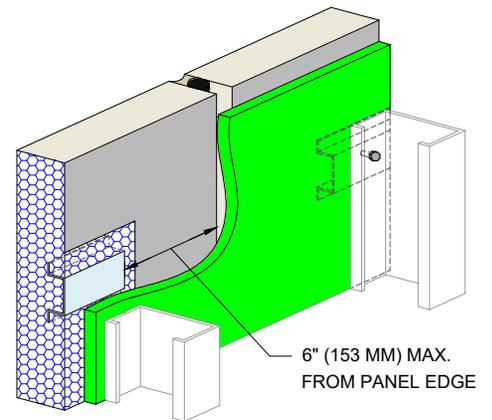

**BACK VIEW**

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.
4. BACK FASTEN THROUGH STUD FLANGE INTO FEDDERLITE CHANNEL AS NOTED IN APPROVED STRUCTURAL DRAWINGS.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Panel Vertical Joint - Back Fastened Method

Drawn by: HDE

Checked by:

Scale: NTS


Date: 12/2022

File Name:


FL-08



[www.tremcocpg.com](http://www.tremcocpg.com)

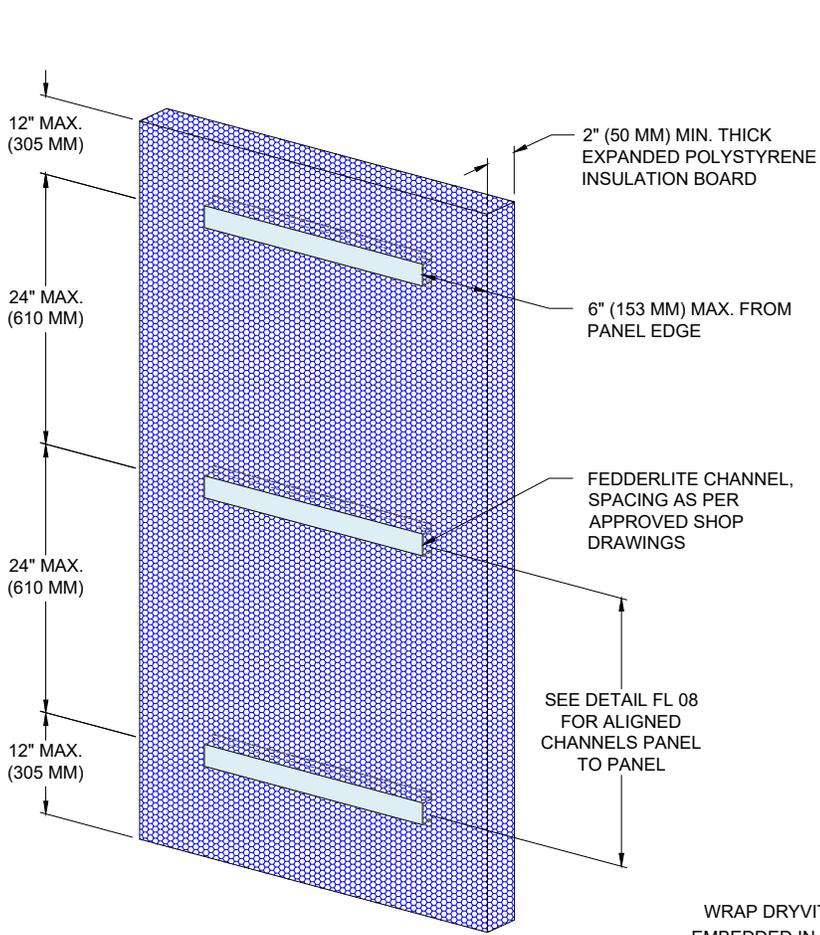

**BACK VIEW - STEP 1**

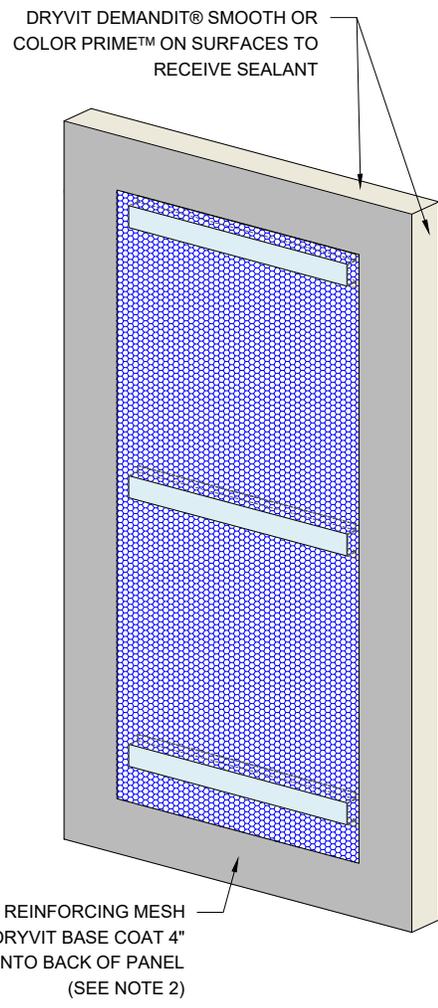

**BACK VIEW - STEP 2**

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. WHEN INSTALLATION RESULTS IN A CONTINUOUS AIR SPACE BETWEEN THE PANEL AND THE WALL GREATER THAN 1/8" (3MM), THE ENTIRE PANEL NEEDS TO BE ENCAPSULATED WITH THE REINFORCED BASE COAT.

The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.

**Fedderlite® Panel System**




Dryvit Technical Support: 800-556-7752


Detail: Back View - Back Fastened Option				File Name:	
Drawn by: HDE	Checked by:	Scale: NTS	Date: 12/2022	FL-09	
<a href="http://www.tremcocpg.com">www.tremcocpg.com</a>					



**TYPICAL ADHESIVE  
PATTERN WHEN USING  
DRYVIT AP  
ADHESIVE™ (SEE  
NOTE 4) OR  
TREMGRIP®**

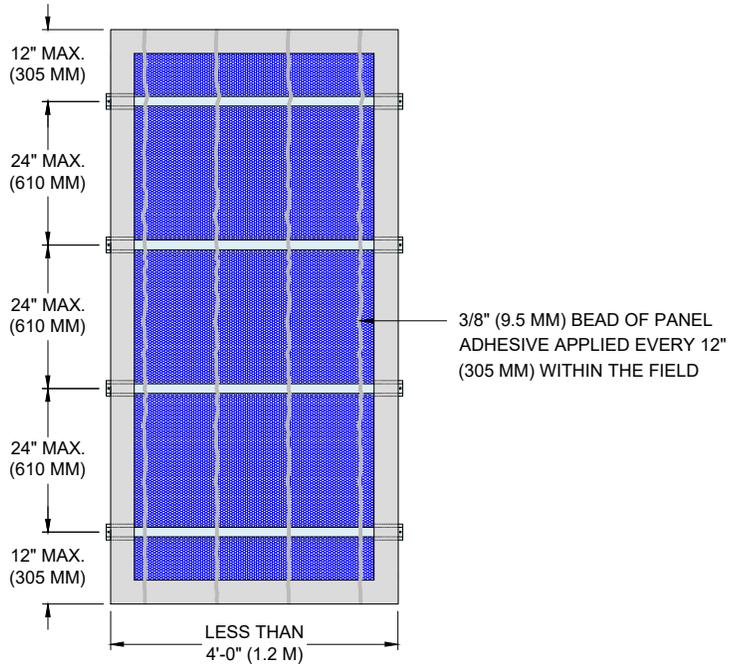

**TYPICAL ADHESIVE  
PATTERN WHEN USING  
DRYVIT PRIMUS® OR  
GENESIS ADHESIVE®**

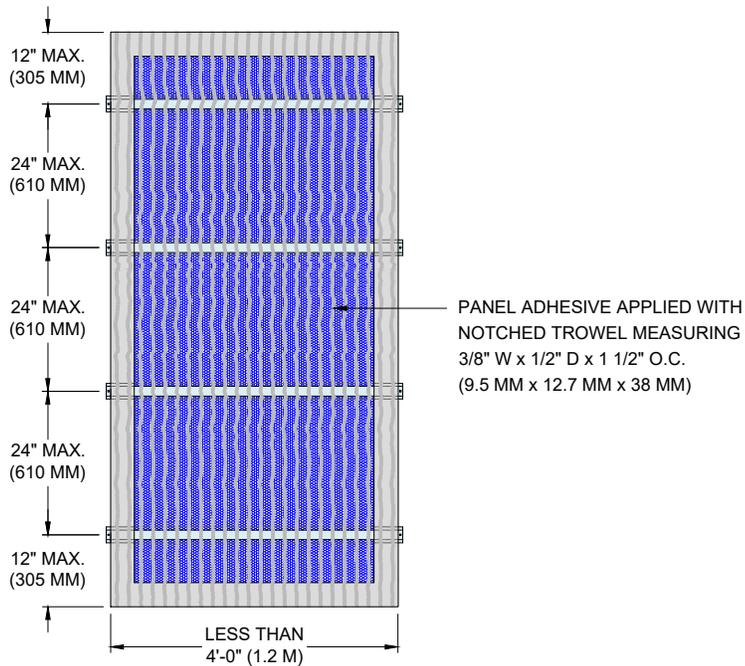

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.
4. FOR APPROVED SUBSTRATES FOR DRYVIT AP ADHESIVE REFER TO DRYVIT DATA SHEET DS454.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Adhesive Attachment Methods for Panels Less than 4'-0" Wide<sup>3</sup>

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022

File Name:


FL-10




Construction Products Group

www.tremcocpg.com

**TYPICAL ADHESIVE PATTERN WHEN USING DRYVIT AP ADHESIVE™ (SEE NOTE 5) OR TREMGRIP®**

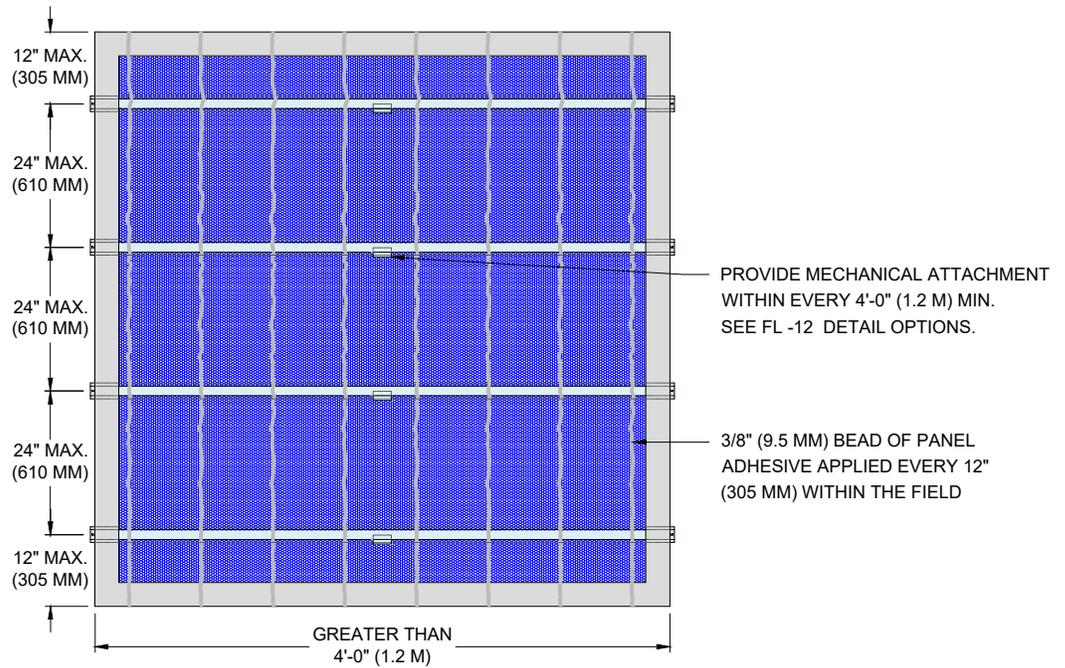

**TYPICAL ADHESIVE PATTERN WHEN USING DRYVIT PRIMUS® OR GENESIS ADHESIVE®**

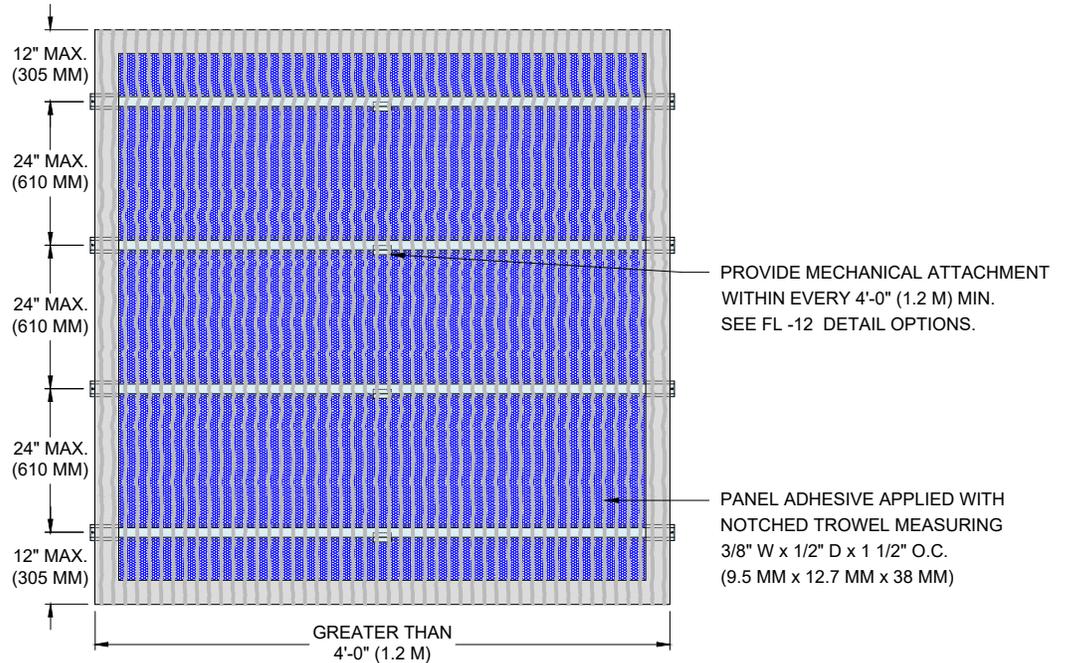

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR ARWB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.
4. PANEL WIDTHS IN EXCESS OF 4'-0" REQUIRE MECHANICAL ATTACHMENT WITHIN EVERY 4'-0" (1.2M) TO ENSURE FULL ADHESIVE ENGAGEMENT. FEDDERLITE M CHANNEL WITH MOUNTING RAIL CLIP, BACK FASTENED, OR ANOTHER VERSION OF CLIP AS PER SHOP DRAWINGS MAY BE USED TO ACCOMPLISH THIS.
5. FOR APPROVED SUBSTRATES FOR DRYVIT AP ADHESIVE REFER TO DRYVIT DATA SHEET DS454.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Adhesive Attachment Methods for Panels Greater than 4'-0" Wide<sup>3</sup>

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022






File Name:

FL-11



Construction Products Group

www.tremcocpg.com

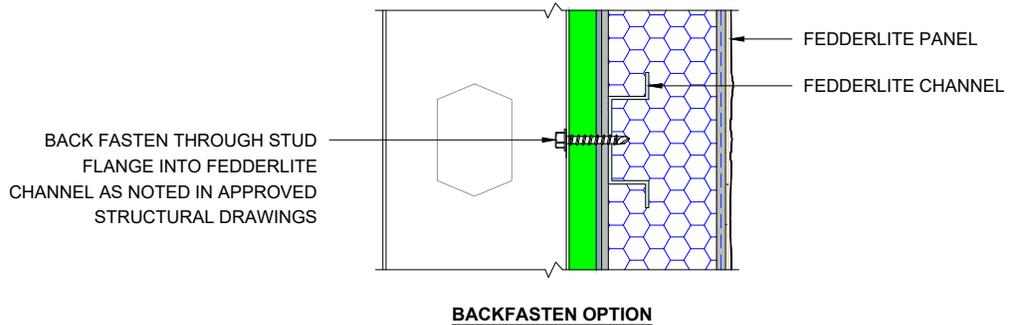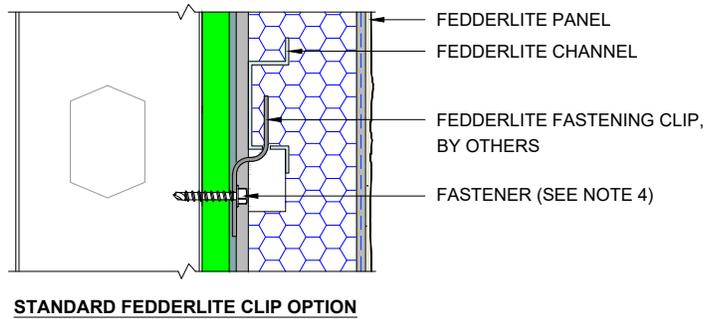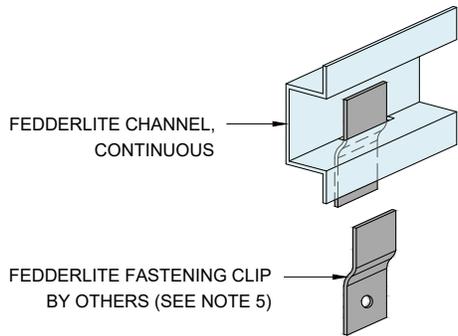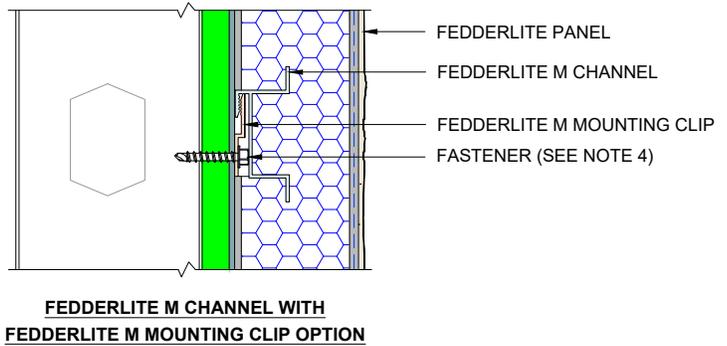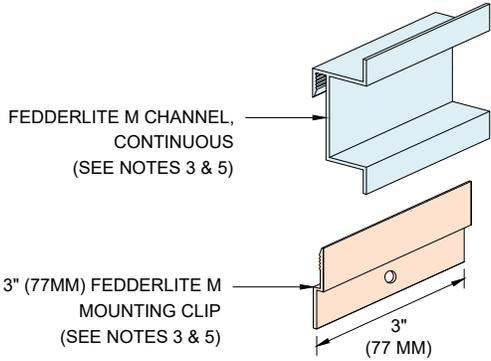

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. REFER TO PUBLICATION DS949 FOR FEDDERLITE M COMPONENT DIMENSIONS NOT SHOWN ABOVE.
4. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217. DETAILS ABOVE ARE INTENDED FOR FIELD OF PANEL FOR PANELS GREATER THAN 4'-0" (1.2M) WIDTH.
5. WHEN USING THE CLIP BE SURE TO ALLOW FOR 3/4" (19 MM) MINIMUM CLEARANCE FOR ADEQUATE LIFT TO ENGAGE CLIP.
6. WHEN USED WITHOUT PANEL ADHESIVE CLIPS AND CLIP SPACING MUST BE ENGINEERED BY THE PANEL FABRICATOR FOR THE APPROPRIATE PROJECT DESIGN WIND LOAD.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Detail: Fastening Methods - Field of Panel<sup>4</sup>

File Name:

Drawn by: HDE




Checked by:

Scale: NTS

Date: 12/2022

FL-12



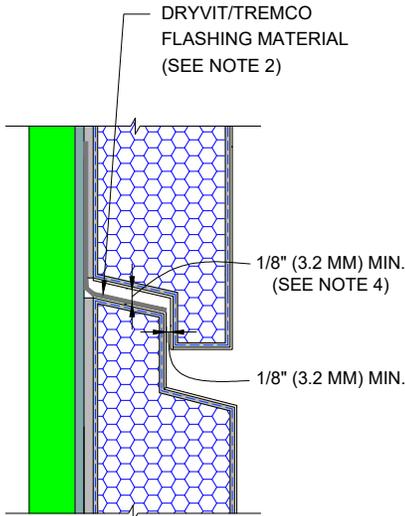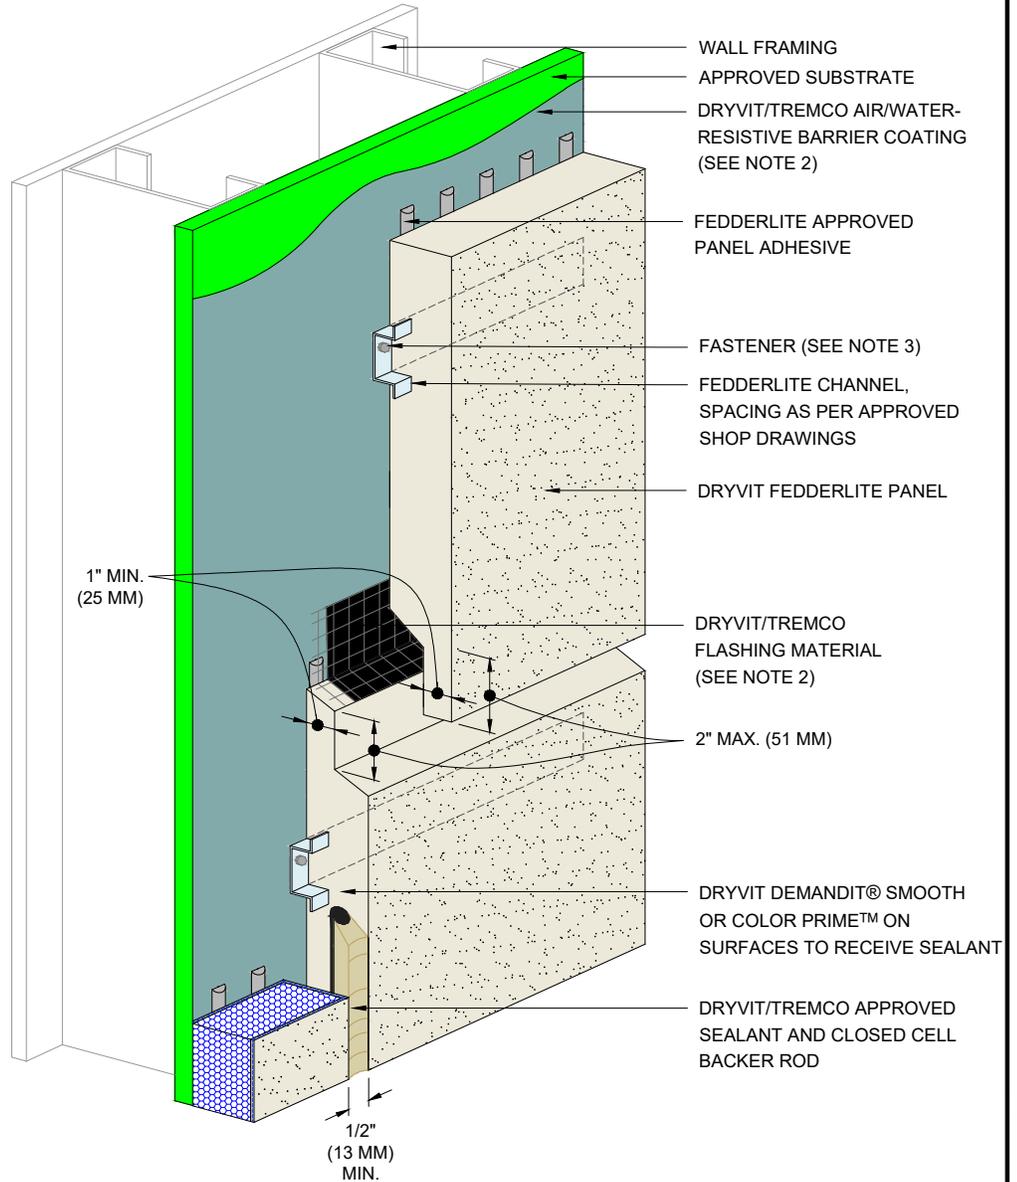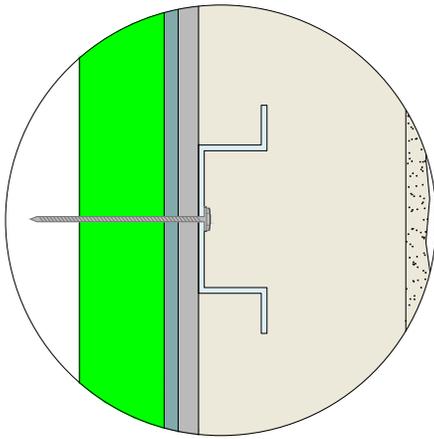

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.
4. HONOR ALL BUILDING EXPANSION JOINTS AND SIZE ACCORDINGLY AS PER SHOP DRAWINGS.

The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Horizontal Shiplap Joint with Drainage

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022




File Name:

FL-13



Construction Products Group

www.tremcocpg.com

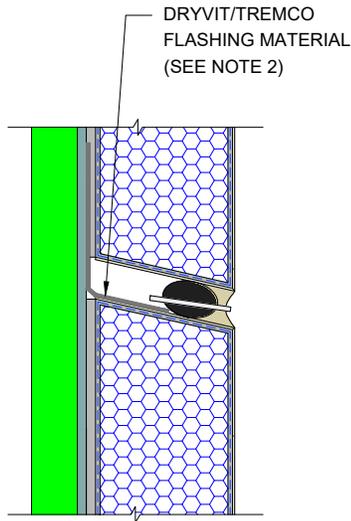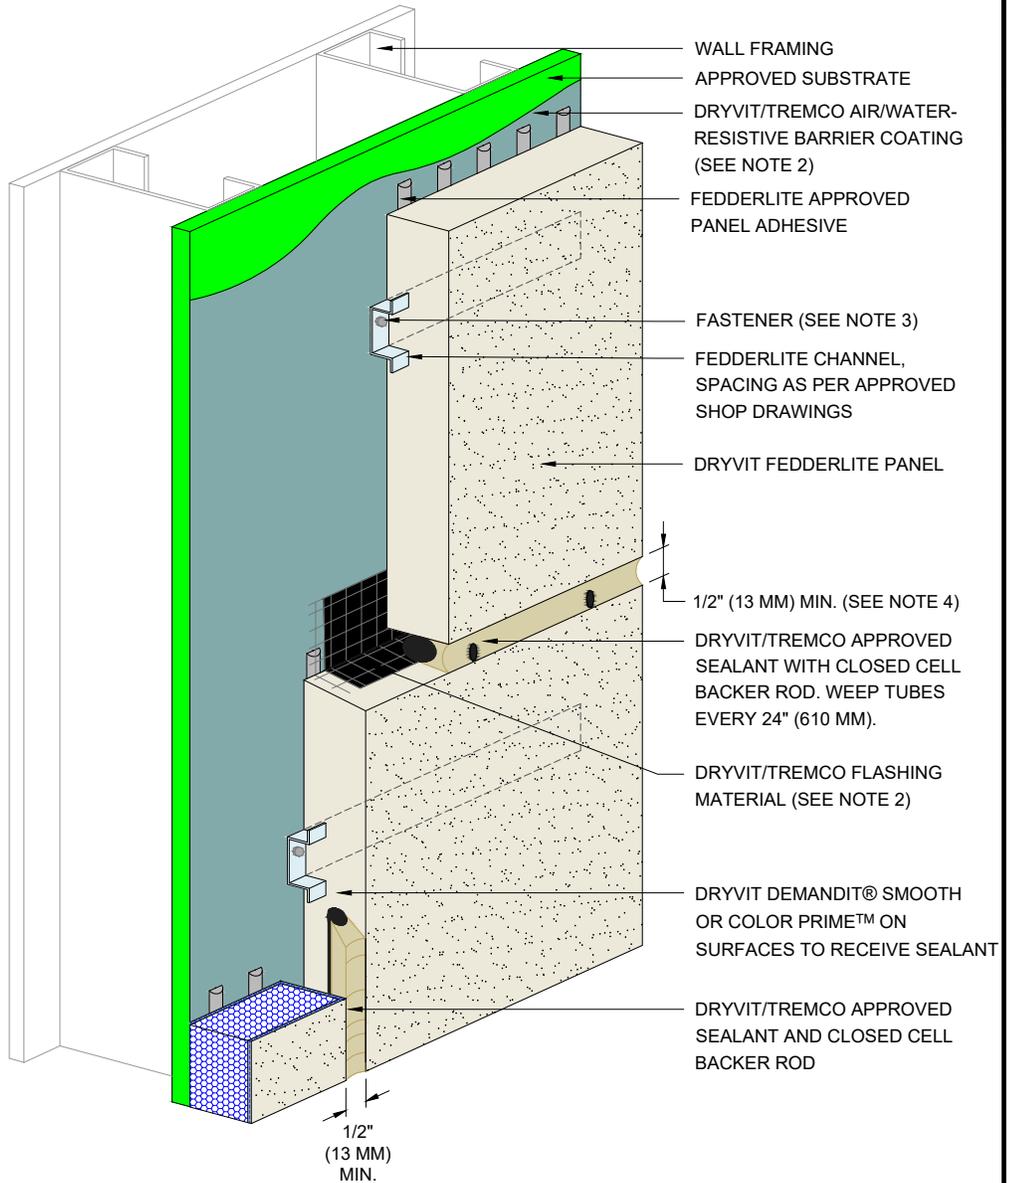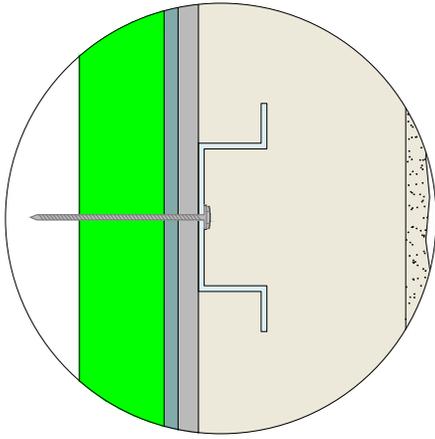

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.
4. HONOR ALL BUILDING EXPANSION JOINTS AND SIZE ACCORDINGLY AS PER SHOP DRAWINGS.

The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Horizontal Joint with Drainage

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022




File Name:

FL-14



Construction Products Group

www.tremcocpg.com

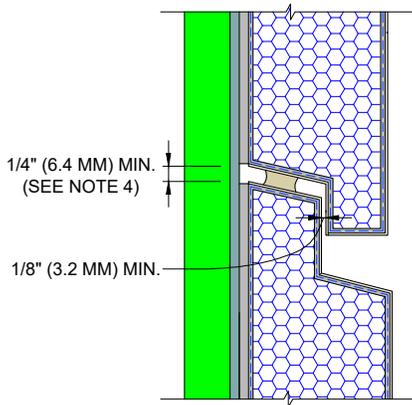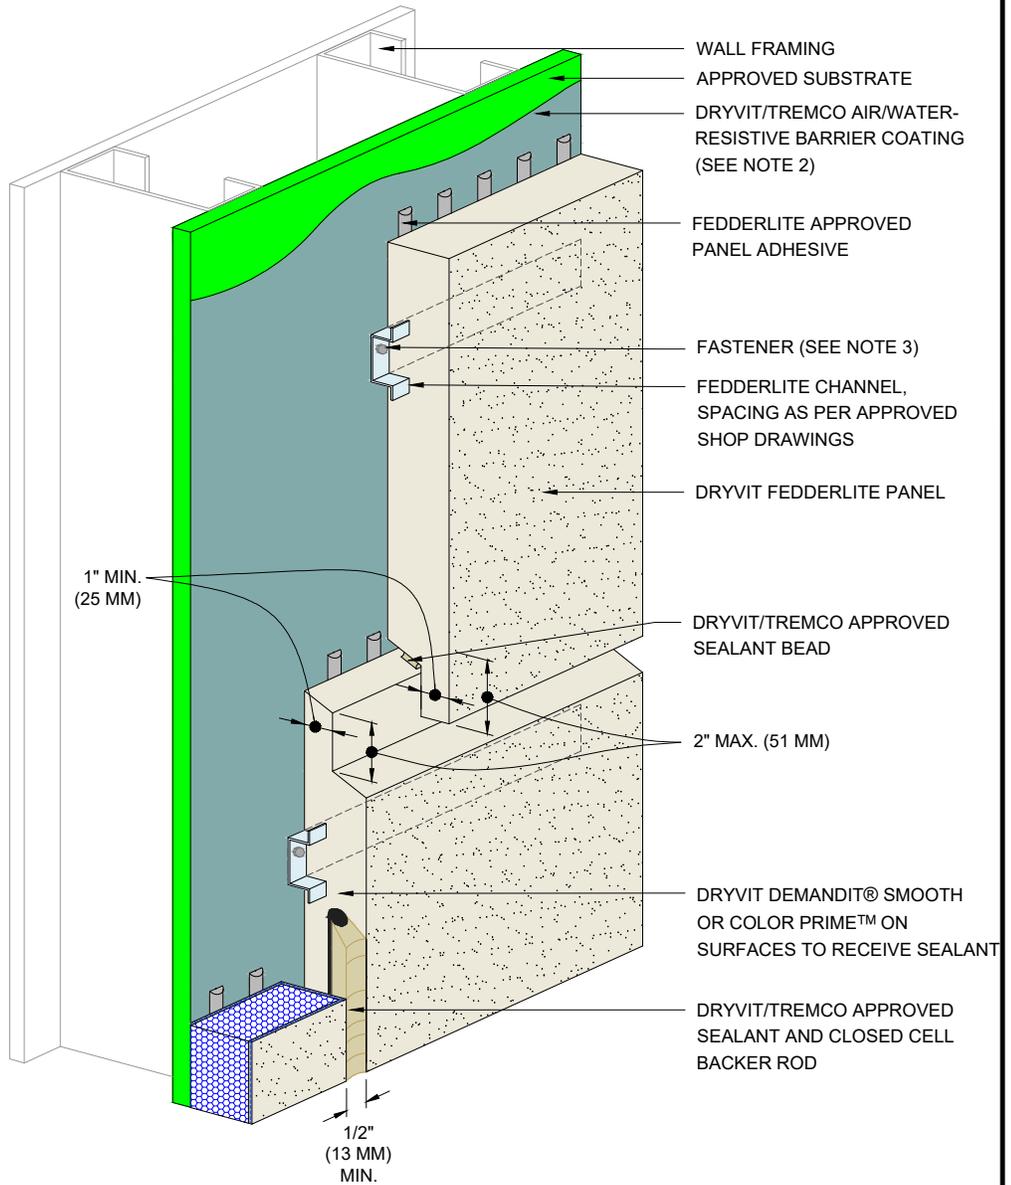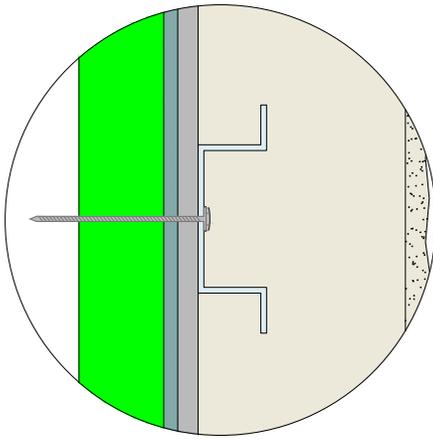

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.
4. HONOR ALL BUILDING EXPANSION JOINTS AND SIZE ACCORDINGLY AS PER SHOP DRAWINGS.

The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Horizontal Shiplap Joint

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022




File Name:

FL-15



Construction Products Group

www.tremcocpg.com

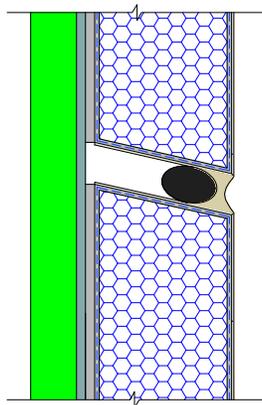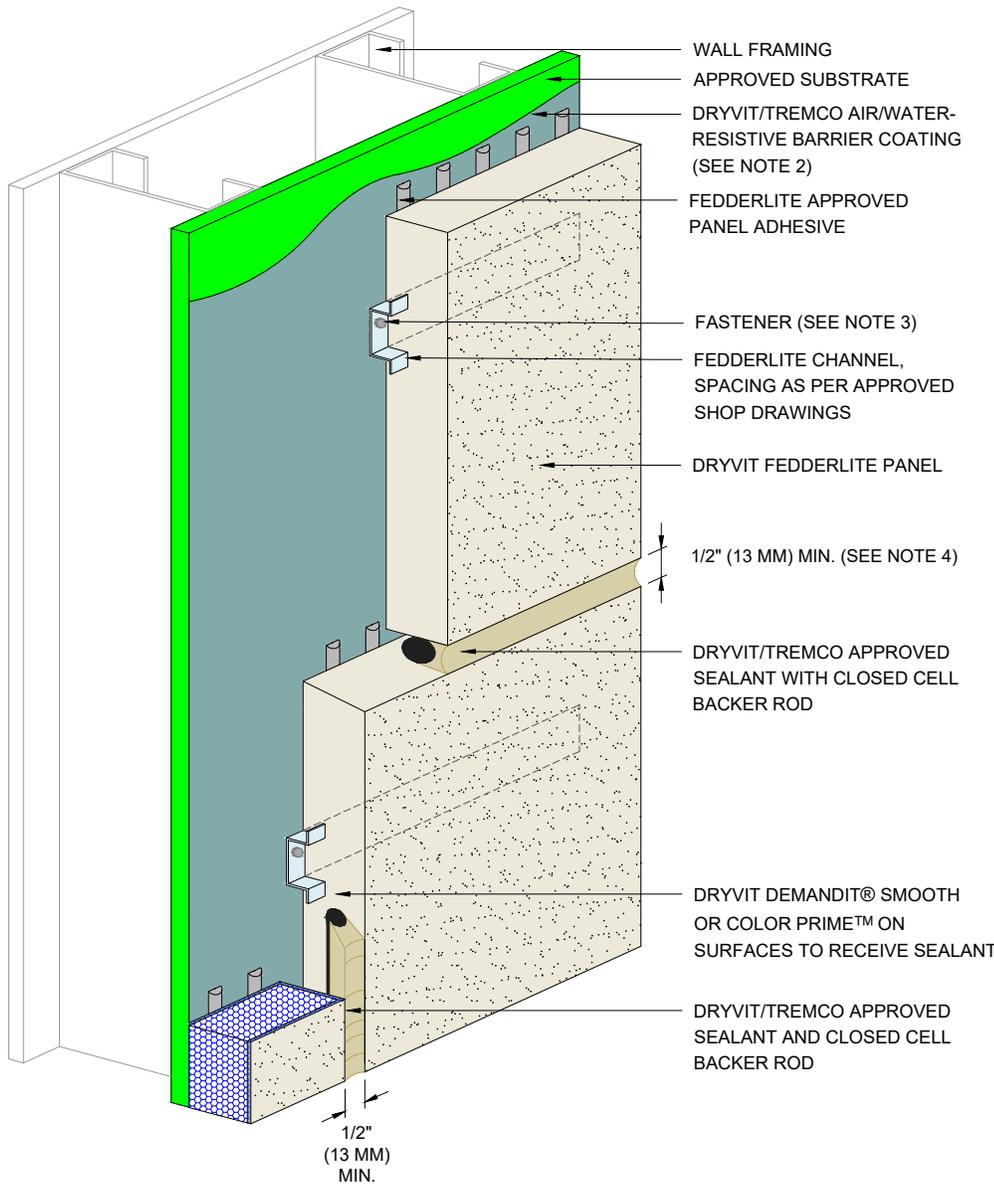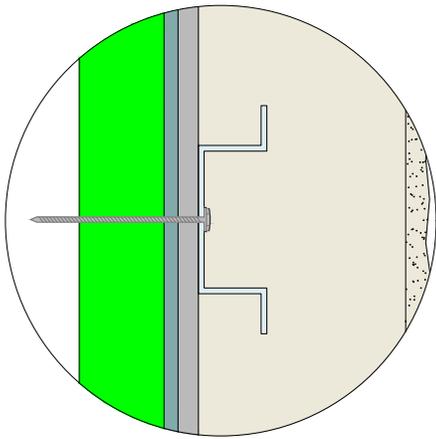

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.
4. HONOR ALL BUILDING EXPANSION JOINTS AND SIZE ACCORDINGLY AS PER SHOP DRAWINGS.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Horizontal Joint

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-16



Construction Products Group

www.tremcocpg.com

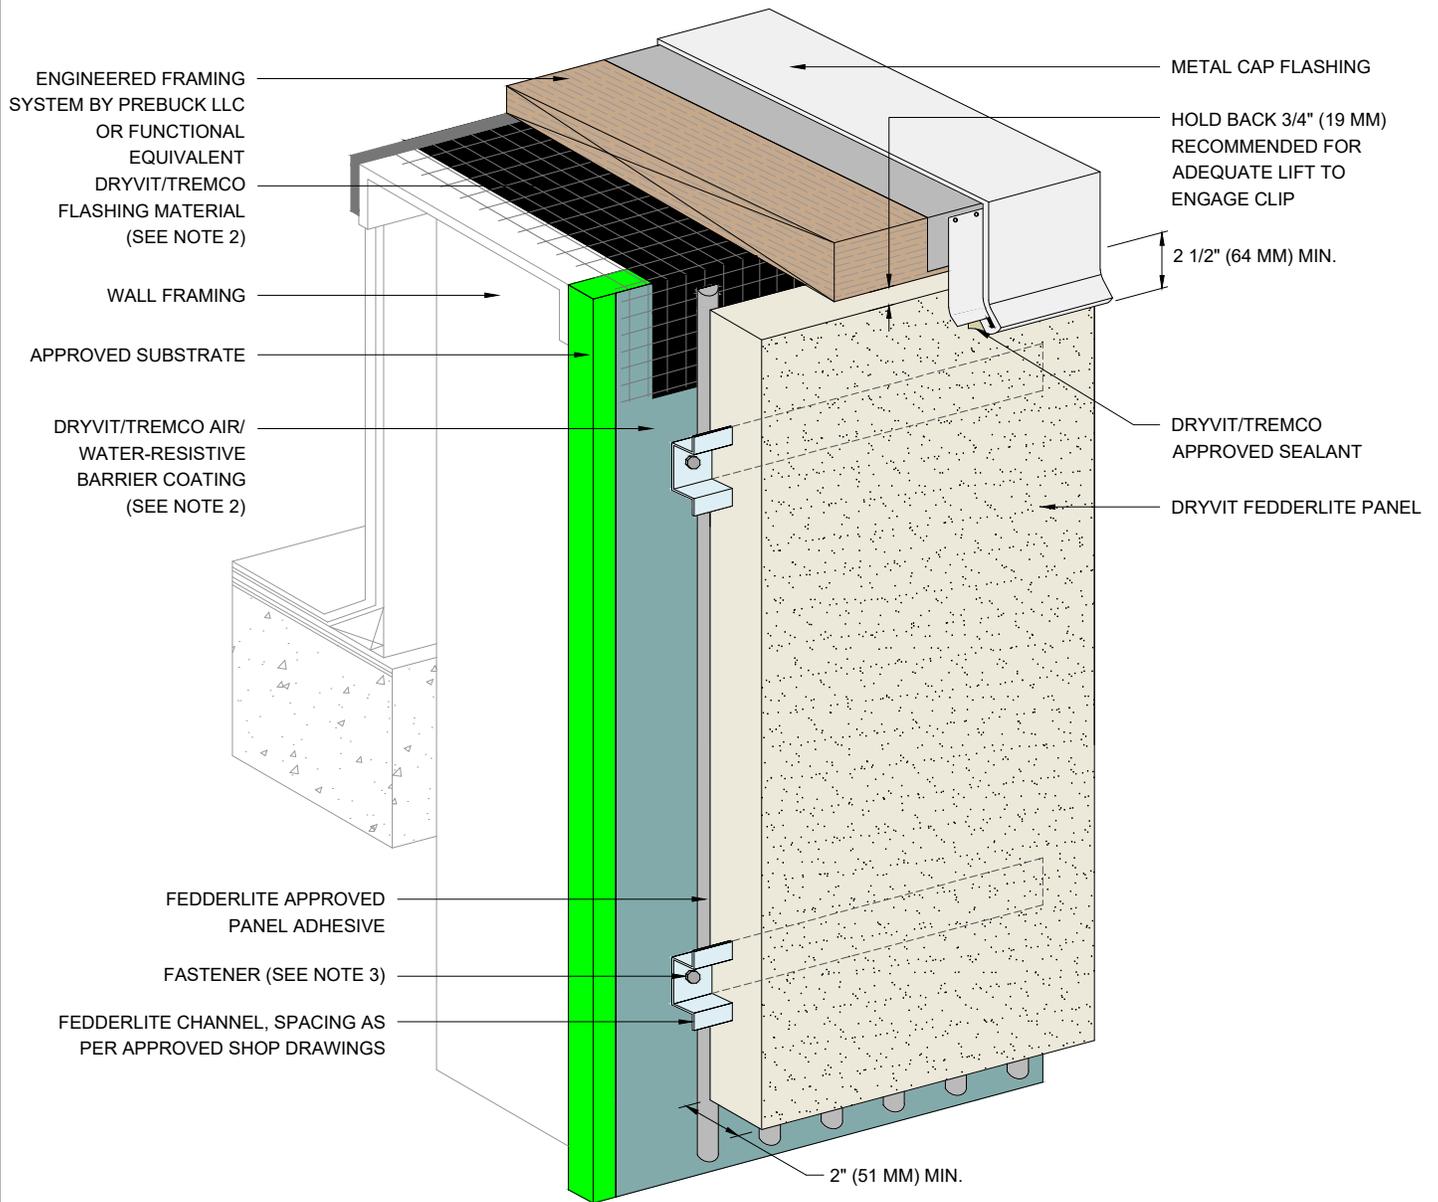

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Parapet

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-17



Construction Products Group

www.tremcocpg.com

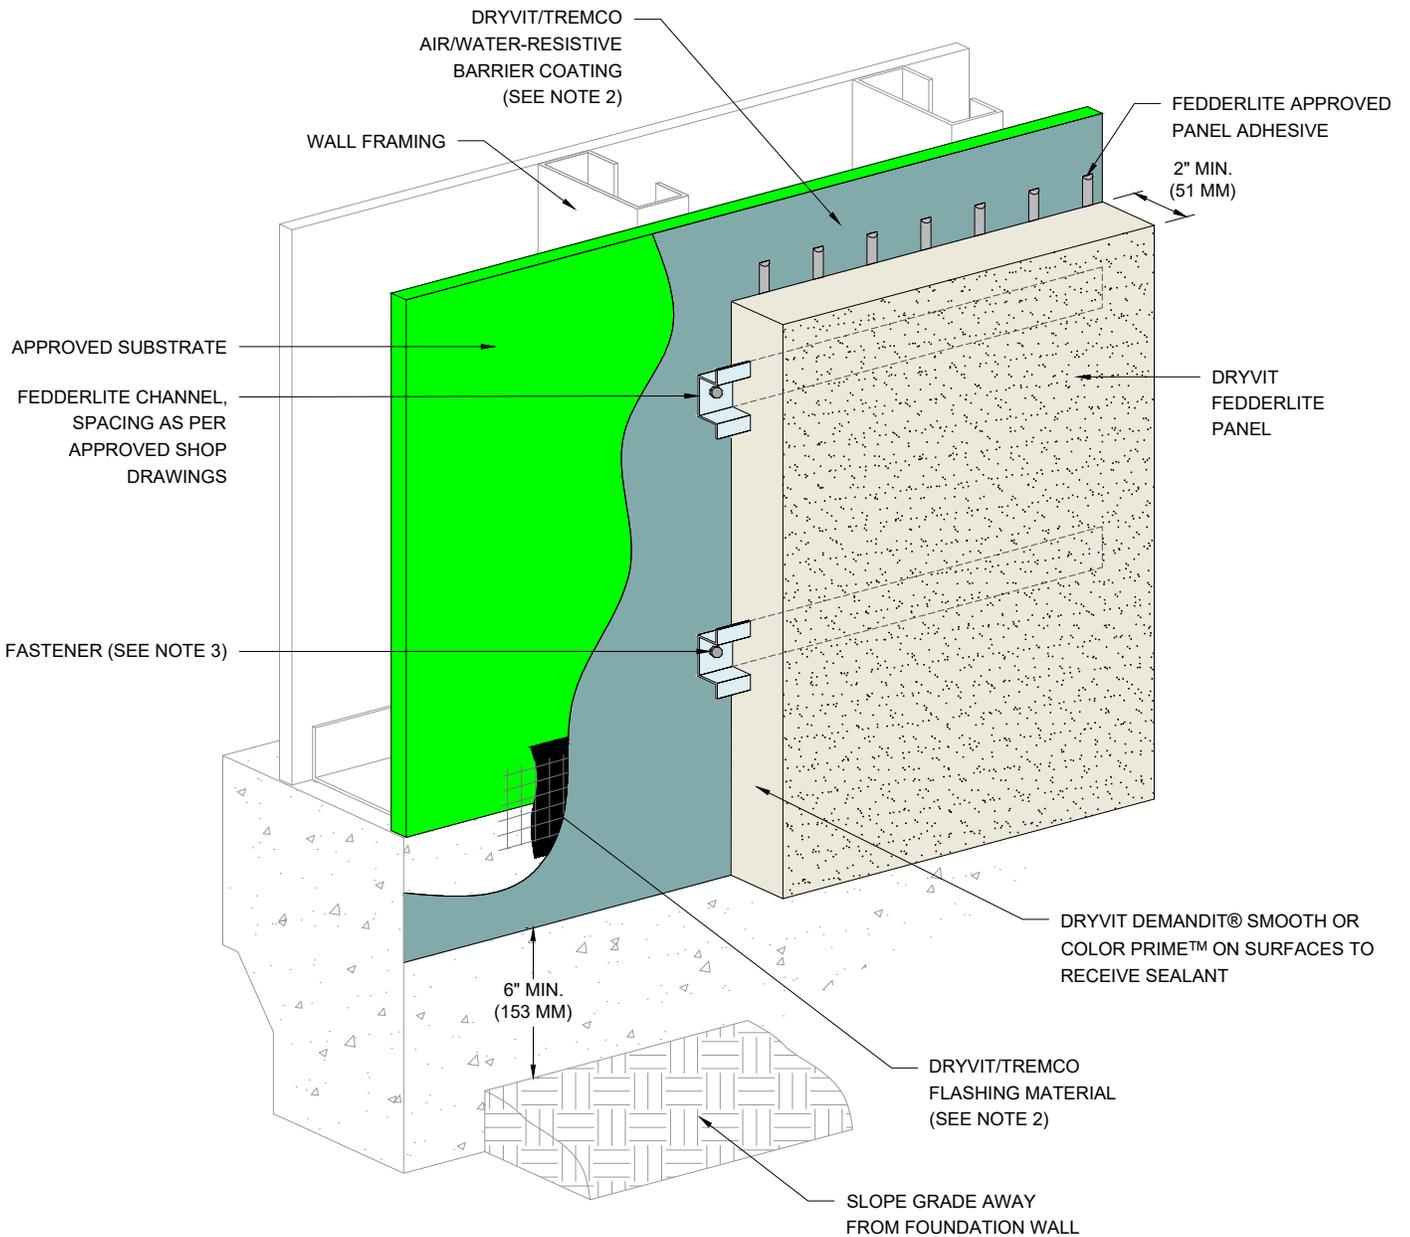

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Foundation at Grade - Flush Substrate

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-18



Construction Products Group

[www.tremcocpg.com](http://www.tremcocpg.com)

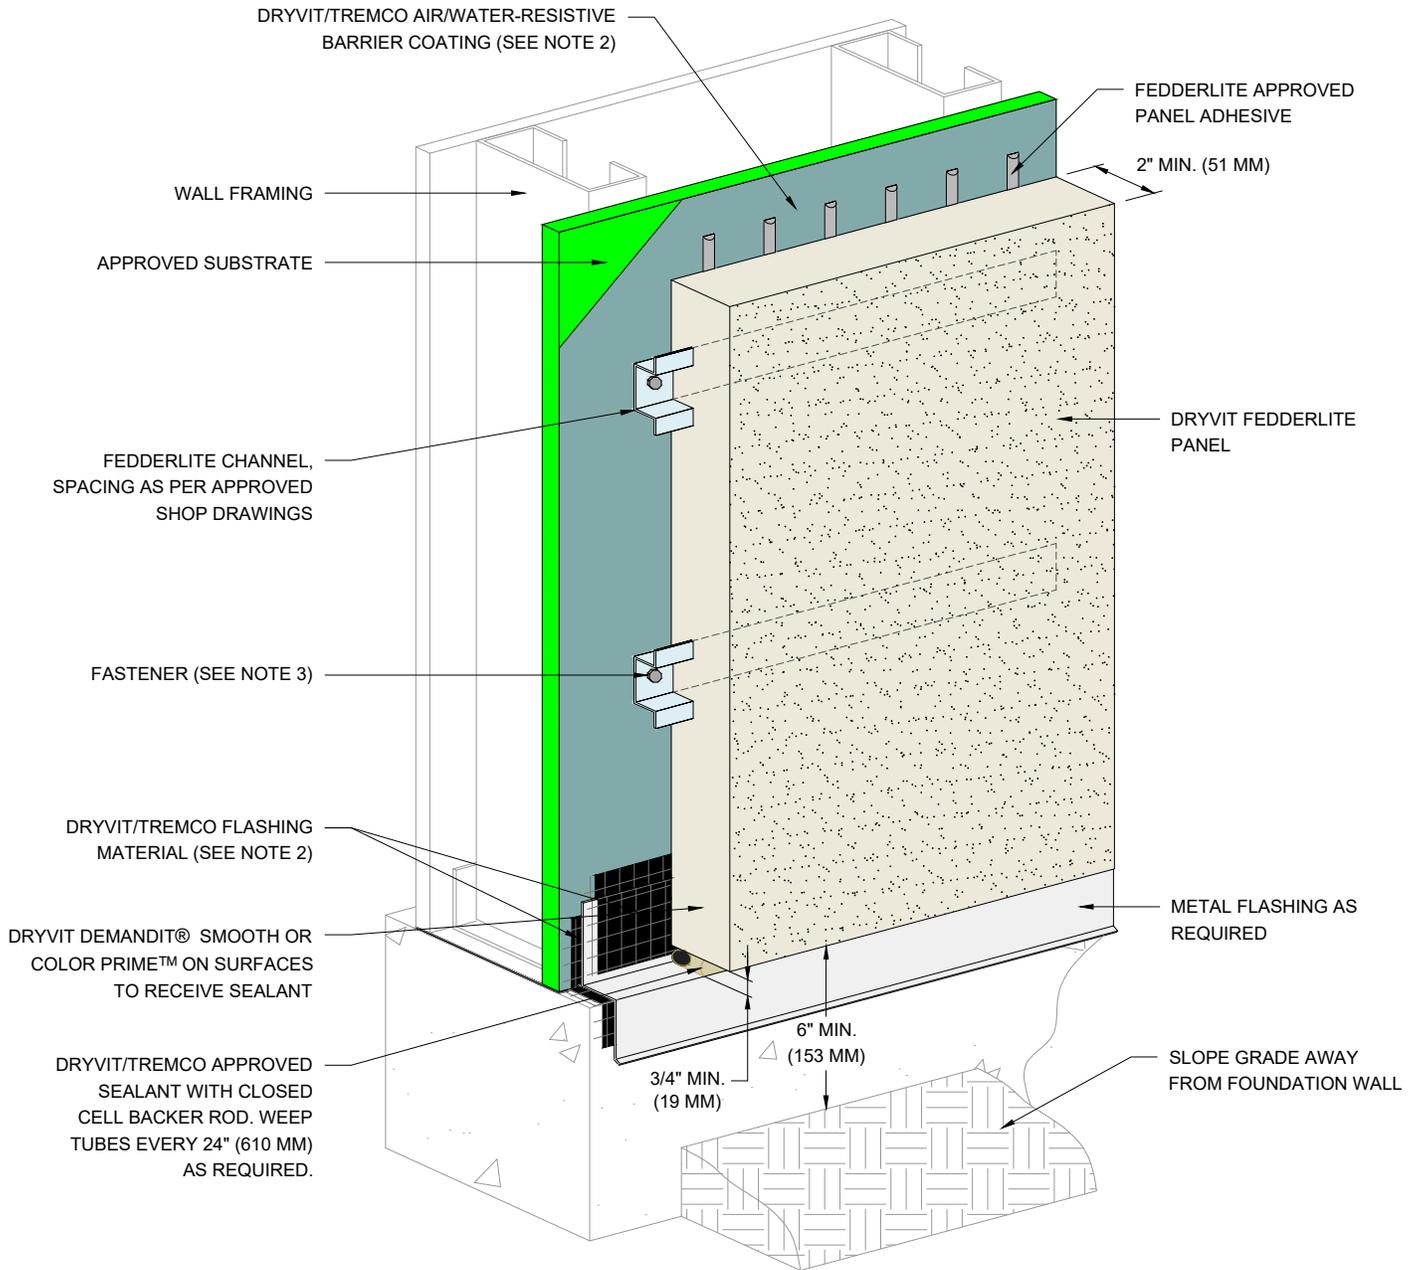

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Foundation at Grade - Recessed Substrate

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-19



Construction Products Group

www.tremcocpg.com

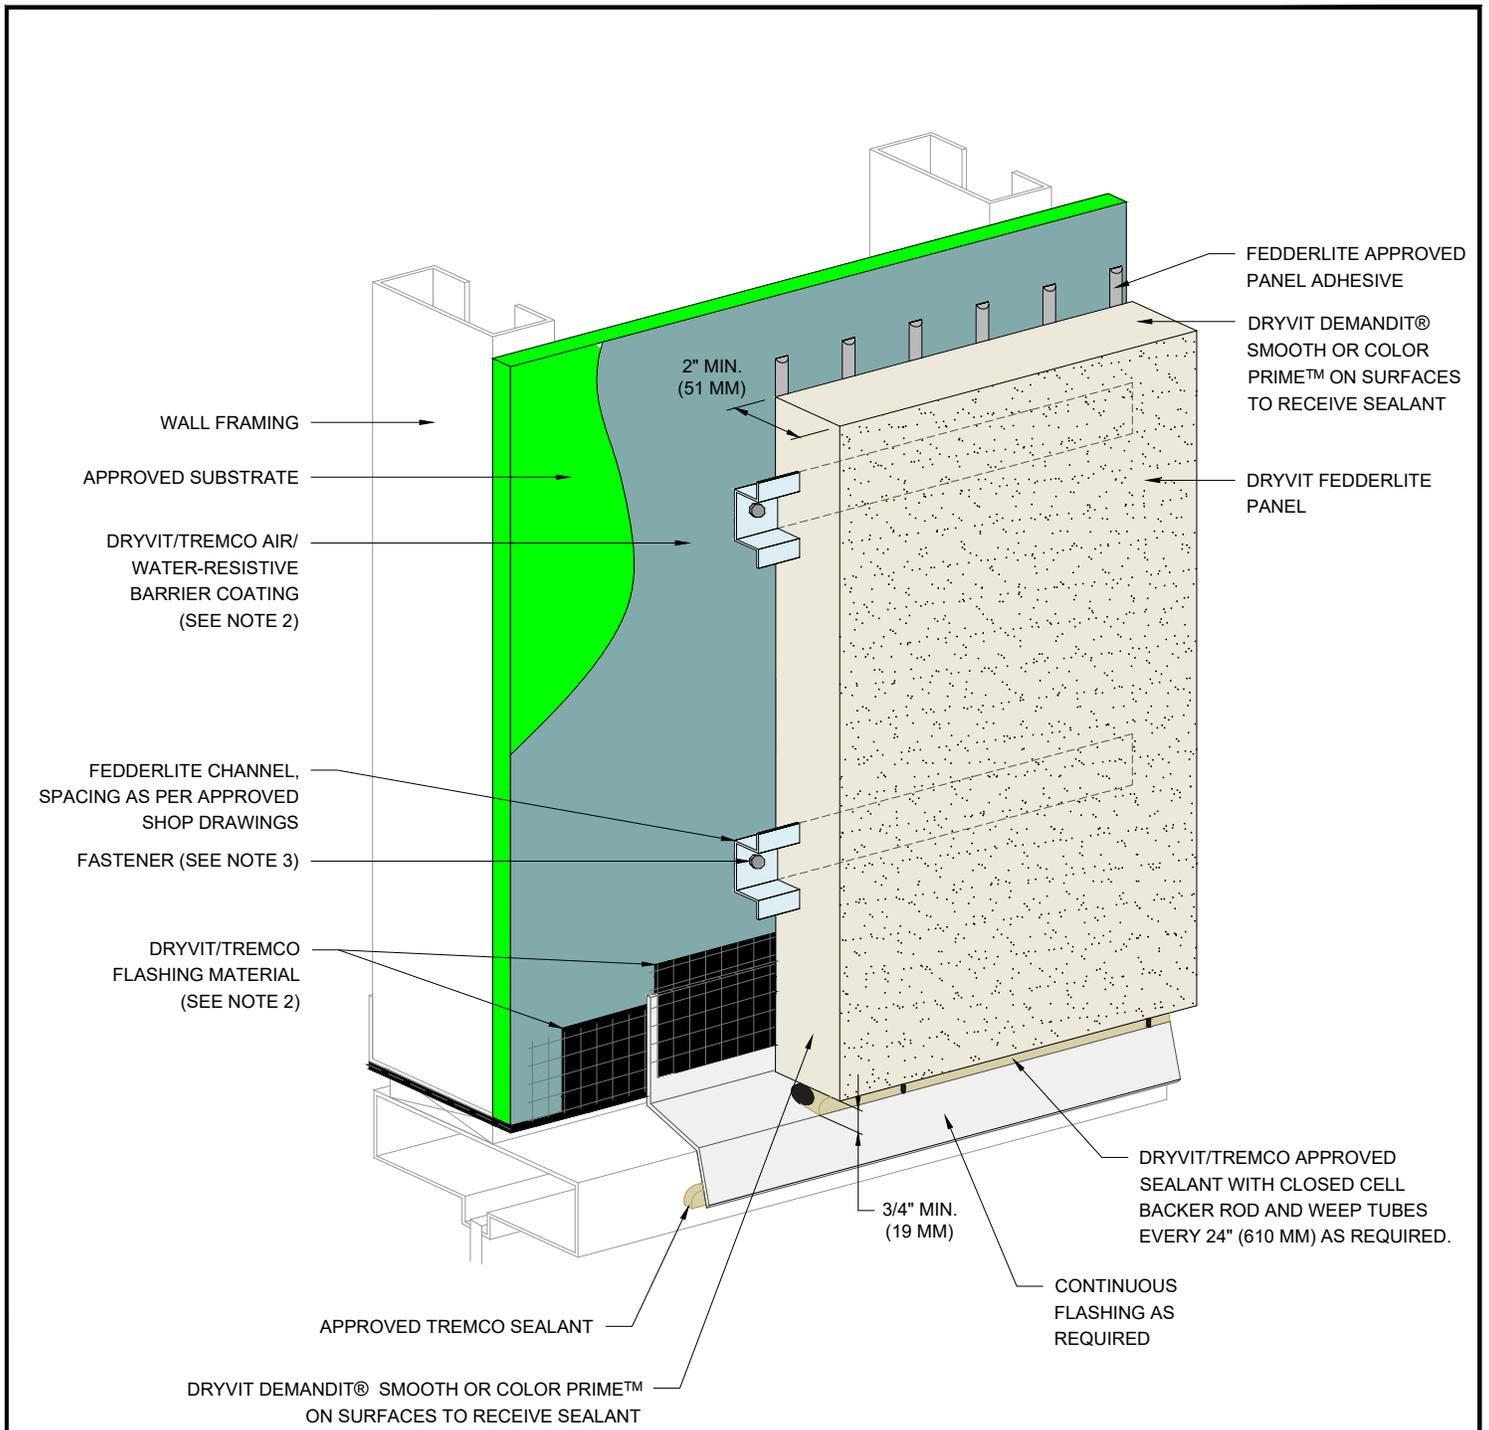

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Head

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-20

[www.tremcocpg.com](http://www.tremcocpg.com)



Construction Products Group

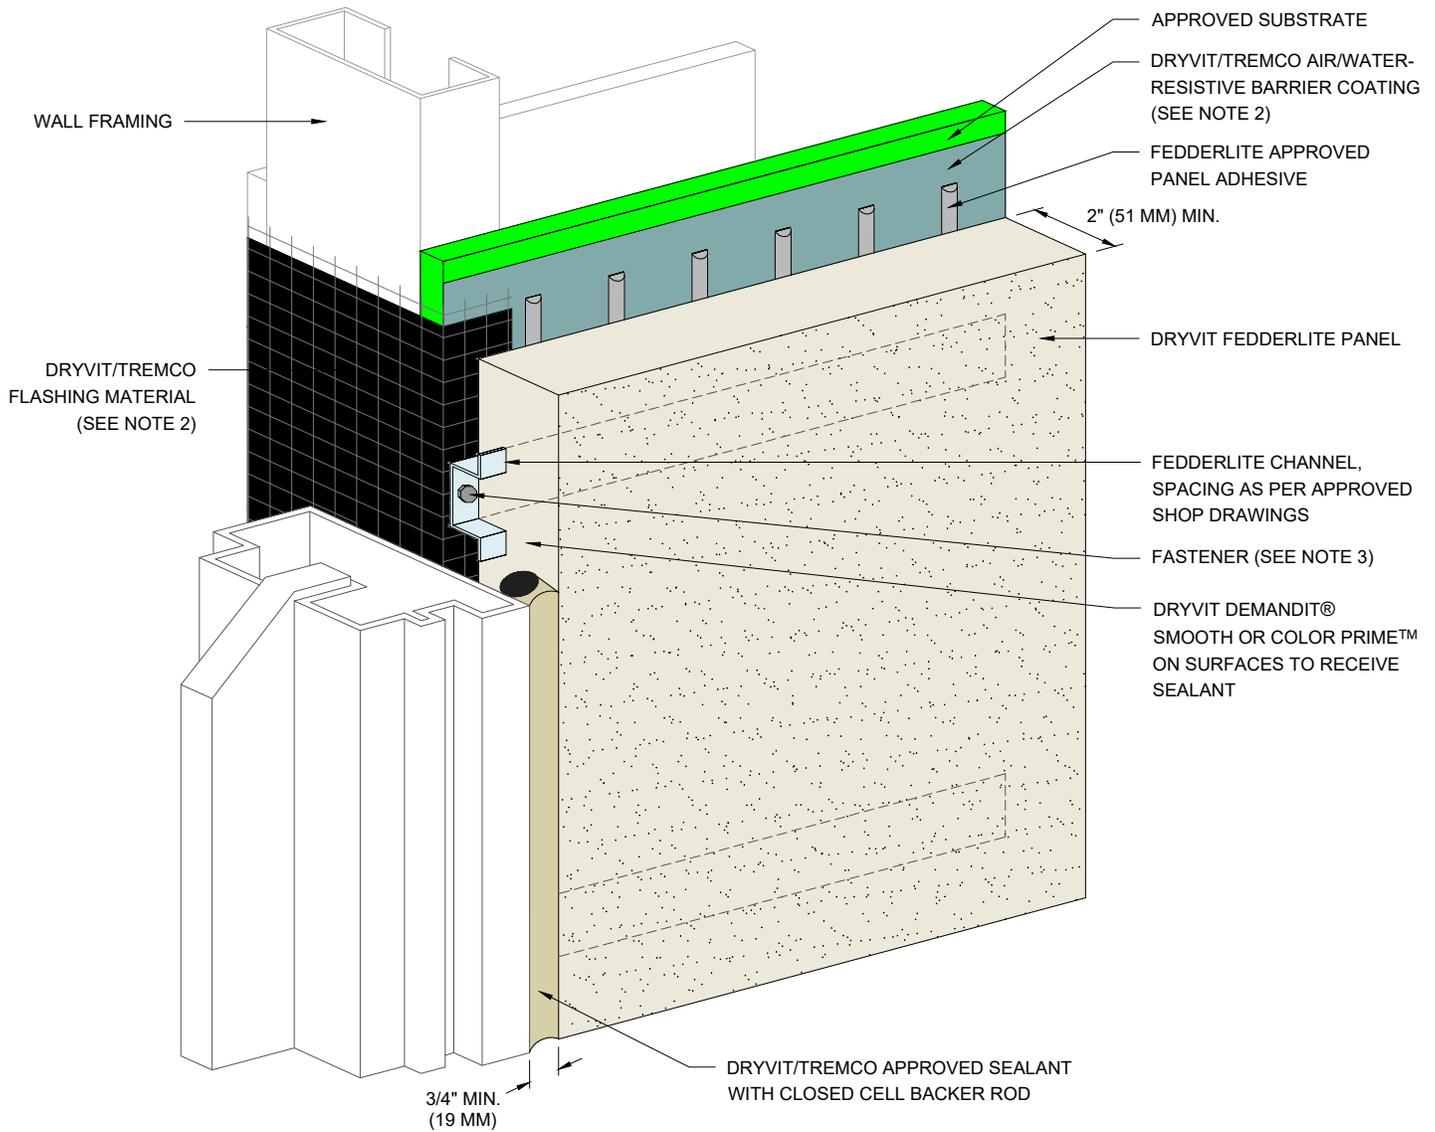

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Jamb

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-21



Construction Products Group

www.tremcocpg.com

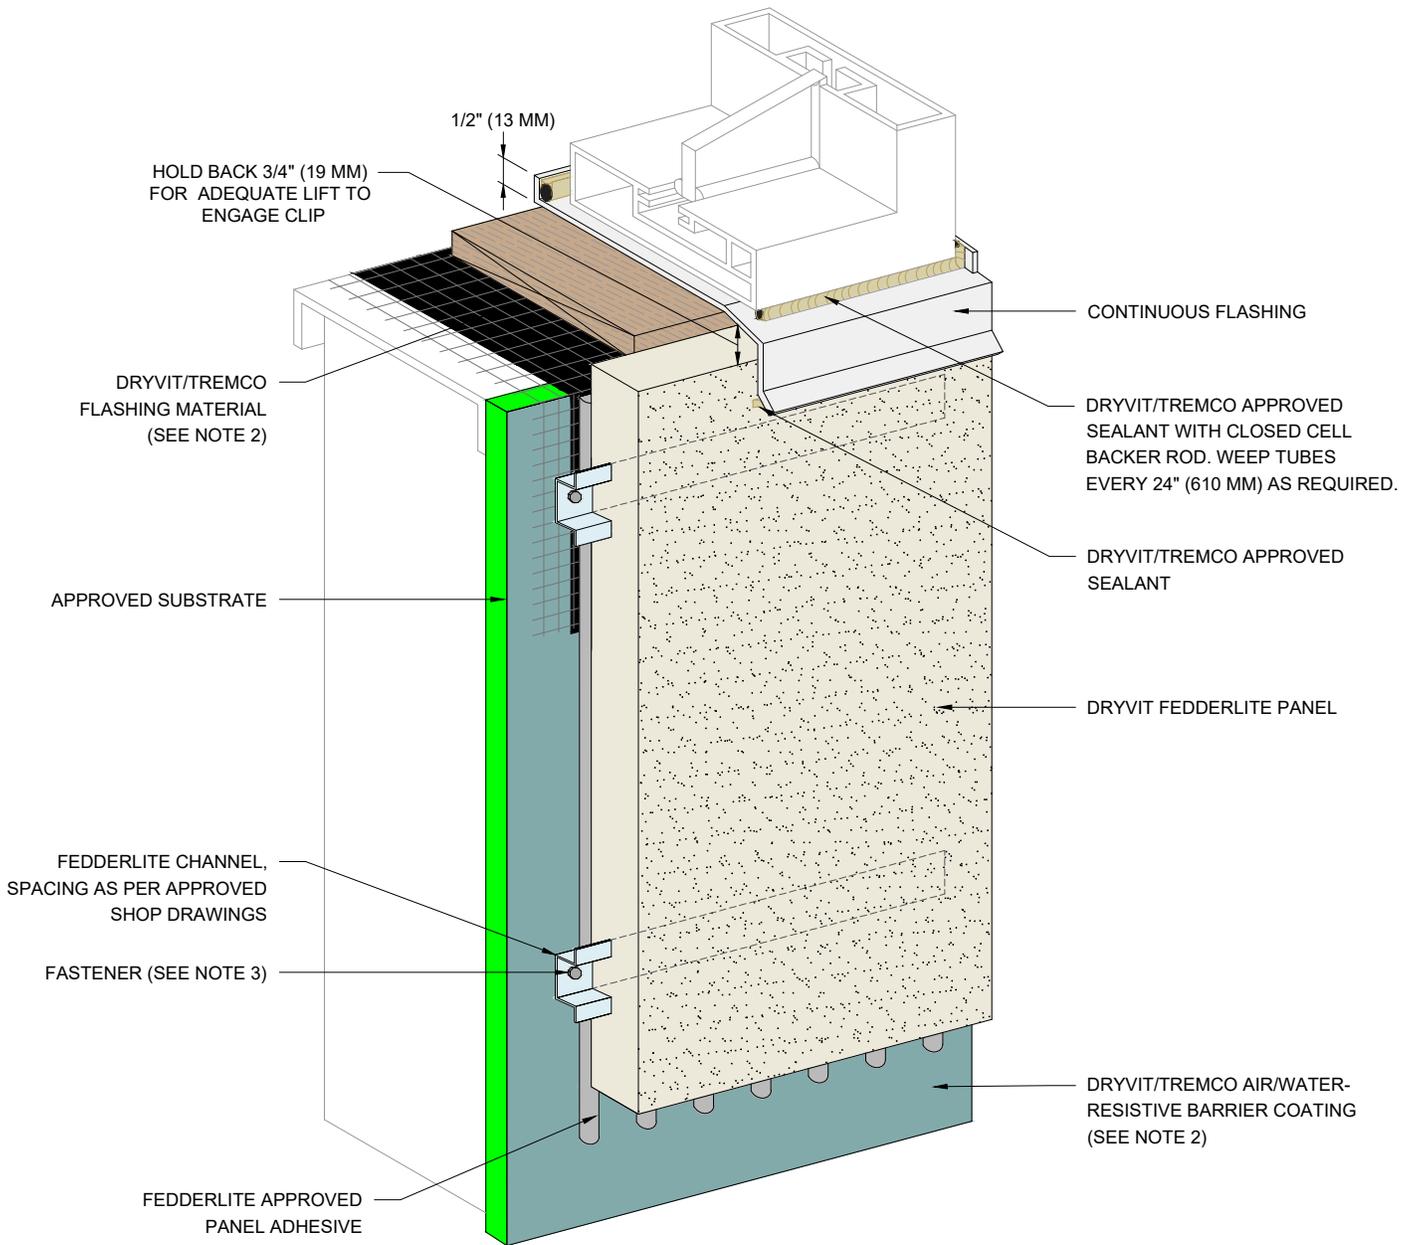

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Sill

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022



File Name:

FL-22




Construction Products Group

www.tremcocpg.com

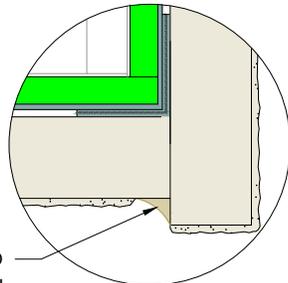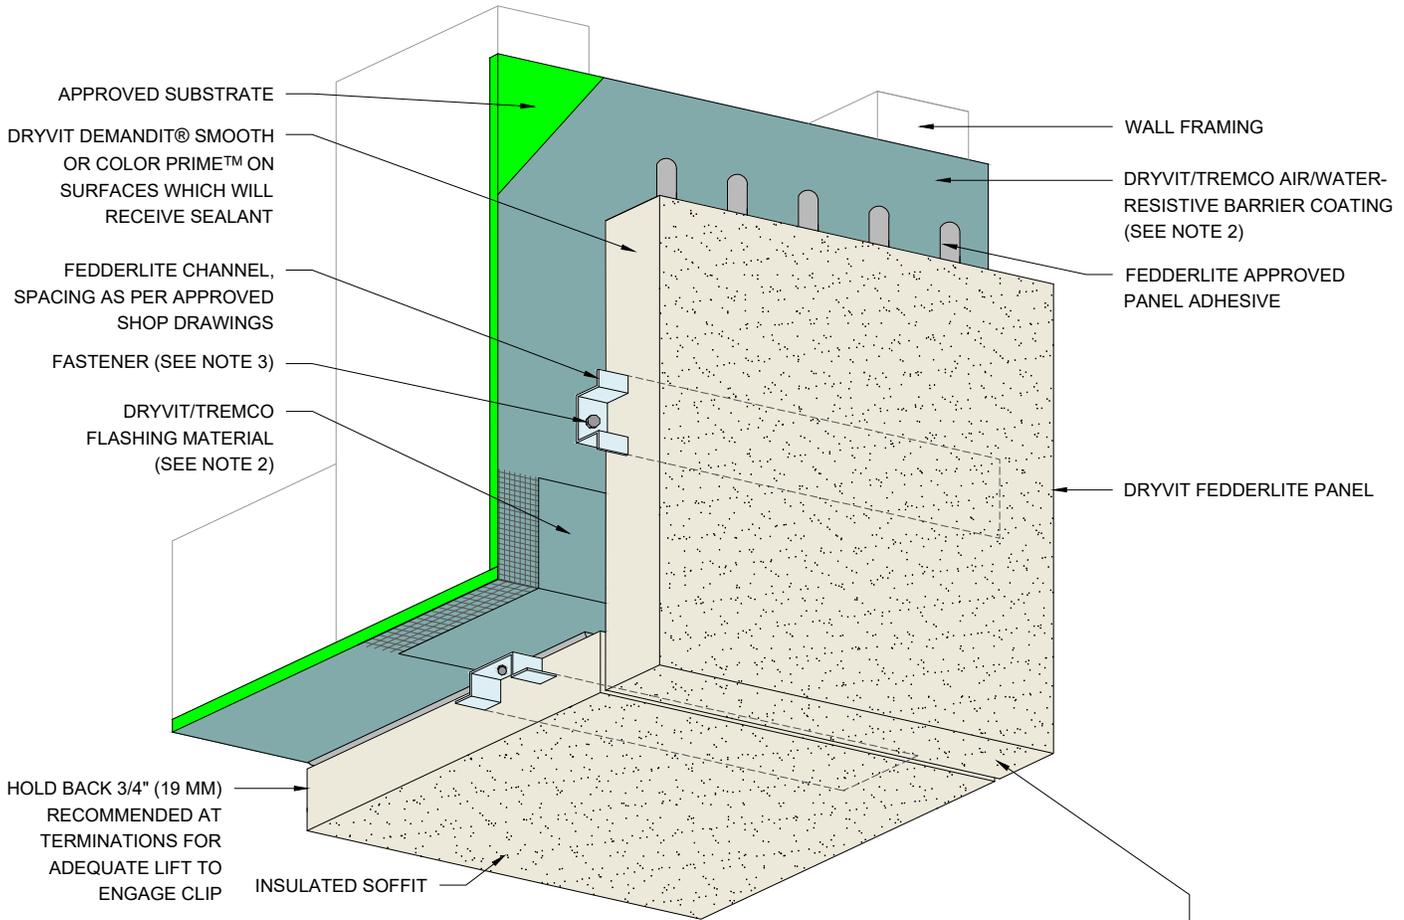


DRYVIT/TREMCO APPROVED SEALANT WITH BOND BREAKER TAPE

**WITHOUT MOISTURE DRAINAGE**

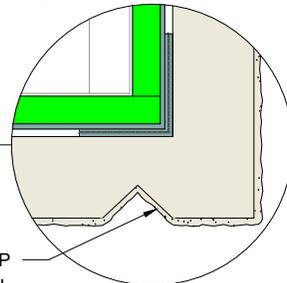

DRIP REVEAL

**CORNER PANEL OPTION WITHOUT MOISTURE DRAINAGE**

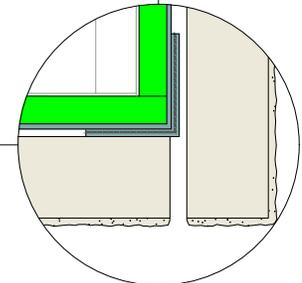

**MOISTURE DRAINAGE OPTION**

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Transition at Fascia/Soffit Intersection - Insulated

Drawn by: HDE

Checked by:

Scale: NTS


Date: 12/2022

File Name:

FL-23



www.tremcocpg.com

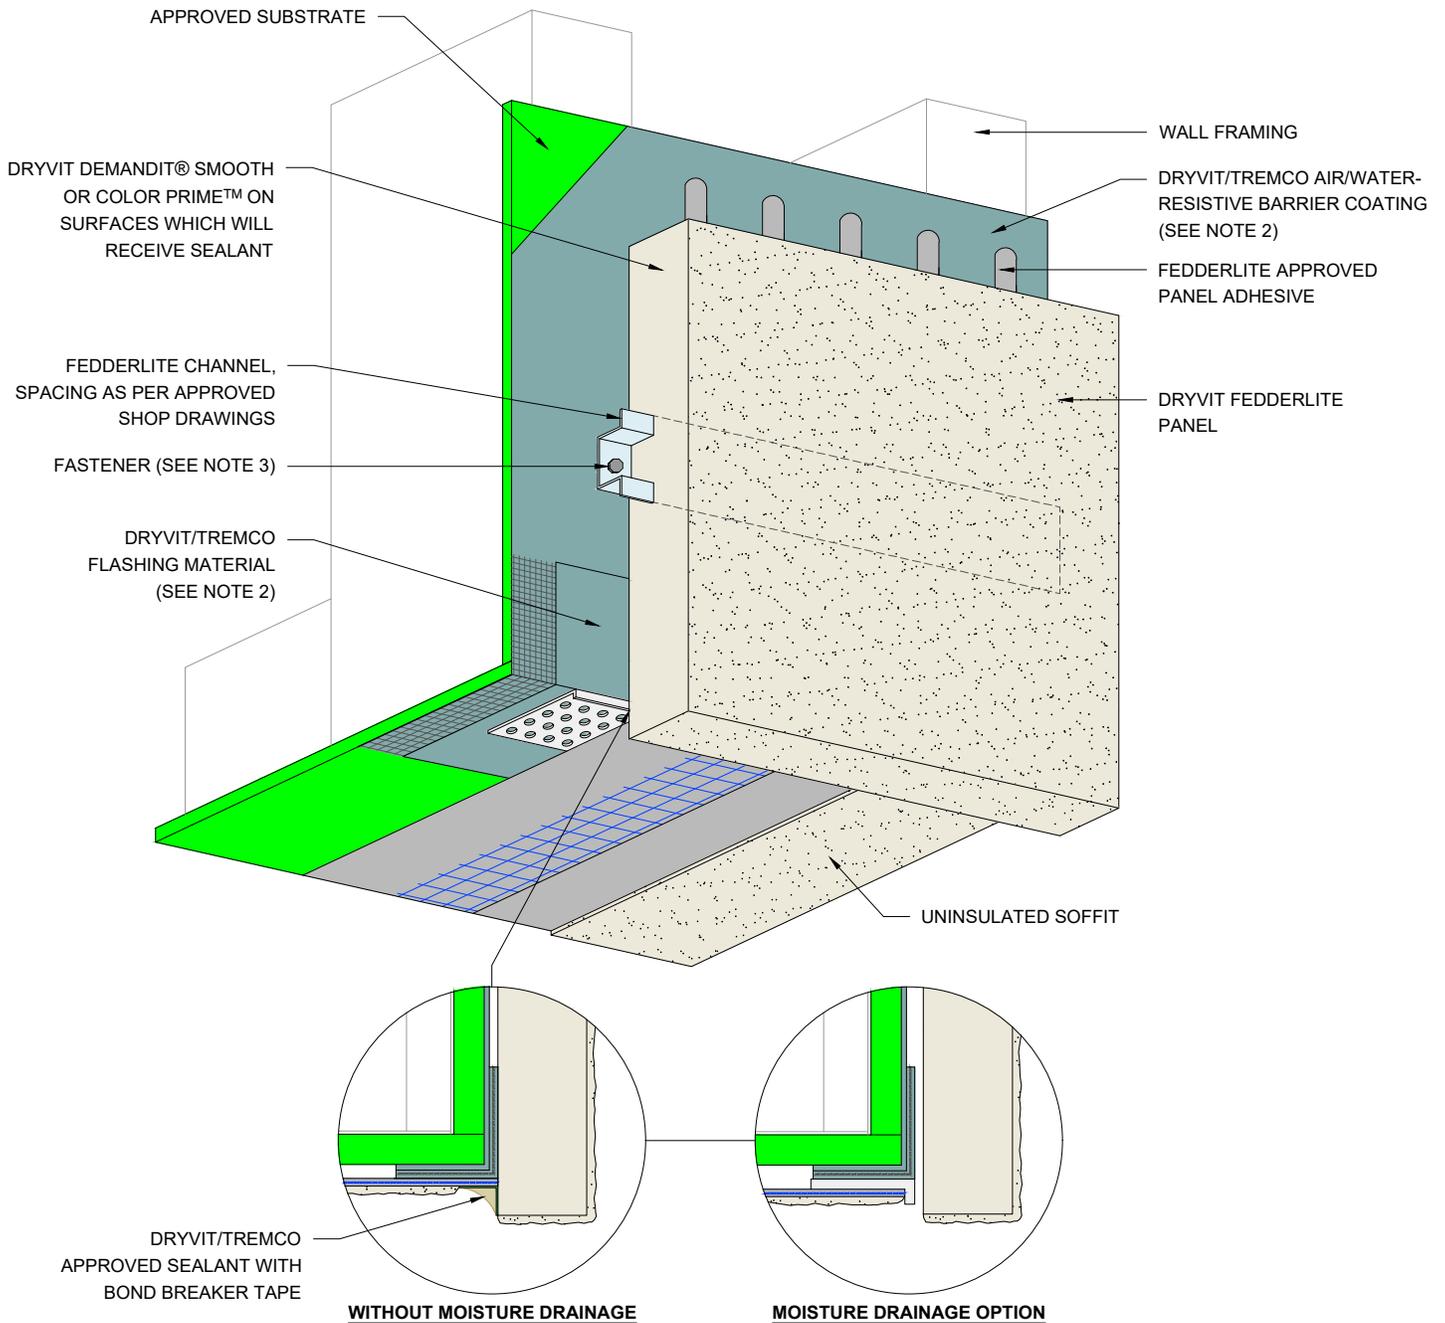

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Transition at Fascia/Soffit Intersection - Uninsulated

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-24



Construction Products Group

www.tremcocpg.com

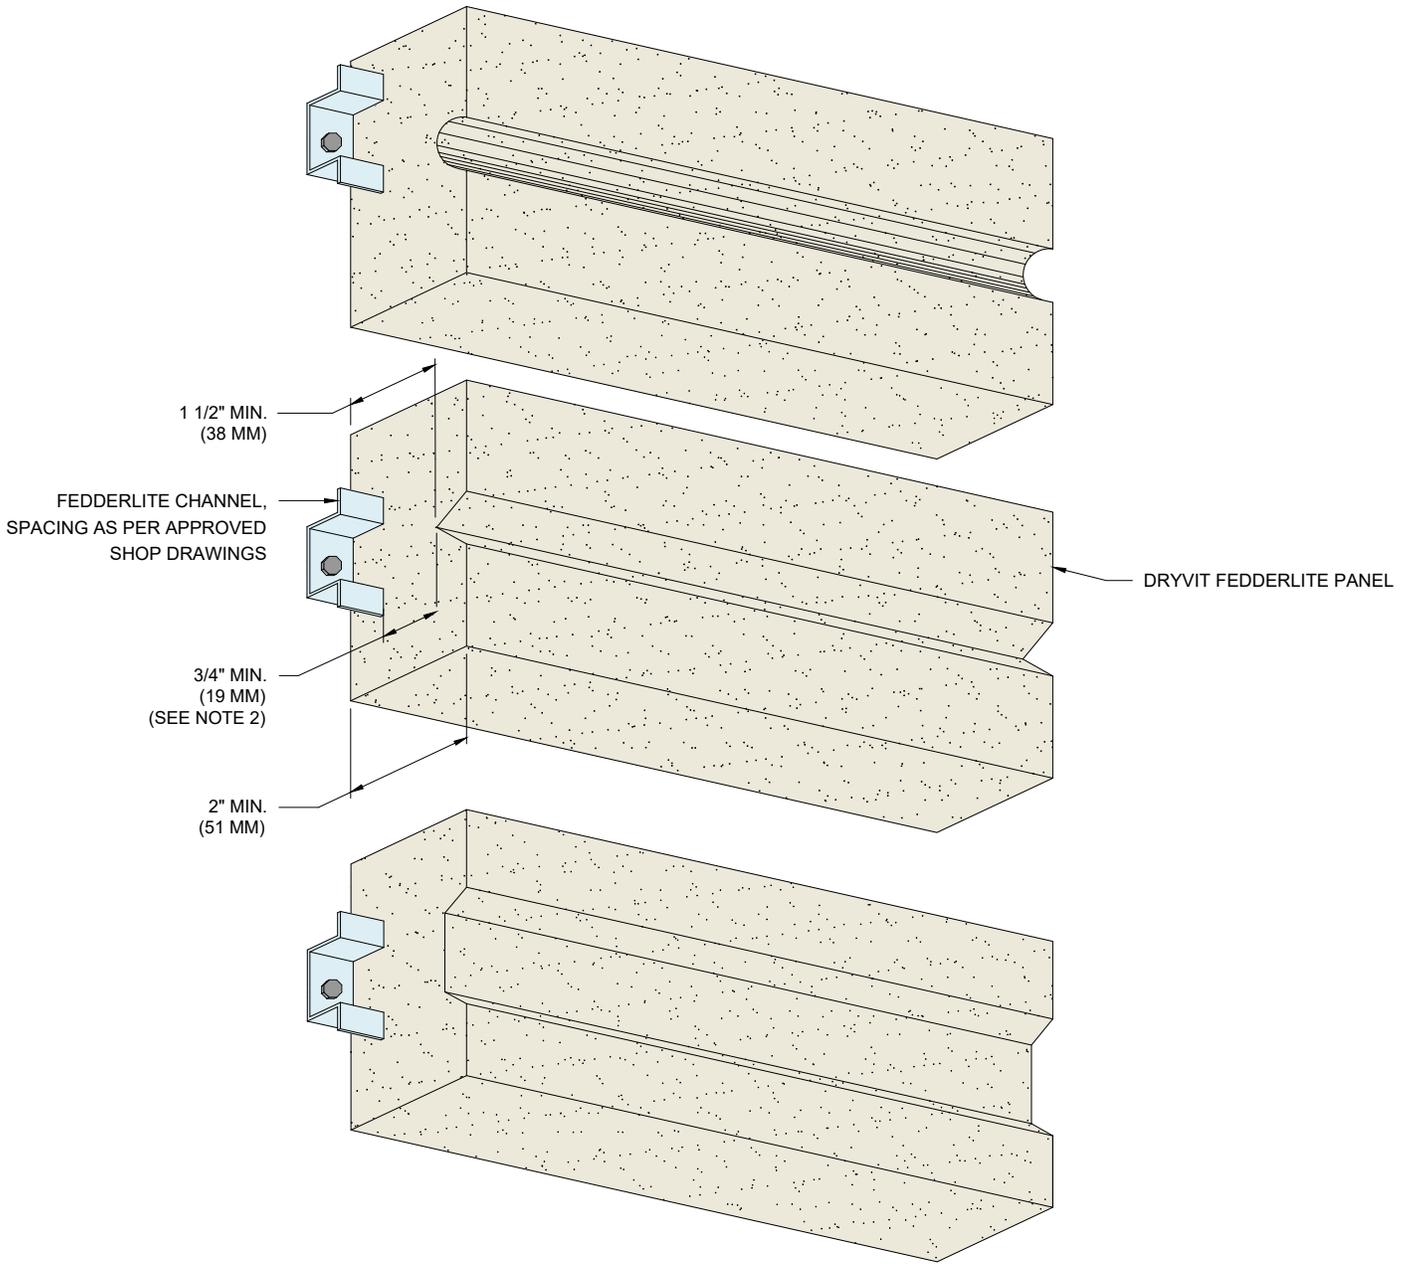

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. MAINTAIN 3/4" (19 MM) MINIMUM EPS THICKNESS BETWEEN REVEAL AND CHANNEL.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Typical Aesthetic Reveals

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-25



Construction Products Group

[www.tremcocpg.com](http://www.tremcocpg.com)

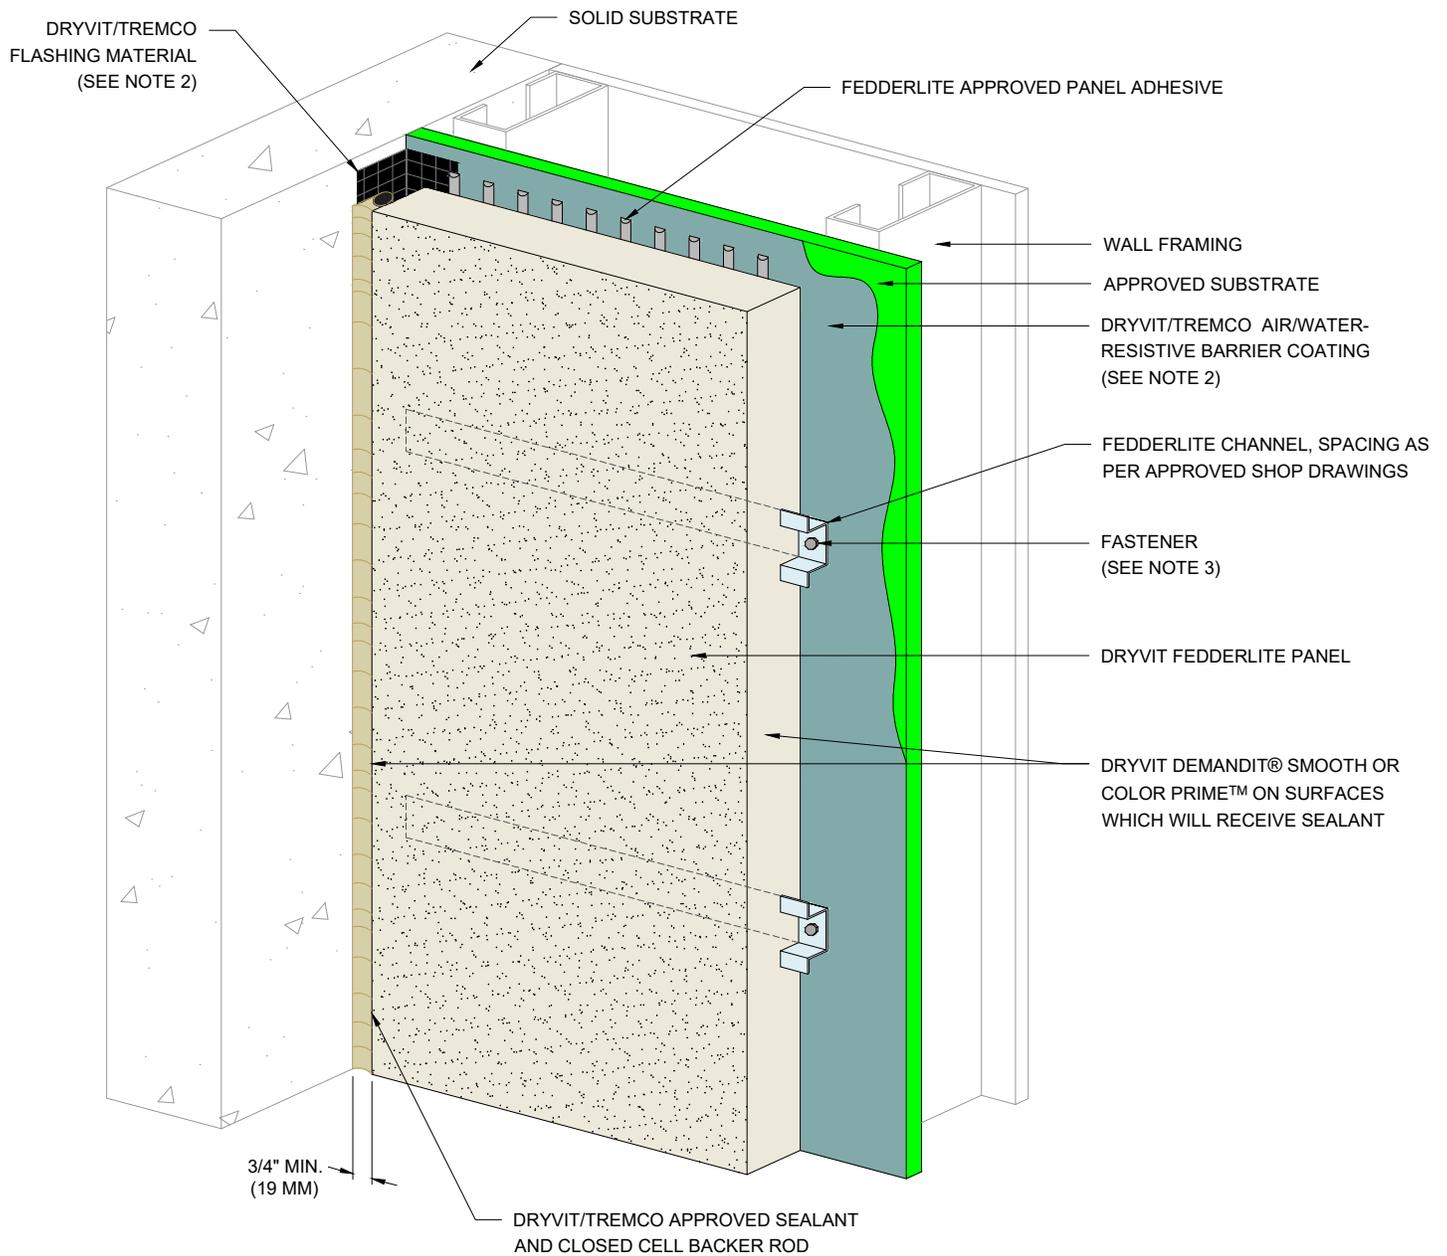

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**




Detail: Termination at Dissimilar Materials			
Drawn by: HDE	Checked by:	Scale: NTS	Date: 12/2022

File Name:

FL-26



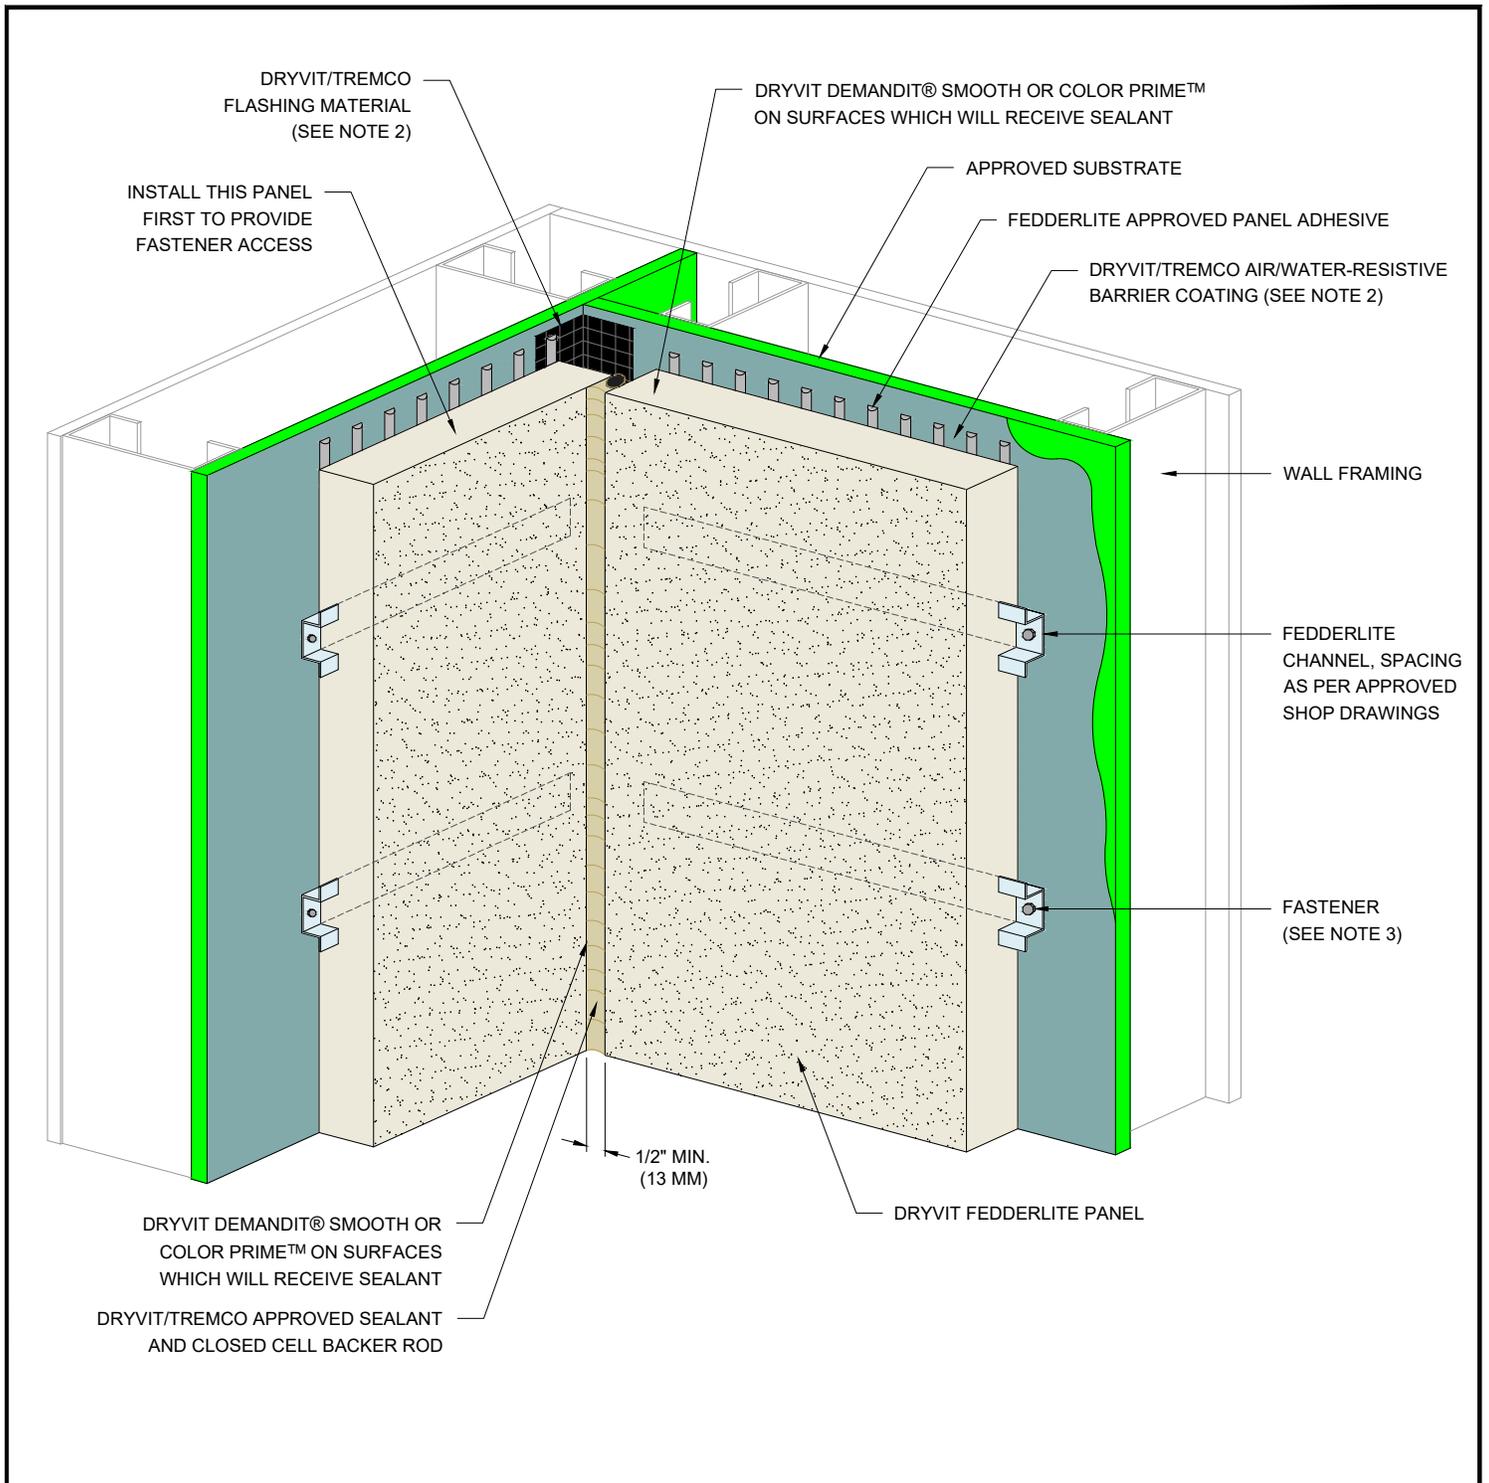

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Inside Corner Joint

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-27



Construction Products Group

[www.tremcocpg.com](http://www.tremcocpg.com)

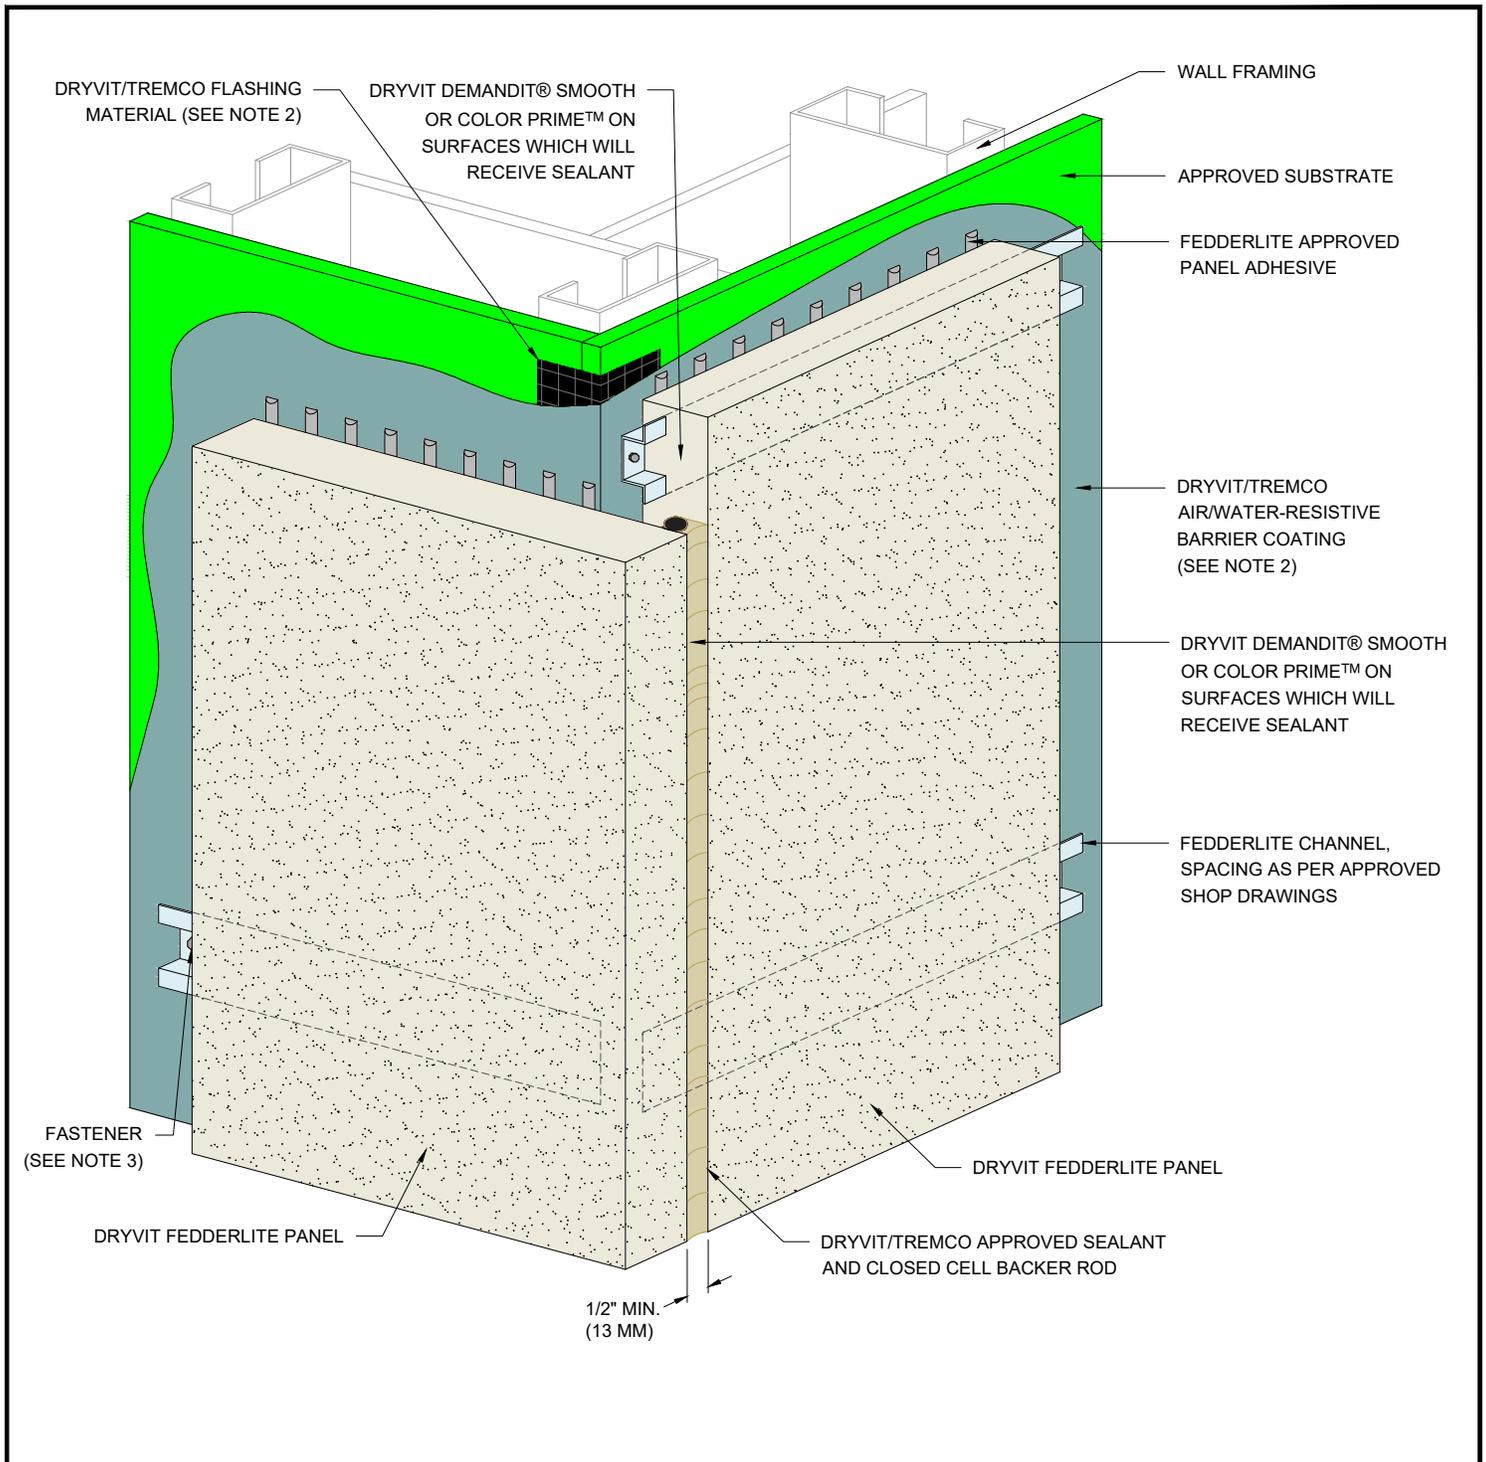

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Outside Corner Joint

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022

File Name:

FL-28



Construction Products Group

www.tremcocpg.com

DRYVIT DEMANDIT® SMOOTH  
OR COLOR PRIMET™ ON  
SURFACES WHICH WILL  
RECEIVE SEALANT

APPROVED SUBSTRATE

FEDDERLITE APPROVED PANEL ADHESIVE

DRYVIT/TREMCO AIR/WATER-RESISTIVE  
BARRIER COATING (SEE NOTE 2)

WALL FRAMING

FEDDERLITE  
CHANNEL, SPACING  
AS PER APPROVED  
SHOP DRAWINGS

FASTENER  
(SEE NOTE 3)

DRYVIT FEDDERLITE PANEL

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Inside Corner Panel

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-29



Construction Products Group

www.tremcocpg.com

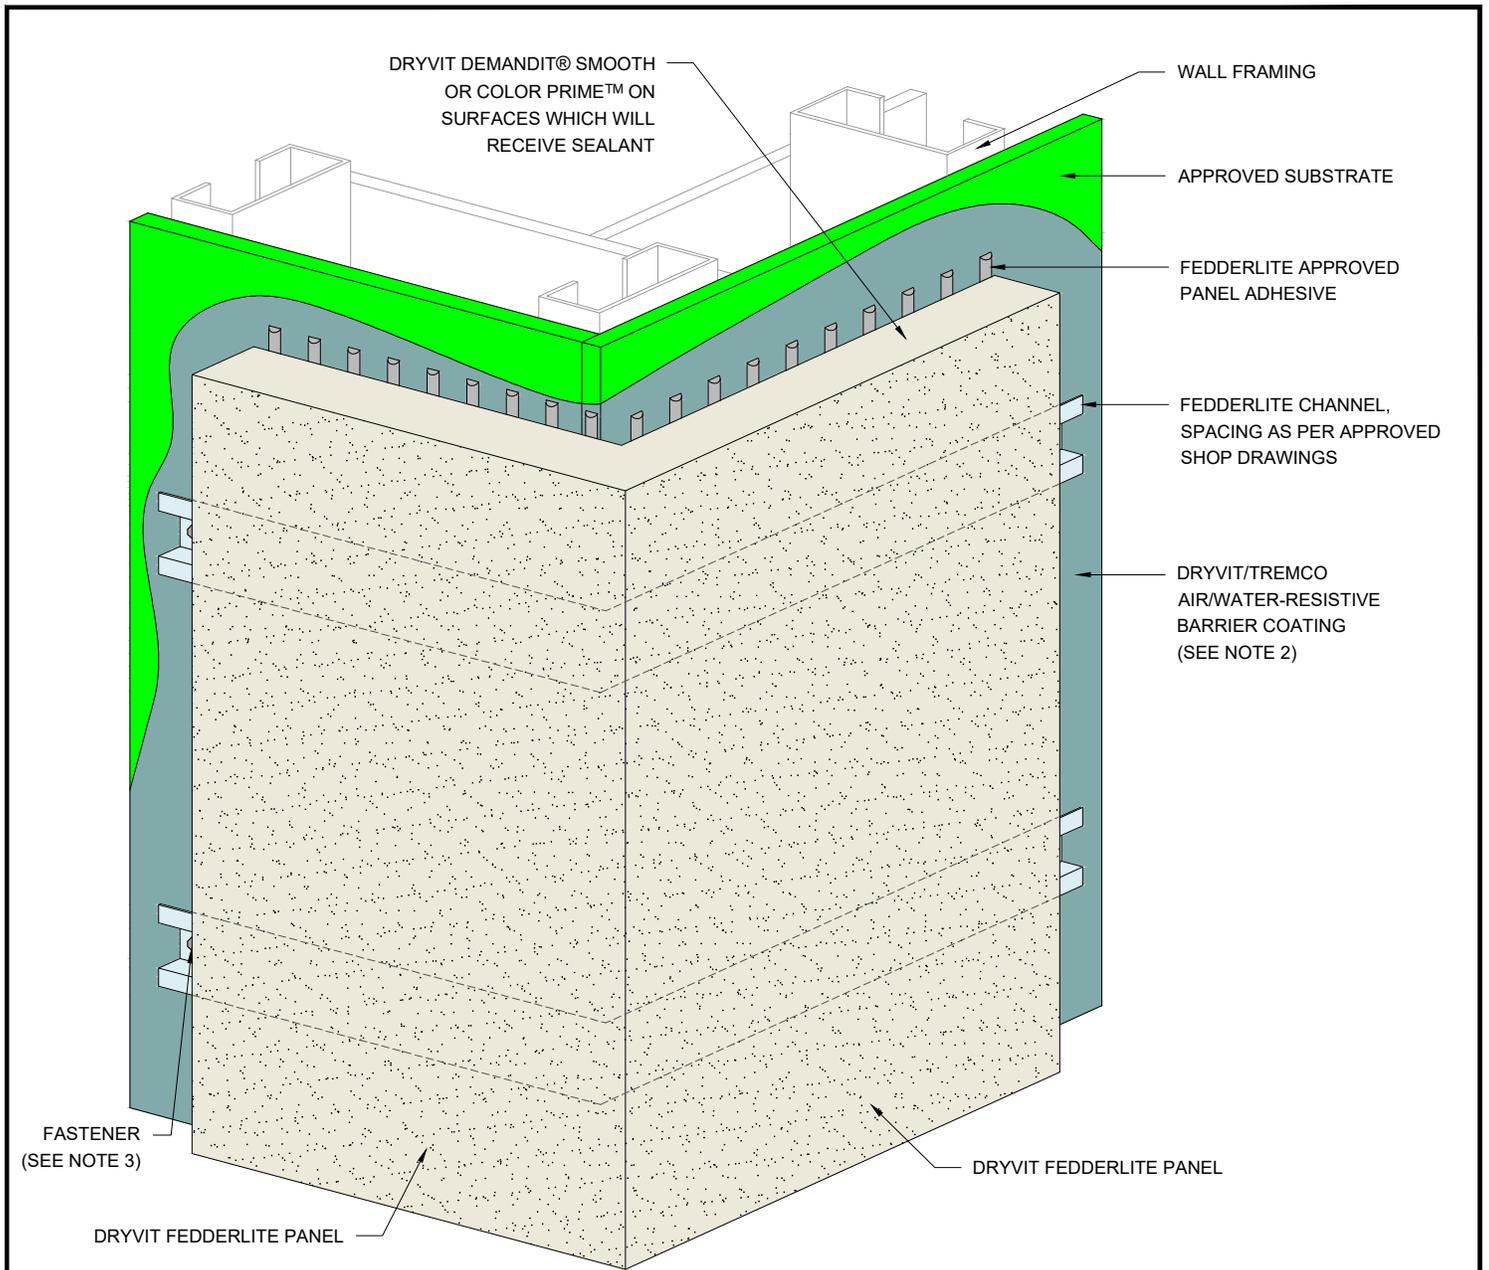

**NOTES:**

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

**Fedderlite® Panel System**



Dryvit Technical Support: 800-556-7752

Detail: Outside Corner Panel

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022


File Name:

FL-30



Construction Products Group

[www.tremcocpg.com](http://www.tremcocpg.com)

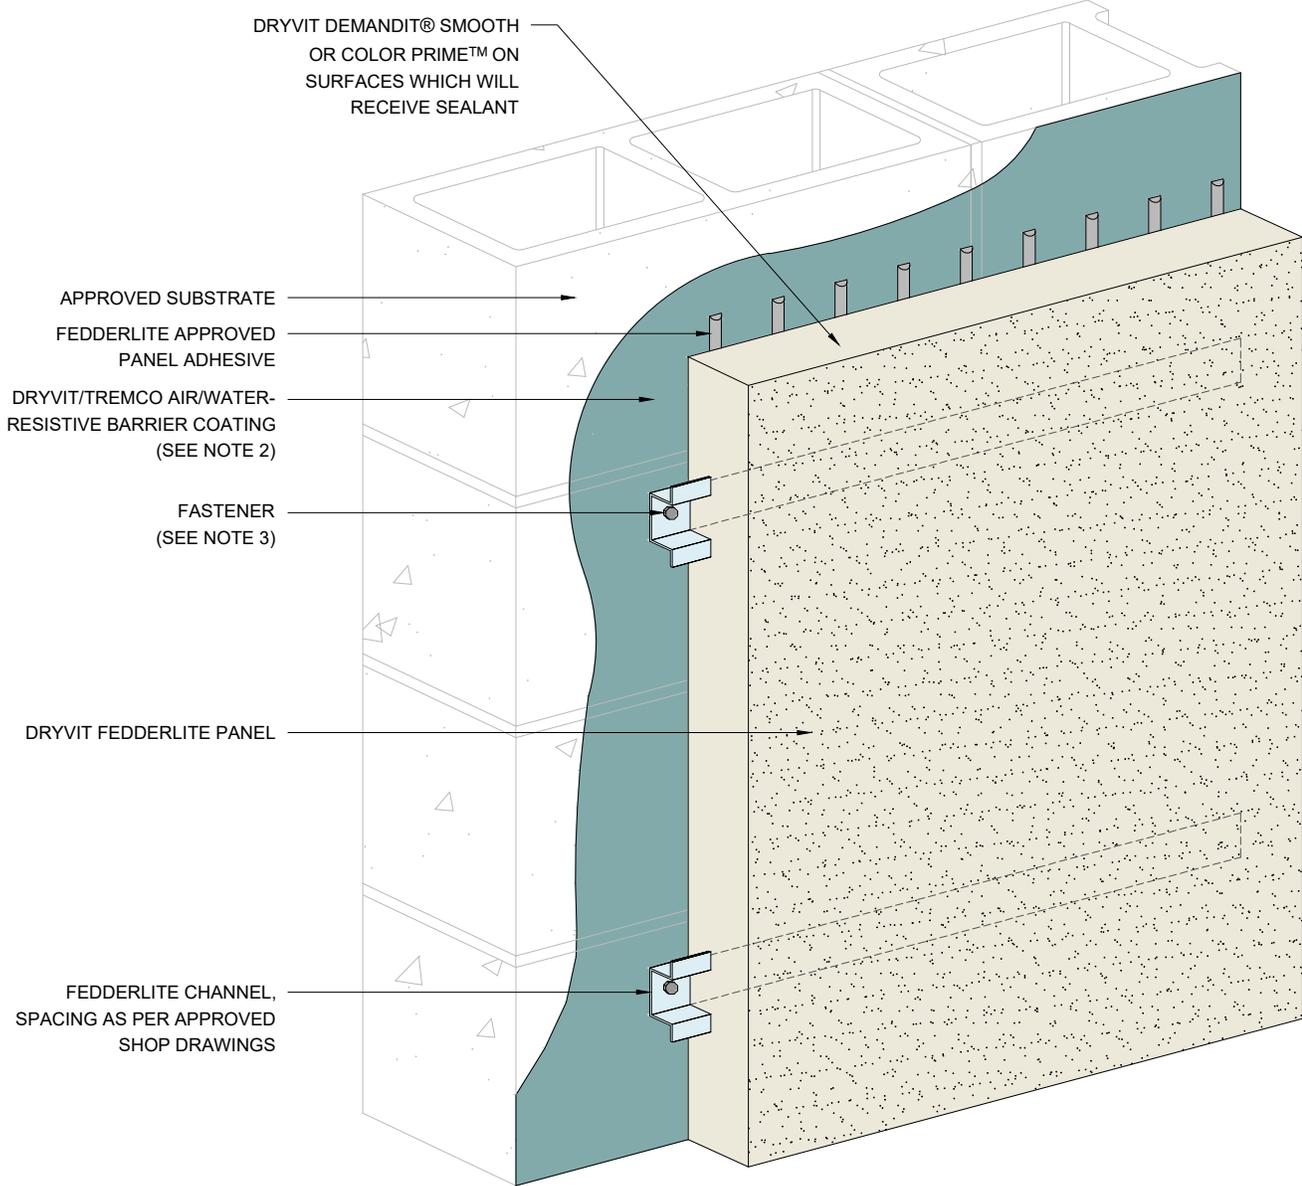

NOTES:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. REFER TO DRYVIT PUBLICATION DS840 FOR AWRB AND FLASHING APPLICATION.
3. MECHANICAL ATTACHMENTS ARE NECESSARY TO SUPPORT THE PANEL UNTIL THE ADHESIVE CURES. REFER TO DRYVIT PUBLICATION DS217.

*The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit or Tremco to ensure you have the most recent version.*

Fedderlite® Panel System



Dryvit Technical Support: 800-556-7752

Detail: Face Fastening to Solid Substrate

Drawn by: HDE

Checked by:

Scale: NTS

Date: 12/2022

File Name:

FL-31



Construction Products Group

www.tremcocpg.com